

**FRONT WHEEL ALIGNMENT > ADJUSTMENT**

**FRONT WHEEL ALIGNMENT > ADJUSTMENT**

for Preparation [Click here](#)

**NOTICE:**

If the wheel alignment has been adjusted, and if suspension or underbody components have been removed/installed or replaced, be sure to perform the following initialization procedure in order for the system to function normally:

- Perform zero point calibration of the yaw rate and acceleration sensor and the test mode inspection.

**1. PRECAUTION (w/ Air Suspension)**

**NOTICE:**

Be sure to read Precaution thoroughly before servicing ([Click here](#)).

**2. INSPECT TIRES**

- a. Inspect the tires ([Click here](#)).

**3. MEASURE VEHICLE HEIGHT**


**NOTICE:**

Before inspecting the wheel alignment, adjust the vehicle height to the specification.

- a. Press down on the vehicle several times to stabilize the suspension, and then measure the vehicle height.

**Text in Illustration**

*a	Front Side
*b	Rear Side

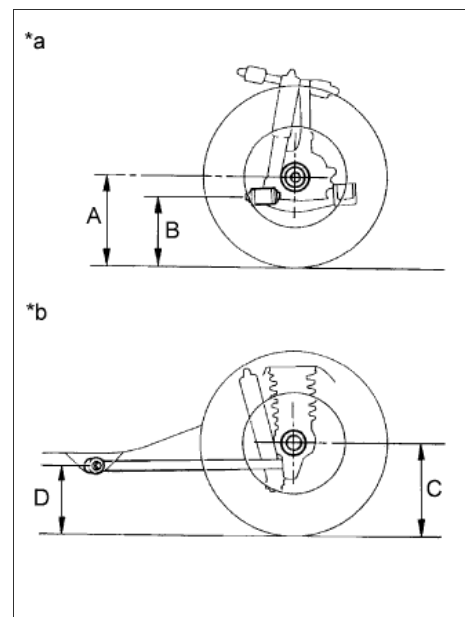

**Standard Vehicle Height (Unloaded Vehicle):**

Vehicle Model	Grade	Seating Capacity	Item	Front (A - B)	Rear (C - D)
	TX	5 - Seater	-	76.2 mm (3.00 in.)	54.3 mm (2.14 in.)
			for Double Tank Type	75.3 mm (2.96 in.)	56.5 mm (2.22 in.)
		7 - Seater	-	77.3 mm (3.04 in.)	55.5 mm (2.19 in.)
			for Double Tank Type	76.4 mm (3.01 in.)	57.5 mm (2.26 in.)
		9 - Seater	-	76.2 mm (3.00 in.)	53.8 mm (2.19 in.)
			for Double Tank Type	75.3 mm (2.96 in.)	55.8 mm (2.20 in.)
		5 - Seater	-	75.2 mm (2.96 in.)	55.5 mm (2.19 in.)

KDJ150L-GKAEY	TXL	7 - Seater		for Double Tank Type	74.3 mm (2.93 in.)	57.6 mm (2.27 in.)	
			-		76.3 mm (3.00 in.)	56.6 mm (2.23 in.)	
		9 - Seater		for Double Tank Type	75.3 mm (2.96 in.)	58.5 mm (2.30 in.)	
			-		75.2 mm (2.96 in.)	54.9 mm (2.16 in.)	
		VX	5 - Seater		for Double Tank Type	74.3 mm (2.93 in.)	56.9 mm (2.24 in.)
				-		82.5 mm (3.25 in.)	58.0 mm (2.28 in.)
	7 - Seater			for Double Tank Type	81.6 mm (3.21 in.)	59.9 mm (2.36 in.)	
			-		83.5 mm (3.29 in.)	58.9 mm (2.32 in.)	
	VXL	7 - Seater		for Double Tank Type	82.7 mm (3.26 in.)	59.9 mm (2.36 in.)	
			-		82.2 mm (3.24 in.)	66.6 mm (2.62 in.)	
	KDJ150L-GKFEY	TX	5 - Seater		for Double Tank Type	81.5 mm (3.21 in.)	66.2 mm (2.61 in.)
				-		75.0 mm (2.95 in.)	54.0 mm (2.13 in.)
7 - Seater				for Double Tank Type	74.1 mm (2.92 in.)	56.2 mm (2.21 in.)	
			-		76.1 mm (3.00 in.)	55.2 mm (2.17 in.)	
9 - Seater				for Double Tank Type	75.2 mm (2.96 in.)	57.3 mm (2.26 in.)	
			-		75.0 mm (2.95 in.)	53.4 mm (2.10 in.)	
TXL		5 - Seater		for Double Tank Type	74.0 mm (2.91 in.)	55.5 mm (2.19 in.)	
			-		76.1 mm (3.00 in.)	55.4 mm (2.18 in.)	
		7 - Seater		for Double Tank Type	75.2 mm (2.96 in.)	57.5 mm (2.26 in.)	
			-		76.0 mm (2.99 in.)	56.2 mm (2.21 in.)	
		9 - Seater		for Double Tank Type	75.0 mm (2.95 in.)	58.1 mm (2.29 in.)	
			-		76.1 mm (3.00 in.)	54.7 mm (2.15 in.)	
VX		5 - Seater		for Double Tank Type	75.2 mm (2.96 in.)	56.8 mm (2.24 in.)	
			-		81.3 mm (3.20 in.)	57.2 mm (2.25 in.)	
		7 - Seater		for Double Tank Type	80.4 mm (3.17 in.)	59.2 mm (2.33 in.)	
			-		82.4 mm (3.24 in.)	58.2 mm (2.29 in.)	
		VXL	7 - Seater		for Double Tank Type	81.6 mm (3.21 in.)	59.1 mm (2.33 in.)
				-		81.0 mm (3.19 in.)	66.3 mm (2.61 in.)
KDJ150R-GKAEY		TX	5 - Seater		for Double Tank Type	80.3 mm (3.16 in.)	65.9 mm (2.59 in.)
				-		77.2 mm (3.04 in.)	54.5 mm (2.15 in.)
			7 - Seater		for Double Tank Type	76.3 mm (3.00 in.)	56.7 mm (2.23 in.)
				-		78.2 mm (3.08 in.)	55.7 mm (2.19 in.)
			9 - Seater		for Double Tank Type	77.3 mm (3.04 in.)	57.8 mm (2.28 in.)
				-		77.2 mm (3.04 in.)	53.9 mm (2.12 in.)
	TXL	5 - Seater		for Double Tank Type	76.3 mm (3.00 in.)	56.0 mm (2.20 in.)	
			-		78.2 mm (3.08 in.)	56.4 mm (2.22 in.)	
		7 - Seater		for Double Tank Type	77.3 mm (3.04 in.)	58.5 mm (2.30 in.)	
			-		79.3 mm (3.12 in.)	57.5 mm (2.26 in.)	
					for Double Tank Type	78.3 mm (3.08 in.)	59.4 mm (2.34 in.)
				-		78.2 mm (3.08 in.)	55.7 mm (2.19 in.)

	KDJ150R-GKFEY	VX	9 - Seater	-	in.)	in.)
			for Double Tank Type	77.3 mm (3.04 in.)	57.7 mm (2.27 in.)	
		VXL	5 - Seater	-	82.5 mm (3.25 in.)	58.0 mm (2.28 in.)
				for Double Tank Type	81.6 mm (3.21 in.)	59.9 mm (2.36 in.)
			7 - Seater	-	83.6 mm (3.29 in.)	59.0 mm (2.32 in.)
				for Double Tank Type	82.8 mm (3.26 in.)	59.9 mm (2.36 in.)
	7 - Seater	-	82.2 mm (3.24 in.)	66.6 mm (2.62 in.)		
		for Double Tank Type	81.5 mm (3.21 in.)	66.2 mm (2.61 in.)		
	GRJ150L-GKAEK	TX	5 - Seater	-	77.9 mm (3.07 in.)	54.6 mm (2.15 in.)
				for Double Tank Type	76.9 mm (3.03 in.)	56.8 mm (2.24 in.)
			7 - Seater	-	78.9 mm (3.11 in.)	55.9 mm (2.20 in.)
				for Double Tank Type	78.0 mm (3.07 in.)	57.8 mm (2.28 in.)
TXL			5 - Seater	-	74.2 mm (2.92 in.)	55.3 mm (2.18 in.)
				for Double Tank Type	73.3 mm (2.89 in.)	57.4 mm (2.26 in.)
		7 - Seater	-	75.3 mm (2.96 in.)	56.4 mm (2.22 in.)	
			for Double Tank Type	74.3 mm (2.93 in.)	58.3 mm (2.30 in.)	
VX		5 - Seater	-	82.5 mm (3.25 in.)	58.0 mm (2.28 in.)	
			for Double Tank Type	81.6 mm (3.21 in.)	59.9 mm (2.36 in.)	
		7 - Seater	-	83.6 mm (3.29 in.)	59.0 mm (2.32 in.)	
			for Double Tank Type	82.8 mm (3.26 in.)	59.9 mm (2.36 in.)	
VXL		7 - Seater	-	82.2 mm (3.24 in.)	66.6 mm (2.62 in.)	
			for Double Tank Type	81.5 mm (3.21 in.)	66.2 mm (2.61 in.)	
GRJ150L-GKAEK		TX	5 - Seater	-	73.3 mm (2.89 in.)	52.9 mm (2.08 in.)
				for Double Tank Type	72.4 mm (2.85 in.)	54.6 mm (2.15 in.)
			7 - Seater	-	74.5 mm (2.93 in.)	54.1 mm (2.13 in.)
				for Double Tank Type	73.5 mm (2.89 in.)	55.6 mm (2.19 in.)
	9 - Seater		-	73.3 mm (2.89 in.)	52.3 mm (2.06 in.)	
			for Double Tank Type	72.4 mm (2.85 in.)	54.0 mm (2.13 in.)	
	TXL	5 - Seater	-	74.5 mm (2.93 in.)	54.5 mm (2.15 in.)	
			for Double Tank Type	73.6 mm (2.90 in.)	56.2 mm (2.21 in.)	
		7 - Seater	-	75.6 mm (2.98 in.)	55.6 mm (2.19 in.)	
			for Double Tank Type	74.7 mm (2.94 in.)	57.1 mm (2.25 in.)	
		9 - Seater	-	74.5 mm (2.93 in.)	53.9 mm (2.12 in.)	
			for Double Tank Type	73.6 mm (2.90 in.)	55.5 mm (2.19 in.)	
VX	5 - Seater	-	79.9 mm (3.15 in.)	56.6 mm (2.23 in.)		
		for Double Tank Type	79.1 mm (3.11 in.)	58.2 mm (2.29 in.)		
	7 - Seater	-	81.0 mm (3.19 in.)	57.6 mm (2.27 in.)		
		for Double Tank Type	80.2 mm (3.16 in.)	58.1 mm (2.29 in.)		
VXL	7 - Seater	-	79.6 mm (3.13 in.)	65.8 mm (2.59 in.)		
		for Double Tank	78.9 mm (3.11 in.)	65.4 mm (2.57 in.)		

			Type	in.)	in.)
GRJ150L-GKFEK	TX	5 - Seater	-	72.6 mm (2.86 in.)	52.7 mm (2.07 in.)
			for Double Tank Type	71.6 mm (2.82 in.)	54.4 mm (2.14 in.)
		7 - Seater	-	73.7 mm (2.90 in.)	53.9 mm (2.12 in.)
			for Double Tank Type	72.7 mm (2.86 in.)	55.4 mm (2.18 in.)
		9 - Seater	-	72.5 mm (2.85 in.)	52.1 mm (2.05 in.)
			for Double Tank Type	71.6 mm (2.82 in.)	53.8 mm (2.12 in.)
	TXL	5 - Seater	-	73.7 mm (2.90 in.)	54.0 mm (2.13 in.)
			for Double Tank Type	72.8 mm (2.87 in.)	55.9 mm (2.20 in.)
		7 - Seater	-	74.9 mm (2.95 in.)	55.2 mm (2.17 in.)
			for Double Tank Type	73.9 mm (2.91 in.)	56.7 mm (2.23 in.)
		9 - Seater	-	73.7 mm (2.90 in.)	53.4 mm (2.10 in.)
			for Double Tank Type	72.8 mm (2.87 in.)	55.0 mm (2.17 in.)
VX	5 - Seater	-	82.5 mm (3.25 in.)	56.6 mm (2.23 in.)	
		for Double Tank Type	81.6 mm (3.21 in.)	58.2 mm (2.29 in.)	
	7 - Seater	-	83.6 mm (3.29 in.)	57.7 mm (2.27 in.)	
		for Double Tank Type	82.8 mm (3.26 in.)	58.2 mm (2.29 in.)	
VXL	7 - Seater	-	82.1 mm (3.23 in.)	66.3 mm (2.61 in.)	
		for Double Tank Type	81.4 mm (3.20 in.)	65.9 mm (2.59 in.)	
LJ150L-GKMEE	TX	5 - Seater	-	74.1 mm (2.92 in.)	53.8 mm (2.12 in.)
			for Double Tank Type	73.7 mm (2.90 in.)	51.1 mm (2.01 in.)
		7 - Seater	-	75.2 mm (2.96 in.)	55.0 mm (2.17 in.)
			for Double Tank Type	74.2 mm (2.92 in.)	57.0 mm (2.24 in.)
		9 - Seater	-	74.2 mm (2.92 in.)	52.8 mm (2.08 in.)
			for Double Tank Type	73.2 mm (2.88 in.)	54.9 mm (2.16 in.)
	TXL	5 - Seater	-	74.7 mm (2.94 in.)	56.6 mm (2.23 in.)
			for Double Tank Type	73.8 mm (2.91 in.)	58.6 mm (2.31 in.)
		7 - Seater	-	75.8 mm (2.98 in.)	57.6 mm (2.27 in.)
			for Double Tank Type	74.9 mm (2.95 in.)	59.5 mm (2.34 in.)
		9 - Seater	-	74.8 mm (2.94 in.)	55.4 mm (2.18 in.)
			for Double Tank Type	73.9 mm (2.91 in.)	57.4 mm (2.26 in.)
LJ150R-GKMEE	TX	5 - Seater	-	76.0 mm (2.99 in.)	53.6 mm (2.11 in.)
			for Double Tank Type	75.1 mm (2.96 in.)	55.8 mm (2.20 in.)
		7 - Seater	-	77.1 mm (3.04 in.)	54.9 mm (2.16 in.)
			for Double Tank Type	76.2 mm (3.00 in.)	56.9 mm (2.24 in.)
		9 - Seater	-	76.1 mm (3.00 in.)	52.6 mm (2.07 in.)
			for Double Tank Type	75.2 mm (2.96 in.)	54.5 mm (2.15 in.)
		5 - Seater	-	76.4 mm (3.01 in.)	56.4 mm (2.22 in.)
			for Double Tank Type	75.4 mm (2.97 in.)	58.5 mm (2.30 in.)
			-	77.5 mm (3.05 in.)	57.4 mm (2.26 in.)
			-		

	TXL	7 - Seater	-	76.5 mm (3.01 in.)	59.3 mm (2.33 in.)		
			for Double Tank Type	76.5 mm (3.01 in.)	59.3 mm (2.33 in.)		
		9 - Seater	-	76.4 mm (3.01 in.)	55.2 mm (2.17 in.)		
			for Double Tank Type	75.8 mm (2.98 in.)	57.3 mm (2.26 in.)		
TRJ150L-GKPEK	TX	5 - Seater	-	75.0 mm (2.95 in.)	52.5 mm (2.07 in.)		
			for Double Tank Type	74.0 mm (2.91 in.)	54.2 mm (2.13 in.)		
		7 - Seater	-	76.2 mm (3.00 in.)	53.8 mm (2.12 in.)		
			for Double Tank Type	75.2 mm (2.96 in.)	55.3 mm (2.18 in.)		
		9 - Seater	-	75.0 mm (2.95 in.)	51.7 mm (2.04 in.)		
			-	-	-		
	TXL	5 - Seater	-	75.7 mm (2.98 in.)	55.1 mm (2.17 in.)		
			for Double Tank Type	74.8 mm (2.94 in.)	56.6 mm (2.23 in.)		
		7 - Seater	-	76.9 mm (3.03 in.)	56.2 mm (2.21 in.)		
			for Double Tank Type	76.0 mm (2.99 in.)	57.6 mm (2.27 in.)		
		9 - Seater	-	75.8 mm (2.98 in.)	53.9 mm (2.12 in.)		
			-	-	-		
TRJ150L-GKMEK	TX	5 - Seater	-	74.9 mm (2.95 in.)	53.2 mm (2.09 in.)		
			for Double Tank Type	73.9 mm (2.91 in.)	55.0 mm (2.17 in.)		
		7 - Seater	-	76.0 mm (2.99 in.)	54.5 mm (2.15 in.)		
			for Double Tank Type	75.1 mm (2.96 in.)	56.0 mm (2.20 in.)		
		TXL	5 - Seater	-	75.6 mm (2.98 in.)	55.8 mm (2.20 in.)	
				for Double Tank Type	74.7 mm (2.94 in.)	57.4 mm (2.26 in.)	
	7 - Seater		-	76.9 mm (3.03 in.)	56.4 mm (2.22 in.)		
			for Double Tank Type	75.9 mm (2.99 in.)	57.9 mm (2.28 in.)		
	9 - Seater		-	75.9 mm (2.99 in.)	57.9 mm (2.28 in.)		
			-	-	-		
	TRJ150R-GKMEK	TX	5 - Seater	-	74.0 mm (2.91 in.)	52.0 mm (2.05 in.)	
				for Double Tank Type	73.0 mm (2.87 in.)	53.8 mm (2.12 in.)	
7 - Seater			-	75.2 mm (2.96 in.)	53.3 mm (2.10 in.)		
			for Double Tank Type	74.2 mm (2.92 in.)	54.9 mm (2.16 in.)		
TXL			5 - Seater	-	74.4 mm (2.93 in.)	54.5 mm (2.15 in.)	
				for Double Tank Type	73.5 mm (2.89 in.)	56.2 mm (2.21 in.)	
		7 - Seater	-	75.6 mm (2.98 in.)	55.1 mm (2.17 in.)		
			for Double Tank Type	74.6 mm (2.94 in.)	57.1 mm (2.25 in.)		
		9 - Seater	-	74.6 mm (2.94 in.)	57.1 mm (2.25 in.)		
			-	-	-		
		TX	2 - Seater	-	79.6 mm (3.13 in.)	52.3 mm (2.06 in.)	
				for Cold Area	81.6 mm (3.21 in.)	52.9 mm (2.08 in.)	
	5 - Seater		-	80.7 mm (3.18 in.)	55.5 mm (2.19 in.)		
			Spare Tire Less	79.7 mm (3.14 in.)	51.0 mm (2.01 in.)		
			for Cold Area	82.9 mm (3.26 in.)	56.1 mm (2.21 in.)		
			-	81.8 mm (3.22 in.)	56.7 mm (2.23 in.)		
	7 - Seater		-	81.8 mm (3.22 in.)	56.7 mm (2.23 in.)		
			for Cold Area	83.9 mm (3.30 in.)	57.3 mm (2.26 in.)		
	2 - Seater		-	80.6 mm (3.17 in.) (*1)	54.1 mm (2.13 in.) (*1)		
			for Cold Area	80.7 mm (3.18 in.) (*2)	54.2 mm (2.13 in.) (*2)		

KDJ150L-GKAEYW	TXL	5 - Seater	-	81.5 mm (3.21 in.)	57.5 mm (2.26 in.)
			for Cold Area	83.6 mm (3.29 in.)	58.1 mm (2.29 in.)
		7 - Seater	-	82.5 mm (3.25 in.)	58.6 mm (2.31 in.)
			for Cold Area	84.6 mm (3.33 in.)	59.2 mm (2.33 in.)
	VX	5 - Seater	-	81.6 mm (3.21 in.) (*1) 81.5 mm (3.21 in.) (*2)	58.3 mm (2.30 in.) (*1) 58.2 mm (2.29 in.) (*2)
			for Cold Area	82.1 mm (3.23 in.)	58.6 mm (2.31 in.) (*1) 58.5 mm (2.30 in.) (*2)
		7 - Seater	-	82.6 mm (3.25 in.)	59.3 mm (2.33 in.) (*1) 59.2 mm (2.33 in.) (*2)
			for Cold Area	83.1 mm (3.27 in.)	59.6 mm (2.35 in.) (*1) 59.5 mm (2.34 in.) (*2)
	VXL	5 - Seater	-	80.8 mm (3.18 in.) (*1) 80.7 mm (3.18 in.) (*2)	66.6 mm (2.62 in.) (*1) 66.4 mm (2.61 in.) (*2)
			for Cold Area	81.3 mm (3.20 in.)	66.8 mm (2.63 in.) (*1) 66.7 mm (2.63 in.) (*2)
		7 - Seater	-	81.9 mm (3.22 in.)	66.6 mm (2.62 in.)
			for Cold Area	82.4 mm (3.24 in.)	66.9 mm (2.63 in.) (*1) 66.8 mm (2.63 in.) (*2)
KDJ150L-GKFEYW	TX	2 - Seater	-	78.5 mm (3.09 in.)	50.7 mm (2.00 in.)
			for Cold Area	80.6 mm (3.17 in.)	51.2 mm (2.02 in.)
		5 - Seater	-	79.8 mm (3.14 in.)	55.3 mm (2.18 in.)
			Spare Tire Less	79.1 mm (3.11 in.)	50.8 mm (2.00 in.)
			for Cold Area	82.0 mm (3.23 in.)	55.9 mm (2.20 in.)
		7 - Seater	-	80.9 mm (3.19 in.)	56.5 mm (2.22 in.)
	for Cold Area		83.0 mm (3.27 in.)	57.0 mm (2.24 in.)	
	TXL	2 - Seater	-	79.4 mm (3.13 in.)	53.8 mm (2.12 in.)
			for Cold Area	81.5 mm (3.21 in.)	54.4 mm (2.14 in.)
		5 - Seater	-	80.9 mm (3.19 in.)	57.4 mm (2.26 in.)
			for Cold Area	83.0 mm (3.27 in.)	58.0 mm (2.28 in.)
		7 - Seater	-	81.9 mm (3.22 in.)	58.4 mm (2.30 in.)
			for Cold Area	84.0 mm (3.31 in.)	59.0 mm (2.32 in.)
	VX	5 - Seater	-	80.4 mm (3.17 in.)	57.6 mm (2.27 in.) (*1) 57.4 mm (2.26 in.) (*2)
			for Cold Area	81.0 mm (3.19 in.)	57.8 mm (2.28 in.) (*1) 57.7 mm (2.27 in.) (*2)
		7 - Seater	-	81.5 mm (3.21 in.) (*1) 81.4 mm (3.20 in.) (*2)	58.5 mm (2.30 in.)
for Cold Area			82.0 mm (3.23 in.)	58.8 mm (2.31 in.)	
	5 - Seater	-	79.9 mm (3.15 in.)	66.3 mm (2.61 in.)	
		for Cold Area	80.5 mm (3.17 in.) (*1)	66.6 mm (2.62 in.)	

KDJ150R- GKAEYW	VXL			80.4 mm (3.17 in.) (*2)		
		7 - Seater	-	81.0 mm (3.19 in.)	66.4 mm (2.61 in.)	
			for Cold Area	81.5 mm (3.21 in.)	66.7 mm (2.63 in.) (*1) 66.6 mm (2.62 in.) (*2)	
	TX	2 - Seater	-	82.6 mm (3.25 in.)	53.5 mm (2.11 in.)	
			for Cold Area	78.3 mm (3.08 in.)	52.7 mm (2.07 in.)	
		5 - Seater	-	83.8 mm (3.30 in.)	56.1 mm (2.21 in.)	
			Spare Tire Less	82.8 mm (3.26 in.)	51.7 mm (2.04 in.)	
			for Cold Area	79.6 mm (3.13 in.)	55.4 mm (2.18 in.)	
			-	84.7 mm (3.33 in.)	58.8 mm (2.31 in.)	
		7 - Seater	-	80.5 mm (3.17 in.)	58.0 mm (2.28 in.)	
			for Cold Area	80.5 mm (3.17 in.)	58.0 mm (2.28 in.)	
		TXL	2 - Seater	-	83.8 mm (3.30 in.)	53.7 mm (2.11 in.) (*1) 53.8 mm (2.12 in.) (*2)
				for Cold Area	78.9 mm (3.11 in.)	52.8 mm (2.08 in.)
			5 - Seater	-	84.8 mm (3.34 in.)	58.2 mm (2.29 in.)
				for Cold Area	80.6 mm (3.17 in.)	57.5 mm (2.26 in.)
	7 - Seater		-	85.9 mm (3.38 in.)	59.4 mm (2.34 in.)	
			for Cold Area	81.6 mm (3.21 in.)	58.6 mm (2.31 in.)	
	VX	5 - Seater	-	81.9 mm (3.22 in.) (*1) 81.8 mm (3.22 in.) (*2)	58.4 mm (2.30 in.) (*1) 58.3 mm (2.30 in.) (*2)	
for Cold Area			83.0 mm (3.27 in.)	58.8 mm (2.31 in.)		
7 - Seater		-	82.9 mm (3.26 in.)	59.3 mm (2.33 in.)		
		for Cold Area	83.9 mm (3.30 in.)	59.7 mm (2.35 in.)		
VXL	5 - Seater	-	81.1 mm (3.19 in.)	66.6 mm (2.62 in.)		
		for Cold Area	82.2 mm (3.24 in.)	67.0 mm (2.64 in.)		
	7 - Seater	-	82.2 mm (3.24 in.)	66.7 mm (2.63 in.) (*1) 66.6 mm (2.62 in.) (*2)		
		for Cold Area	83.2 mm (3.28 in.)	67.0 mm (2.64 in.)		
KDJ150R- GKFEYW	TX	2 - Seater	-	81.4 mm (3.20 in.)	53.2 mm (2.09 in.)	
			for Cold Area	77.1 mm (3.04 in.)	52.4 mm (2.06 in.)	
		5 - Seater	-	82.6 mm (3.25 in.)	55.9 mm (2.20 in.)	
			Spare Tire Less	81.9 mm (3.22 in.)	51.2 mm (2.02 in.)	
			for Cold Area	78.4 mm (3.09 in.)	55.1 mm (2.17 in.)	
			-	83.6 mm (3.29 in.)	57.0 mm (2.24 in.)	
	7 - Seater	-	79.5 mm (3.13 in.)	56.3 mm (2.22 in.)		
		for Cold Area	79.5 mm (3.13 in.)	56.3 mm (2.22 in.)		
	TXL	2 - Seater	-	82.6 mm (3.25 in.)	53.5 mm (2.11 in.)	
			for Cold Area	78.3 mm (3.08 in.)	52.7 mm (2.07 in.)	
		5 - Seater	-	83.9 mm (3.30 in.)	58.0 mm (2.28 in.)	
			for Cold Area	79.7 mm (3.14 in.)	57.3 mm (2.26 in.)	
7 - Seater		-	84.2 mm (3.31 in.)	60.1 mm (2.37 in.)		
		for Cold Area	84.2 mm (3.31 in.)	60.1 mm (2.37 in.)		

			for Cold Area	80.0 mm (3.15 in.)	59.4 mm (2.34 in.)	
VX	5 - Seater	-		80.7 mm (3.18 in.)	57.6 mm (2.27 in.)	
		for Cold Area		81.9 mm (3.22 in.)	58.0 mm (2.28 in.)	
	7 - Seater	-		81.8 mm (3.22 in.) (*1)	58.6 mm (2.31 in.) (*1)	
		for Cold Area		81.7 mm (3.22 in.) (*2)	58.5 mm (2.30 in.) (*2)	
VXL	5 - Seater	-		80.2 mm (3.16 in.)	66.4 mm (2.61 in.) (*1)	
		for Cold Area		81.3 mm (3.20 in.)	66.3 mm (2.61 in.) (*2)	
	7 - Seater	-		81.3 mm (3.20 in.)	66.4 mm (2.61 in.)	
		for Cold Area		82.4 mm (3.24 in.)	66.8 mm (2.63 in.)	
GRJ150L-GKAEKW	TX	2 - Seater	-	79.4 mm (3.13 in.)	51.0 mm (2.01 in.)	
		5 - Seater	-	78.4 mm (3.09 in.)	54.5 mm (2.15 in.)	
		7 - Seater	-	90.2 mm (3.55 in.) (*1) 79.5 mm (3.13 in.) (*2)	57.9 mm (2.28 in.) (*1) 55.6 mm (2.19 in.) (*2)	
	TXL	2 - Seater	-	79.6 mm (3.13 in.)	52.1 mm (2.05 in.)	
		5 - Seater	-	79.8 mm (3.14 in.) (*1) 90.6 mm (3.57 in.) (*2)	56.3 mm (2.22 in.) (*1) 58.7 mm (2.31 in.) (*2)	
		7 - Seater	-	91.7 mm (3.61 in.)	59.7 mm (2.35 in.)	
	VX	5 - Seater	-	90.0 mm (3.54 in.)	59.3 mm (2.33 in.) (*1) 59.2 mm (2.33 in.) (*2)	
		7 - Seater	-	91.1 mm (3.59 in.)	60.3 mm (2.37 in.)	
	VXL	5 - Seater	-	89.2 mm (3.51 in.)	68.0 mm (2.68 in.)	
		7 - Seater	-	90.4 mm (3.56 in.) (*1) 90.3 mm (3.56 in.) (*2)	68.1 mm (2.68 in.)	
	GRJ150R-GKAEKW	TX	2 - Seater	-	88.9 mm (3.50 in.)	52.5 mm (2.07 in.)
			5 - Seater	-	89.1 mm (3.51 in.)	56.7 mm (2.23 in.)
7 - Seater			-	79.5 mm (3.13 in.) (*1) 90.2 mm (3.55 in.) (*2)	55.6 mm (2.19 in.) (*1) 57.9 mm (2.28 in.) (*2)	
TXL		2 - Seater	-	90.3 mm (3.56 in.)	54.6 mm (2.15 in.) (*1) 54.7 mm (2.15 in.) (*2)	
		5 - Seater	-	90.5 mm (3.56 in.)	58.9 mm (2.32 in.)	
		7 - Seater	-	80.9 mm (3.19 in.) (*1) 91.6 mm (3.61 in.) (*2)	57.7 mm (2.27 in.) (*1) 60.0 mm (2.36 in.) (*2)	
VX		5 - Seater	-	86.9 mm (3.42 in.) (*1) 76.2 mm (3.00 in.) (*2)	58.9 mm (2.32 in.) (*1) 56.5 mm (2.22 in.) (*2)	
		7 - Seater	-	77.3 mm (3.04 in.)	57.6 mm (2.27 in.)	
VXL		5 - Seater	-	86.1 mm (3.39 in.) (*1) 75.4 mm (2.97 in.) (*2)	67.4 mm (2.65 in.) (*1) 65.1 mm (2.56 in.) (*2)	
		7 - Seater	-	76.6 mm (3.02 in.)	65.2 mm (2.57 in.)	
					90.8 mm (3.57 in.) (*1) 82.0 mm (3.23 in.)	69.4 mm (2.73 in.) (*1) 58.8 mm (2.31 in.)



KDJ155L-GJAEYW	TX	2 - Seater		in.) (*2)	in.) (*2)
			for Cold Area	89.2 mm (3.51 in.) (*1) 78.8 mm (3.10 in.) (*2)	69.2 mm (2.72 in.) (*1) 58.2 mm (2.29 in.) (*2)
		5 - Seater	-	92.8 mm (3.65 in.) (*1) 84.0 mm (3.31 in.) (*2)	73.4 mm (2.89 in.) (*1) 62.8 mm (2.47 in.) (*2)
			for Cold Area	91.1 mm (3.59 in.) (*1) 80.8 mm (3.18 in.) (*2)	73.2 mm (2.88 in.) (*1) 62.2 mm (2.45 in.) (*2)
	Spare Tire Less		92.5 mm (3.64 in.)	70.2 mm (2.76 in.)	
	Spare Tire Less for Cold Area		90.9 mm (3.58 in.)	69.9 mm (2.75 in.)	
	TXL	2 - Seater	-	91.4 mm (3.60 in.) (*1) 82.6 mm (3.25 in.) (*2)	70.4 mm (2.77 in.) (*1) 59.8 mm (2.35 in.) (*2)
			for Cold Area	89.7 mm (3.53 in.) (*1) 79.4 mm (3.13 in.) (*2)	70.1 mm (2.76 in.) (*1) 59.2 mm (2.33 in.) (*2)
		5 - Seater	-	93.7 mm (3.69 in.) (*1) 84.9 mm (3.34 in.) (*2)	74.5 mm (2.93 in.) (*1) 63.9 mm (2.52 in.) (*2)
			for Cold Area	92.1 mm (3.63 in.) (*1) 81.7 mm (3.22 in.) (*2)	74.3 mm (2.93 in.) (*1) 63.3 mm (2.49 in.) (*2)
			Spare Tire Less	93.5 mm (3.68 in.)	71.2 mm (2.80 in.)
			Spare Tire Less for Cold Area	91.8 mm (3.61 in.)	71.0 mm (2.80 in.)
VX		5 - Seater	-	96.5 mm (3.80 in.) (*1) 87.7 mm (3.45 in.) (*2)	78.3 mm (3.08 in.) (*1) 67.6 mm (2.66 in.) (*2)
			for Cold Area	94.8 mm (3.73 in.) (*1) 84.4 mm (3.32 in.) (*2)	78.0 mm (3.07 in.) (*1) 66.9 mm (2.63 in.) (*2)
	Spare Tire Less		96.3 mm (3.79 in.)	75.0 mm (2.95 in.)	
	Spare Tire Less for Cold Area		94.5 mm (3.72 in.)	74.7 mm (2.94 in.)	
KDJ155L-GJFEYW	TX	2 - Seater	-	89.5 mm (3.52 in.) (*1) 80.6 mm (3.17 in.) (*2)	68.7 mm (2.70 in.) (*1) 58.2 mm (2.29 in.) (*2)
			for Cold Area	94.4 mm (3.72 in.) (*1) 85.6 mm (3.37 in.) (*2)	70.1 mm (2.76 in.) (*1) 59.5 mm (2.34 in.) (*2)
		5 - Seater	-	91.4 mm (3.60 in.) (*1) 82.6 mm (3.25 in.) (*2)	73.0 mm (2.87 in.) (*1) 62.4 mm (2.46 in.) (*2)
			for Cold Area	96.4 mm (3.80 in.) (*1) 87.6 mm (3.45 in.) (*2)	74.4 mm (2.93 in.) (*1) 63.8 mm (2.51 in.) (*2)
			Spare Tire Less	91.1 mm (3.59 in.)	69.7 mm (2.74 in.)
			Spare Tire Less for Cold Area	96.2 mm (3.79 in.)	71.2 mm (2.80 in.)
	TXL	2 - Seater	-	90.7 mm (3.57 in.) (*1) 81.9 mm (3.22 in.) (*2)	70.2 mm (2.76 in.) (*1) 59.6 mm (2.35 in.) (*2)
			for Cold Area	89.0 mm (3.50 in.) (*1) 78.7 mm (3.10 in.) (*2)	69.9 mm (2.75 in.) (*1) 59.0 mm (2.32 in.) (*2)
		5 - Seater	-	92.7 mm (3.65 in.) (*1) 83.8 mm (3.30 in.) (*2)	74.5 mm (2.93 in.) (*1) 63.8 mm (2.51 in.) (*2)
			for Cold Area	91.0 mm (3.58 in.) (*1) 80.7 mm (3.18 in.)	74.2 mm (2.92 in.) (*1) 63.2 mm (2.49 in.)

				in.) (*2)	in.) (*2)	
	VX	5 - Seater	Spare Tire Less	92.4 mm (3.64 in.)	71.2 mm (2.80 in.)	
			Spare Tire Less for Cold Area	90.7 mm (3.57 in.)	70.9 mm (2.79 in.)	
			-	95.2 mm (3.75 in.) (*1) 86.4 mm (3.40 in.) (*2)	77.0 mm (3.03 in.) (*1) 66.4 mm (2.61 in.) (*2)	
			for Cold Area	93.5 mm (3.68 in.) (*1) 83.1 mm (3.27 in.) (*2)	76.8 mm (3.02 in.) (*1) 65.7 mm (2.59 in.) (*2)	
			Spare Tire Less	94.9 mm (3.74 in.)	73.8 mm (2.91 in.)	
			Spare Tire Less for Cold Area	93.2 mm (3.67 in.)	73.5 mm (2.89 in.)	
	KDJ155R-GJAEYW	TX	2 - Seater	-	95.4 mm (3.76 in.) (*1) 85.5 mm (3.37 in.) (*2)	70.5 mm (2.76 in.) (*1) 59.7 mm (2.35 in.) (*2)
				for Cold Area	93.8 mm (3.69 in.)	70.3 mm (2.77 in.)
			5 - Seater	-	97.0 mm (3.82 in.) (*1) 87.1 mm (3.43 in.) (*2)	74.5 mm (2.93 in.) (*1) 63.5 mm (2.50 in.) (*2)
				for Cold Area	95.4 mm (3.76 in.)	74.2 mm (2.92 in.)
				Spare Tire Less	97.1 mm (3.82 in.)	71.2 mm (2.80 in.)
				Spare Tire Less for Cold Area	95.5 mm (3.76 in.)	71.0 mm (2.80 in.)
TXL		2 - Seater	-	96.7 mm (3.81 in.) (*1) 86.8 mm (3.42 in.) (*2)	71.9 mm (2.83 in.) (*1) 61.1 mm (2.41 in.) (*2)	
			for Cold Area	94.3 mm (3.71 in.)	71.5 mm (2.81 in.)	
		5 - Seater	-	98.3 mm (3.87 in.) (*1) 88.4 mm (3.48 in.) (*2)	75.8 mm (2.98 in.) (*1) 64.9 mm (2.56 in.) (*2)	
			for Cold Area	96.6 mm (3.80 in.)	75.6 mm (2.98 in.)	
			Spare Tire Less	98.0 mm (3.86 in.)	72.5 mm (2.85 in.)	
			Spare Tire Less for Cold Area	96.4 mm (3.80 in.)	72.3 mm (2.85 in.)	
VX	5 - Seater	-	92.0 mm (3.62 in.) (*1) 84.3 mm (3.32 in.) (*2)	76.9 mm (3.03 in.) (*1) 66.4 mm (2.61 in.) (*2)		
		for Cold Area	90.2 mm (3.55 in.)	76.7 mm (3.02 in.)		
		Spare Tire Less	91.7 mm (3.61 in.)	73.6 mm (2.90 in.)		
		Spare Tire Less for Cold Area	89.9 mm (3.54 in.)	73.4 mm (2.89 in.)		
KDJ155R-GJFEYW	TX	2 - Seater	-	94.0 mm (3.70 in.) (*1) 84.1 mm (3.31 in.) (*2)	70.1 mm (2.76 in.) (*1) 59.3 mm (2.33 in.) (*2)	
			for Cold Area	92.4 mm (3.64 in.)	69.9 mm (2.75 in.)	
		5 - Seater	-	96.0 mm (3.78 in.) (*1) 86.1 mm (3.39 in.) (*2)	74.1 mm (2.92 in.) (*1) 63.3 mm (2.49 in.) (*2)	
			for Cold Area	94.4 mm (3.72 in.)	74.0 mm (2.91 in.)	
			Spare Tire Less	95.7 mm (3.77 in.)	70.8 mm (2.79 in.)	
			Spare Tire Less for Cold Area	94.1 mm (3.70 in.)	70.6 mm (2.78 in.)	
	2 - Seater	-	95.3 mm (3.75 in.) (*1) 85.4 mm (3.36 in.) (*2)	71.5 mm (2.81 in.) (*1) 60.7 mm (2.39 in.) (*2)		
		for Cold Area	93.6 mm (3.69 in.)	71.3 mm (2.81 in.)		
					97.2 mm (3.83 in.)	75.5 mm (2.97 in.)

	TXL	5 - Seater	-	in.) (*1) 87.3 mm (3.44 in.) (*2)	in.) (*1) 64.7 mm (2.55 in.) (*2)	
			for Cold Area	95.6 mm (3.76 in.)	75.3 mm (2.96 in.)	
			Spare Tire Less	96.6 mm (3.80 in.)	72.2 mm (2.84 in.)	
			Spare Tire Less for Cold Area	95.0 mm (3.74 in.)	72.0 mm (2.83 in.)	
	VX	5 - Seater	-	90.6 mm (3.57 in.) (*1) 82.9 mm (3.26 in.) (*2)	75.9 mm (2.99 in.) (*1) 65.5 mm (2.58 in.) (*2)	
			for Cold Area	98.1 mm (3.86 in.)	77.9 mm (3.07 in.)	
			Spare Tire Less	90.3 mm (3.56 in.)	72.6 mm (2.86 in.)	
			Spare Tire Less for Cold Area	97.8 mm (3.85 in.)	74.6 mm (2.94 in.)	
	KDJ150R- GKAEYQ	TX	5 - Seater	-	72.6 mm (2.86 in.)	53.5 mm (2.11 in.)
				for Double Tank Type	71.6 mm (2.82 in.)	55.7 mm (2.19 in.)
			7 - Seater	-	73.6 mm (2.90 in.)	54.7 mm (2.15 in.)
				for Double Tank Type	72.7 mm (2.86 in.)	56.7 mm (2.23 in.)
TXL		7 - Seater	-	74.5 mm (2.93 in.)	58.7 mm (2.31 in.)	
			for Double Tank Type	73.5 mm (2.89 in.)	60.5 mm (2.38 in.)	
VX		7 - Seater	-	83.3 mm (3.28 in.)	61.1 mm (2.41 in.)	
			for Double Tank Type	82.5 mm (3.25 in.)	61.8 mm (2.43 in.)	
VXL		7 - Seater	-	80.8 mm (3.18 in.)	66.3 mm (2.61 in.)	
			for Double Tank Type	83.6 mm (3.29 in.)	66.6 mm (2.62 in.)	
KDJ150R- GKFEYQ		TX	5 - Seater	-	77.6 mm (3.06 in.)	54.6 mm (2.15 in.)
				for Double Tank Type	76.6 mm (3.02 in.)	56.8 mm (2.24 in.)
	7 - Seater		-	72.7 mm (2.86 in.)	54.4 mm (2.14 in.)	
			for Double Tank Type	71.8 mm (2.83 in.)	56.5 mm (2.22 in.)	
	TXL	7 - Seater	-	79.5 mm (3.13 in.)	59.5 mm (2.34 in.)	
			for Double Tank Type	78.5 mm (3.09 in.)	61.2 mm (2.41 in.)	
	VX	7 - Seater	-	82.2 mm (3.24 in.)	60.5 mm (2.38 in.)	
			for Double Tank Type	81.4 mm (3.20 in.)	61.3 mm (2.41 in.)	
	VXL	7 - Seater	-	82.8 mm (3.26 in.)	66.7 mm (2.63 in.)	
			for Double Tank Type	82.1 mm (3.23 in.)	66.2 mm (2.61 in.)	
	GRJ150R- GKAEKQ	TX	5 - Seater	-	73.0 mm (2.87 in.)	52.8 mm (2.08 in.)
				for Double Tank Type	72.1 mm (2.84 in.)	54.5 mm (2.15 in.)
7 - Seater			-	74.1 mm (2.92 in.)	54.0 mm (2.13 in.)	
			for Double Tank Type	73.2 mm (2.88 in.)	55.6 mm (2.19 in.)	
TXL		7 - Seater	-	75.0 mm (2.95 in.)	58.0 mm (2.28 in.)	
			for Double Tank Type	74.1 mm (2.92 in.)	59.3 mm (2.33 in.)	
VX		7 - Seater	-	77.7 mm (3.06 in.)	59.1 mm (2.33 in.)	
			for Double Tank Type	77.0 mm (3.03 in.)	59.5 mm (2.34 in.)	
VXL		7 - Seater	-	78.4 mm (3.09 in.)	65.5 mm (2.58 in.)	
			for Double Tank Type	77.7 mm (3.06 in.)	65.1 mm (2.56 in.)	

GRJ150R- GKFEKQ	TX	5 - Seater	-	72.0 mm (2.83 in.)	52.5 mm (2.07 in.)	
			for Double Tank Type	71.1 mm (2.80 in.)	54.2 mm (2.13 in.)	
		7 - Seater	-	73.2 mm (2.88 in.)	53.8 mm (2.12 in.)	
			for Double Tank Type	72.3 mm (2.85 in.)	55.4 mm (2.18 in.)	
	TXL	7 - Seater	-	74.1 mm (2.92 in.)	57.5 mm (2.26 in.)	
			for Double Tank Type	73.2 mm (2.88 in.)	58.9 mm (2.32 in.)	
	VX	7 - Seater	-	76.5 mm (3.01 in.)	58.6 mm (2.31 in.)	
			for Double Tank Type	75.7 mm (2.98 in.)	58.9 mm (2.32 in.)	
	VXL	7 - Seater	-	77.1 mm (3.04 in.)	65.2 mm (2.57 in.)	
			for Double Tank Type	75.8 mm (2.98 in.)	64.6 mm (2.54 in.)	
	KDJ155R- GJAEYW	TX	5 - Seater	-	73.1 mm (2.88 in.)	60.1 mm (2.37 in.)
		TXL	5 - Seater	-	74.1 mm (2.92 in.)	61.5 mm (2.42 in.)
VX		5 - Seater	-	76.9 mm (3.03 in.)	64.9 mm (2.56 in.)	
KDJ150L- GKAEYV	TX	5 - Seater	-	76.2 mm (3.00 in.)	54.6 mm (2.15 in.)	
			for Double Tank Type	75.3 mm (2.96 in.)	56.8 mm (2.24 in.)	
		7 - Seater	-	77.3 mm (3.04 in.)	55.7 mm (2.19 in.)	
			for Double Tank Type	76.3 mm (3.00 in.)	57.7 mm (2.27 in.)	
		9 - Seater	-	76.2 mm (3.00 in.)	54.0 mm (2.13 in.)	
			for Double Tank Type	75.3 mm (2.96 in.)	56.1 mm (2.21 in.)	
	TXL	5 - Seater	-	76.0 mm (2.99 in.)	56.9 mm (2.24 in.)	
			for Double Tank Type	75.1 mm (2.96 in.)	59.0 mm (2.32 in.)	
		7 - Seater	-	78.9 mm (3.11 in.)	58.4 mm (2.30 in.)	
			for Double Tank Type	78.0 mm (3.07 in.)	60.3 mm (2.37 in.)	
		9 - Seater	-	76.0 mm (2.99 in.)	55.8 mm (2.20 in.)	
			for Double Tank Type	75.1 mm (2.96 in.)	57.5 mm (2.26 in.)	
	VX	7 - Seater	-	83.4 mm (3.28 in.)	60.2 mm (2.37 in.)	
			for Double Tank Type	82.6 mm (3.25 in.)	61.0 mm (2.40 in.)	
	VXL	7 - Seater	-	83.1 mm (3.27 in.)	66.8 mm (2.63 in.)	
			for Double Tank Type	82.4 mm (3.24 in.)	66.3 mm (2.61 in.)	
	KDJ150L- GKFEYV	TX	5 - Seater	-	75.0 mm (2.95 in.)	54.3 mm (2.14 in.)
				for Double Tank Type	74.0 mm (2.91 in.)	56.4 mm (2.22 in.)
7 - Seater			-	76.0 mm (2.99 in.)	56.0 mm (2.20 in.)	
			for Double Tank Type	75.1 mm (2.96 in.)	57.9 mm (2.28 in.)	
9 - Seater			-	75.0 mm (2.95 in.)	53.7 mm (2.11 in.)	
			for Double Tank Type	74.0 mm (2.91 in.)	55.7 mm (2.19 in.)	
TXL		5 - Seater	-	76.6 mm (3.02 in.)	56.8 mm (2.24 in.)	
			for Double Tank Type	75.7 mm (2.98 in.)	58.8 mm (2.31 in.)	
		7 - Seater	-	77.7 mm (3.06 in.)	57.9 mm (2.28 in.)	
			for Double Tank Type	76.8 mm (3.02 in.)	59.7 mm (2.35 in.)	
					76.6 mm (3.02 in.)	56.1 mm (2.21 in.)

		9 - Seater	-	in.)	in.)	
			for Double Tank Type	75.7 mm (2.98 in.)	58.1 mm (2.29 in.)	
	VX	7 - Seater	-	82.3 mm (3.24 in.)	59.2 mm (2.33 in.)	
			for Double Tank Type	81.5 mm (3.21 in.)	60.0 mm (2.36 in.)	
	VXL	7 - Seater	-	81.9 mm (3.22 in.)	66.5 mm (2.62 in.)	
			for Double Tank Type	81.2 mm (3.20 in.)	66.1 mm (2.60 in.)	
GRJ150L-GKAEKV	TX	5 - Seater	-	73.6 mm (2.90 in.)	53.2 mm (2.09 in.)	
			for Double Tank Type	72.7 mm (2.86 in.)	54.9 mm (2.16 in.)	
		7 - Seater	-	74.7 mm (2.94 in.)	54.4 mm (2.14 in.)	
			for Double Tank Type	73.8 mm (2.91 in.)	55.9 mm (2.20 in.)	
		9 - Seater	-	73.6 mm (2.90 in.)	52.7 mm (2.07 in.)	
			for Double Tank Type	72.7 mm (2.86 in.)	54.3 mm (2.14 in.)	
	TXL	5 - Seater	-	75.3 mm (2.96 in.)	56.0 mm (2.20 in.)	
			for Double Tank Type	74.4 mm (2.93 in.)	57.6 mm (2.27 in.)	
		7 - Seater	-	76.4 mm (3.01 in.)	57.0 mm (2.24 in.)	
			for Double Tank Type	75.5 mm (2.97 in.)	58.5 mm (2.30 in.)	
		9 - Seater	-	75.3 mm (2.96 in.)	55.3 mm (2.18 in.)	
			for Double Tank Type	74.4 mm (2.93 in.)	56.8 mm (2.24 in.)	
	VX	7 - Seater	-	80.9 mm (3.19 in.)	58.6 mm (2.31 in.)	
				for Double Tank Type	80.1 mm (3.15 in.)	59.0 mm (2.32 in.)
	VXL	7 - Seater	-	80.5 mm (3.17 in.)	65.9 mm (2.59 in.)	
				for Double Tank Type	79.8 mm (3.14 in.)	65.6 mm (2.58 in.)
	GRJ150L-GKFEKV	TX	5 - Seater	-	72.3 mm (2.85 in.)	52.9 mm (2.08 in.)
				for Double Tank Type	71.4 mm (2.81 in.)	54.6 mm (2.15 in.)
			7 - Seater	-	73.5 mm (2.89 in.)	54.1 mm (2.13 in.)
				for Double Tank Type	72.6 mm (2.86 in.)	55.7 mm (2.19 in.)
			9 - Seater	-	72.3 mm (2.85 in.)	52.3 mm (2.06 in.)
				for Double Tank Type	71.4 mm (2.81 in.)	53.9 mm (2.12 in.)
		TXL	5 - Seater	-	74.1 mm (2.92 in.)	55.4 mm (2.18 in.)
				for Double Tank Type	73.1 mm (2.88 in.)	57.0 mm (2.24 in.)
7 - Seater			-	75.2 mm (2.96 in.)	56.5 mm (2.22 in.)	
			for Double Tank Type	74.3 mm (2.93 in.)	58.0 mm (2.28 in.)	
9 - Seater			-	74.1 mm (2.92 in.)	54.2 mm (2.13 in.)	
			for Double Tank Type	73.2 mm (2.88 in.)	55.8 mm (2.20 in.)	
VX		7 - Seater	-	79.7 mm (3.14 in.)	57.9 mm (2.28 in.)	
				for Double Tank Type	78.9 mm (3.11 in.)	58.2 mm (2.29 in.)
VXL		7 - Seater	-	79.3 mm (3.12 in.)	65.7 mm (2.59 in.)	
				for Double Tank Type	78.6 mm (3.09 in.)	65.2 mm (2.57 in.)
			5 - Seater	-	75.5 mm (2.97 in.)	54.2 mm (2.13 in.)
			7 - Seater	-	76.6 mm (3.02 in.)	55.4 mm (2.18 in.)

TRJ150L-GKPEKV	TXL	9 - Seater	-	75.5 mm (2.97 in.)	53.6 mm (2.11 in.)
		5 - Seater	-	76.4 mm (3.01 in.)	55.3 mm (2.18 in.)
		7 - Seater	-	77.6 mm (3.06 in.)	56.3 mm (2.22 in.)
		9 - Seater	-	76.4 mm (3.01 in.)	54.6 mm (2.15 in.)
TRJ150L-GKMEKV	TX	5 - Seater	-	74.2 mm (2.92 in.)	53.6 mm (2.11 in.)
		7 - Seater	-	75.3 mm (2.96 in.)	54.8 mm (2.16 in.)
		9 - Seater	-	74.2 mm (2.92 in.)	53.0 mm (2.09 in.)
	TXL	5 - Seater	-	75.1 mm (2.96 in.)	54.6 mm (2.15 in.)
		7 - Seater	-	76.3 mm (3.00 in.)	55.8 mm (2.20 in.)
		9 - Seater	-	75.1 mm (2.96 in.)	54.0 mm (2.13 in.)
TRJ155L-GKPEKV	TX	5 - Seater	-	74.2 mm (2.92 in.)	59.7 mm (2.35 in.)
	TXL	5 - Seater	-	74.6 mm (2.94 in.)	59.8 mm (2.35 in.)

**Measuring points:**

- A:**  
Ground clearance of the center of the front wheel
- B:**  
Ground clearance of the center of the front adjusting cam bolt
- C:**  
Ground clearance of the center of the rear wheel
- D:**  
Ground clearance of the center of the rear lower control arm front side

If the vehicle height is not as specified, adjust the height by pressing down on the vehicle several times to stabilize the suspension.

- (\*1) Light duty
- (\*2) Hard duty

**NOTICE:**

The standard value shown here is a value that is used for adjusting the wheel alignment and does not indicate the height of an actual vehicle.


**4. INSPECT CAMBER, CASTER AND STEERING AXIS INCLINATION**

- a. Install a camber-caster-kingpin gauge or place the front wheels on the center of a wheel alignment tester.

**Text in Illustration**

*1	Wheel Alignment Tester
*2	Gauge

- b. Inspect the camber, caster and steering axis inclination.

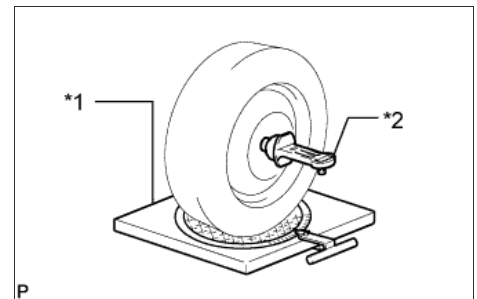

**Standard Camber Inclination (Unloaded Vehicle):**

Vehicle Model	Grade	Seating Capacity	Item	Camber Inclination	Right-left Difference		
	TX	5 - Seater	-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less		
		7 - Seater	-	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°24' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less		
		9 - Seater	-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less		
				5 - Seater	-	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less

KDJ150L-GKAEY	TXL	7 - Seater	-	for Double Tank Type	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less	
			-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less		
		9 - Seater	-	for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less	
			-	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less		
		VX	5 - Seater	-	for Double Tank Type	0°16' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less
				-	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
	7 - Seater		-	for Double Tank Type	0°15' +/-45' (0.25° +/-0.75°)	45' (0.75°) or less	
			-	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less		
	VXL	7 - Seater	-	for Double Tank Type	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
			-	0°17' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less		
	KDJ150L-GKFEY	TX	5 - Seater	-	for Double Tank Type	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
				-	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less	
7 - Seater			-	for Double Tank Type	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less	
			-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less		
9 - Seater			-	for Double Tank Type	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less	
			-	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less		
TXL			5 - Seater	-	for Double Tank Type	0°25' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less
				-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less	
			7 - Seater	-	for Double Tank Type	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less
				-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less	
			9 - Seater	-	for Double Tank Type	0°25' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less
				-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less	
VX		5 - Seater	-	for Double Tank Type	0°18' +/-45' (0.30° +/-0.75°)	45' (0.75°) or less	
			-	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less		
		7 - Seater	-	for Double Tank Type	0°16' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less	
			-	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less		
		VXL	7 - Seater	-	for Double Tank Type	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less
				-	0°18' +/-45' (0.30° +/-0.75°)	45' (0.75°) or less	
KDJ150R-GKAEY		TX	5 - Seater	-	for Double Tank Type	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less
				-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less	
			7 - Seater	-	for Double Tank Type	0°22' +/-45' (0.36° +/-0.75°)	45' (0.75°) or less
				-	0°23' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less	
			9 - Seater	-	for Double Tank Type	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less
				-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less	
	TXL		5 - Seater	-	for Double Tank Type	0°22' +/-45' (0.36° +/-0.75°)	45' (0.75°) or less
				-	0°23' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less	
			7 - Seater	-	for Double Tank Type	0°20' +/-45' (0.34° +/-0.75°)	45' (0.75°) or less
				-	0°21' +/-45' (0.35° +/-0.75°)	45' (0.75°) or less	
			-	0°22' +/-45'	45' (0.75°)		

	VX	9 - Seater	-	(0.36° +/-0.75°)	or less	
			for Double Tank Type	0°23' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less	
		VXL	5 - Seater	-	0°16' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less
			7 - Seater	-	0°15' +/-45' (0.25° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less
	KDJ150R-GKFEY	TX	5 - Seater	-	0°23' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less
			7 - Seater	-	0°21' +/-45' (0.35° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°22' +/-45' (0.36° +/-0.75°)	45' (0.75°) or less
		TXL	5 - Seater	-	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
GRJ150L-GKAEK	VX	7 - Seater	-	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less	
		5 - Seater	-	0°16' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less	
	VXL	7 - Seater	-	0°15' +/-45' (0.25° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
	TX	5 - Seater	-	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°17' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less	
		TXL	7 - Seater	-	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°17' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less
			5 - Seater	-	0°28' +/-45' (0.46° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°29' +/-45' (0.47° +/-0.75°)	45' (0.75°) or less
	7 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less		
		for Double Tank Type	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less		
	GRJ150L-GKAEK	TXL	9 - Seater	-	0°28' +/-45' (0.46° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°29' +/-45' (0.47° +/-0.75°)	45' (0.75°) or less
			5 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
7 - Seater		-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less		
		for Double Tank Type	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less		
VX	9 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less		
		for Double Tank Type	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less		
VX	TXL	5 - Seater	-	0°19' +/-45' (0.32° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°20' +/-45' (0.34° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	0°18' +/-45' (0.30° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less	
	VXL	7 - Seater	-	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°20' +/-45'	45' (0.75°)	



			Type	(0.32° +/-0.75°)	or less
GRJ150L-GKFEK	TX	5 - Seater	-	0°29' +/-45' (0.47° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°29' +/-45' (0.48° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°28' +/-45' (0.46° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°29' +/-45' (0.47° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°29' +/-45' (0.48° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°28' +/-45' (0.46° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°26' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°28' +/-45' (0.46° +/-0.75°)	45' (0.75°) or less
VX	5 - Seater	-	0°17' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
	7 - Seater	-	0°15' +/-45' (0.25° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
	VXL	7 - Seater	-	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°17' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less
LJ150L-GKMEE	TX	5 - Seater	-	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°28' +/-45' (0.46° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°26' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°28' +/-45' (0.46° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°25' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less
LJ150R-GKMEE	TX	5 - Seater	-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less
	5 - Seater	-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less	
		-	0°23' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less	
		-			

	TXL	7 - Seater	-	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less		
		9 - Seater	-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less		
TRJ150L-GKPEK	TX	5 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less		
		7 - Seater	-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less		
		9 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less		
	TXL	5 - Seater	-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°26' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less		
		7 - Seater	-	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°24' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less		
		9 - Seater	-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°26' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less		
TRJ150L-GKMEK	TX	5 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less		
		7 - Seater	-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less		
		TXL	5 - Seater	-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less	
				for Double Tank Type	0°26' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less	
	7 - Seater		-	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°24' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less		
	TRJ150R-GKMEK		TX	5 - Seater	-	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
					for Double Tank Type	0°28' +/-45' (0.46° +/-0.75°)	45' (0.75°) or less
		7 - Seater		-	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less	
				for Double Tank Type	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less	
TXL		5 - Seater		-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less	
				for Double Tank Type	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less		
			for Double Tank Type	0°26' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less		
			TX	2 - Seater	-	0°21' +/-45' (0.34° +/-0.75°)	45' (0.75°) or less
					for Cold Area	0°18' +/-45' (0.30° +/-0.75°)	45' (0.75°) or less
5 - Seater				-	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less	
				for Cold Area	0°16' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less	
	Spare Tire Less			0°21' +/-45' (0.34° +/-0.75°)	45' (0.75°) or less		
	-			0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less		
7 - Seater	-			0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less		
	for Cold Area			0°15' +/-45' (0.25° +/-0.75°)	45' (0.75°) or less		
TXL	2 - Seater			-	0°19' +/-45' (0.32° +/-0.75°)	45' (0.75°) or less	
				for Cold Area	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
	5 - Seater			-	0°18' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
				for Cold Area	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	

KDJ150L-GKAEYW	VX	7 - Seater	-	for Cold Area	0°16' +/-45' (0.25° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°17' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less	
		5 - Seater	-	for Cold Area	0°14' +/-45' (0.23° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°18' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	for Cold Area	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°16' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less	
	VXL	5 - Seater	-	for Cold Area	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°18' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	for Cold Area	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°16' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less	
		5 - Seater	-	for Cold Area	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°18' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
KDJ150L-GKFEYW	TX	2 - Seater	-	for Cold Area	0°22' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°20' +/-45' (0.33° +/-0.75°)	45' (0.75°) or less	
		5 - Seater	-	for Cold Area	0°20' +/-45' (0.33° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°18' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
			-	Spare Tire Less	0°21' +/-45' (0.35° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	for Cold Area	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°16' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less	
		TXL	2 - Seater	-	for Cold Area	0°21' +/-45' (0.34° +/-0.75°)	45' (0.75°) or less
				-	for Cold Area	0°18' +/-45' (0.30° +/-0.75°)	45' (0.75°) or less
			5 - Seater	-	for Cold Area	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less
				-	for Cold Area	0°16' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less
			7 - Seater	-	for Cold Area	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less
	-			for Cold Area	0°15' +/-45' (0.24° +/-0.75°)	45' (0.75°) or less	
	VX	5 - Seater	-	for Cold Area	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°19' +/-45' (0.30° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	for Cold Area	0°18' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less	
		5 - Seater	-	for Cold Area	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°18' +/-45' (0.30° +/-0.75°)	45' (0.75°) or less	
	VXL	5 - Seater	-	for Cold Area	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	for Cold Area	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less	
			-	for Cold Area	0°15' +/-45' (0.24° +/-0.75°)	45' (0.75°) or less	
		TX	2 - Seater	-	for Cold Area	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less
-				for Cold Area	0°22' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less	
5 - Seater	-		for Cold Area	0°15' +/-45' (0.25° +/-0.75°)	45' (0.75°) or less		
	-		for Cold Area	0°20' +/-45' (0.34° +/-0.75°)	45' (0.75°) or less		
	-		Spare Tire Less	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less		
7 - Seater	-		for Cold Area	0°14' +/-45' (0.23° +/-0.75°)	45' (0.75°) or less		
	-	for Cold Area	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less			
					0°15' +/-45'	45' (0.75°)	

KDJ150R-GKAEYW	TXL	2 - Seater	-	(0.26° +/-0.75°)	or less
			for Cold Area	0°21' +/-45' (0.35° +/-0.75°)	45' (0.75°) or less
		5 - Seater	-	0°14' +/-45' (0.23° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°12' +/-45' (0.20° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less
	VX	5 - Seater	-	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°15' +/-45' (0.24° +/-0.75°)	45' (0.75°) or less
	VXL	5 - Seater	-	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less
7 - Seater		-	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
		for Cold Area	0°15' +/-45' (0.24° +/-0.75°)	45' (0.75°) or less	
KDJ150R-GKFEYW	TX	2 - Seater	-	0°18' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°23' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less
		5 - Seater	-	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°22' +/-45' (0.36° +/-0.75°)	45' (0.75°) or less
			Spare Tire Less	0°18' +/-45' (0.30° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°15' +/-45' (0.25° +/-0.75°)	45' (0.75°) or less
	for Cold Area		0°20' +/-45' (0.34° +/-0.75°)	45' (0.75°) or less	
	TXL	2 - Seater	-	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°22' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less
		5 - Seater	-	0°15' +/-45' (0.24° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°20' +/-45' (0.33° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°14' +/-45' (0.23° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°19' +/-45' (0.32° +/-0.75°)	45' (0.75°) or less
	VX	5 - Seater	-	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°18' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less
			for Cold Area	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less
	VXL	5 - Seater	-	0°19' +/-45' (0.30° +/-0.75°)	45' (0.75°) or less
for Cold Area			0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less	
7 - Seater		-	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less	
		for Cold Area	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
TX	2 - Seater	-	0°21' +/-45' (0.35° +/-0.75°)	45' (0.75°) or less	
		for Cold Area	0°22' +/-45' (0.36° +/-0.75°)	45' (0.75°) or less	
	5 - Seater	-	0°22' +/-45' (0.36° +/-0.75°)	45' (0.75°) or less	
		for Cold Area	0°7' +/-45' (0.11° +/-0.75°) (*1) 0°20' +/-45' (0.33° +/-0.75°) (*2)	45' (0.75°) or less	
7 - Seater	-	0°21' +/-45'	45' (0.75°)		
	for Cold Area	0°21' +/-45'	45' (0.75°)		

GRJ150L-GKAEKW	TXL	2 - Seater	-	(0.34° +/-0.75°)	or less	
		5 - Seater	-	0°20' +/-45' (0.33° +/-0.75°) (*1) 0°6' +/-45' (0.10° +/-0.75°) (*2)	45' (0.75°) or less	
		7 - Seater	-	0°5' +/-45' (0.07° +/-0.75°)	45' (0.75°) or less	
	VX	5 - Seater	-	0°7' +/-45' (0.11° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	0°5' +/-45' (0.08° +/-0.75°)	45' (0.75°) or less	
	VXL	5 - Seater	-	0°7' +/-45' (0.11° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	0°5' +/-45' (0.08° +/-0.75°)	45' (0.75°) or less	
	GRJ150R-GKAEKW	TX	2 - Seater	-	0°9' +/-45' (0.15° +/-0.75°)	45' (0.75°) or less
			5 - Seater	-	0°8' +/-45' (0.13° +/-0.75°)	45' (0.75°) or less
7 - Seater			-	0°20' +/-45' (0.33° +/-0.75°) (*1) 0°7' +/-45' (0.11° +/-0.75°) (*2)	45' (0.75°) or less	
TXL		2 - Seater	-	0°7' +/-45' (0.11° +/-0.75°)	45' (0.75°) or less	
		5 - Seater	-	0°6' +/-45' (0.10° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	0°19' +/-45' (0.30° +/-0.75°) (*1) 0°5' +/-45' (0.07° +/-0.75°) (*2)	45' (0.75°) or less	
VX		5 - Seater	-	0°11' +/-45' (0.18° +/-0.75°) (*1) 0°24' +/-45' (0.40° +/-0.75°) (*2)	45' (0.75°) or less	
		7 - Seater	-	0°23' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less	
VXL		5 - Seater	-	0°11' +/-45' (0.18° +/-0.75°) (*1) 0°24' +/-45' (0.40° +/-0.75°) (*2)	45' (0.75°) or less	
		7 - Seater	-	0°23' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less	
KDJ155L-GJAEYW		TX	2 - Seater	-	0°4' +/-45' (0.07° +/-0.75°) (*1) 0°17' +/-45' (0.28° +/-0.75°) (*2)	45' (0.75°) or less
				for Cold Area	0°7' +/-45' (0.11° +/-0.75°) (*1) 0°21' +/-45' (0.35° +/-0.75°) (*2)	45' (0.75°) or less
	5 - Seater		-	0°2' +/-45' (0.02° +/-0.75°) (*1) 0°14' +/-45' (0.23° +/-0.75°) (*2)	45' (0.75°) or less	
			for Cold Area	0°4' +/-45' (0.06° +/-0.75°) (*1) 0°18' +/-45' (0.30° +/-0.75°) (*2)	45' (0.75°) or less	
			Spare Tire Less	0°3' +/-45' (0.04° +/-0.75°)	45' (0.75°) or less	
			Spare Tire Less for Cold Area	0°5' +/-45' (0.07° +/-0.75°)	45' (0.75°) or less	
	2 - Seater	-	0°4' +/-45' (0.06° +/-0.75°) (*1) 0°16' +/-45' (0.27° +/-0.75°) (*2)	45' (0.75°) or less		
		for Cold Area	0°6' +/-45' (0.10° +/-0.75°) (*1) 0°20' +/-45' (0.33° +/-0.75°) (*2)	45' (0.75°) or less		

KDJ155L-GJFEYW	TXL	5 - Seater	-	0°0' +/-45' (0.00° +/-0.75°) (*1) 0°13' +/-45' (0.21° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	0°3' +/-45' (0.04° +/-0.75°) (*1) 0°17' +/-45' (0.28° +/-0.75°) (*2)	45' (0.75°) or less
			Spare Tire Less	0°1' +/-45' (0.01° +/-0.75°)	45' (0.75°) or less
			Spare Tire Less for Cold Area	0°4' +/-45' (0.05° +/-0.75°)	45' (0.75°) or less
	VX	5 - Seater	-	-0°5' +/-45' (-0.08° +/-0.75°) (*1) 0°9' +/-45' (0.14° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	-0°2' +/-45' (-0.03° +/-0.75°) (*1) 0°13' +/-45' (0.22° +/-0.75°) (*2)	45' (0.75°) or less
			Spare Tire Less	-0°4' +/-45' (-0.06° +/-0.75°)	45' (0.75°) or less
			Spare Tire Less for Cold Area	-0°1' +/-45' (-0.02° +/-0.75°)	45' (0.75°) or less
	TX	2 - Seater	-	0°6' +/-45' (0.10° +/-0.75°) (*1) 0°19' +/-45' (0.31° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	0°0' +/-45' (0.00° +/-0.75°) (*1) 0°13' +/-45' (0.21° +/-0.75°) (*2)	45' (0.75°) or less
		5 - Seater	-	0°3' +/-45' (0.05° +/-0.75°) (*1) 0°16' +/-45' (0.26° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	-0°4' +/-45' (-0.06° +/-0.75°) (*1) 0°10' +/-45' (0.16° +/-0.75°) (*2)	45' (0.75°) or less
Spare Tire Less			0°4' +/-45' (0.07° +/-0.75°)	45' (0.75°) or less	
Spare Tire Less for Cold Area			-0°3' +/-45' (-0.05° +/-0.75°)	45' (0.75°) or less	
2 - Seater		-	0°4' +/-45' (0.07° +/-0.75°) (*1) 0°17' +/-45' (0.28° +/-0.75°) (*2)	45' (0.75°) or less	
		for Cold Area	0°7' +/-45' (0.11° +/-0.75°) (*1) 0°21' +/-45' (0.35° +/-0.75°) (*2)	45' (0.75°) or less	
5 - Seater		-	0°2' +/-45' (0.02° +/-0.75°) (*1) 0°14' +/-45' (0.23° +/-0.75°) (*2)	45' (0.75°) or less	
		for Cold Area	0°4' +/-45' (0.06° +/-0.75°) (*1) 0°18' +/-45' (0.30° +/-0.75°) (*2)	45' (0.75°) or less	
		Spare Tire Less	0°2' +/-45' (0.04° +/-0.75°)	45' (0.75°) or less	
		Spare Tire Less for Cold Area	0°5' +/-45' (0.07° +/-0.75°)	45' (0.75°) or less	
5 - Seater	-	-0°3' +/-45' (-0.04° +/-0.75°) (*1) 0°11' +/-45' (0.17° +/-0.75°) (*2)	45' (0.75°) or less		
		0°0' +/-45' (0.00° +/-0.75°) (*1)			

KDJ155R-GJAEYW	VX	5 - Seater		for Cold Area	0°15' +/-45' (0.25° +/-0.75°) (*2)	45' (0.75°) or less	
				Spare Tire Less	-0°2' +/-45' (-0.03° +/-0.75°)	45' (0.75°) or less	
				Spare Tire Less for Cold Area	0°1' +/-45' (0.02° +/-0.75°)	45' (0.75°) or less	
	KDJ155R-GJAEYW	TX	2 - Seater			-0°2' +/-45' (-0.03° +/-0.75°) (*1) 0°13' +/-45' (0.21° +/-0.75°) (*2)	45' (0.75°) or less
					for Cold Area	0°1' +/-45' (0.01° +/-0.75°)	45' (0.75°) or less
			5 - Seater			-0°5' +/-45' (-0.08° +/-0.75°) (*1) 0°10' +/-45' (0.17° +/-0.75°) (*2)	45' (0.75°) or less
					for Cold Area	-0°2' +/-45' (-0.04° +/-0.75°)	45' (0.75°) or less
					Spare Tire Less	-0°5' +/-45' (-0.07° +/-0.75°)	45' (0.75°) or less
					Spare Tire Less for Cold Area	-0°2' +/-45' (-0.03° +/-0.75°)	45' (0.75°) or less
		TXL	2 - Seater			-0°4' +/-45' (-0.06° +/-0.75°) (*1) 0°11' +/-45' (0.18° +/-0.75°) (*2)	45' (0.75°) or less
					for Cold Area	0°0' +/-45' (0.00° +/-0.75°)	45' (0.75°) or less
			5 - Seater			-0°7' +/-45' (-0.11° +/-0.75°) (*1) 0°8' +/-45' (0.14° +/-0.75°) (*2)	45' (0.75°) or less
				for Cold Area	-0°4' +/-45' (-0.07° +/-0.75°)	45' (0.75°) or less	
				Spare Tire Less	-0°6' +/-45' (-0.09° +/-0.75°)	45' (0.75°) or less	
				Spare Tire Less for Cold Area	-0°3' +/-45' (-0.05° +/-0.75°)	45' (0.75°) or less	
VX	5 - Seater			0°2' +/-45' (0.03° +/-0.75°) (*1) 0°14' +/-45' (0.22° +/-0.75°) (*2)	45' (0.75°) or less		
			for Cold Area	0°5' +/-45' (0.07° +/-0.75°)	45' (0.75°) or less		
			Spare Tire Less	0°3' +/-45' (0.05° +/-0.75°)	45' (0.75°) or less		
			Spare Tire Less for Cold Area	0°5' +/-45' (0.09° +/-0.75°)	45' (0.75°) or less		
KDJ155R-GJFEYW	TX	2 - Seater			0°0' +/-45' (0.00° +/-0.75°) (*1) 0°14' +/-45' (0.24° +/-0.75°) (*2)	45' (0.75°) or less	
				for Cold Area	0°2' +/-45' (0.04° +/-0.75°)	45' (0.75°) or less	
		5 - Seater			-0°4' +/-45' (-0.05° +/-0.75°) (*1) 0°12' +/-45' (0.19° +/-0.75°) (*2)	45' (0.75°) or less	
				for Cold Area	-0°1' +/-45' (-0.01° +/-0.75°)	45' (0.75°) or less	
				Spare Tire Less	-0°3' +/-45' (-0.04° +/-0.75°)	45' (0.75°) or less	
				Spare Tire Less for Cold Area	0°0' +/-45' (0.00° +/-0.75°)	45' (0.75°) or less	
	2 - Seater			-0°2' +/-45' (-0.03° +/-0.75°) (*1) 0°13' +/-45' (0.21° +/-0.75°) (*2)	45' (0.75°) or less		
				0°1' +/-45' (0.01° +/-0.75°)	45' (0.75°) or less		

	TXL	5 - Seater	-	for Cold Area +/-0.75°	+/-0.75°	or less
			-	-0°6' +/-45' (-0.09° +/-0.75°) (*1) 0°10' +/-45' (0.16° +/-0.75°) (*2)	45' (0.75°) or less	
			for Cold Area	-0°3' +/-45' (-0.05° +/-0.75°)	45' (0.75°) or less	
			Spare Tire Less	-0°4' +/-45' (-0.06° +/-0.75°)	45' (0.75°) or less	
	VX	5 - Seater	-	0°4' +/-45' (0.06° +/-0.75°) (*1) 0°15' +/-45' (0.25° +/-0.75°) (*2)	45' (0.75°) or less	
			for Cold Area	-0°7' +/-45' (-0.11° +/-0.75°)	45' (0.75°) or less	
			Spare Tire Less	0°5' +/-45' (0.08° +/-0.75°)	45' (0.75°) or less	
			Spare Tire Less for Cold Area	-0°1' +/-45' (-0.02° +/-0.75°)	45' (0.75°) or less	
	KDJ150R-GKAEYQ	TX	5 - Seater	-	0°28' +/-45' (0.47° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°29' +/-45' (0.49° +/-0.75°)	45' (0.75°) or less
		TXL	7 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less
VX		7 - Seater	-	0°15' +/-45' (0.25° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
VXL		7 - Seater	-	0°18' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°14' +/-45' (0.23° +/-0.75°)	45' (0.75°) or less	
KDJ150R-GKFEYQ		TX	5 - Seater	-	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°24' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less
	TXL	7 - Seater	-	0°20' +/-45' (0.33° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°21' +/-45' (0.34° +/-0.75°)	45' (0.75°) or less	
	VX	7 - Seater	-	0°16' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less	
	VXL	7 - Seater	-	0°15' +/-45' (0.25° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
	GRJ150R-GKAEKQ	TX	5 - Seater	-	0°28' +/-45' (0.47° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°29' +/-45' (0.48° +/-0.75°)	45' (0.75°) or less
TXL		7 - Seater	-	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less	
VX		7 - Seater	-	0°22' +/-45' (0.36° +/-0.75°)	45' (0.75°) or less	
			for Double Tank	0°22' +/-45'	45' (0.75°)	



			Type	(0.37° +/-0.75°)	or less
	VXL	7 - Seater	-	0°21' +/-45' (0.34° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°21' +/-45' (0.35° +/-0.75°)	45' (0.75°) or less
GRJ150R-GKFEKQ	TX	5 - Seater	-	0°29' +/-45' (0.48° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°30' +/-45' (0.49° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°28' +/-45' (0.46° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°29' +/-45' (0.47° +/-0.75°)	45' (0.75°) or less
	TXL	7 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
	VX	7 - Seater	-	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less
	VXL	7 - Seater	-	0°22' +/-45' (0.36° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less
KDJ155R-GJAEYW	TX	5 - Seater	-	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
	VX	5 - Seater	-	0°22' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less
KDJ150L-GKAEYV	TX	5 - Seater	-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°24' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	0°25' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°21' +/-45' (0.34° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°22' +/-45' (0.35° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°25' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less
VX	7 - Seater	-	0°15' +/-45' (0.25° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
VXL	7 - Seater	-	0°15' +/-45' (0.24° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type	0°16' +/-45' (0.26° +/-0.75°)	45' (0.75°) or less	
KDJ150L-	TX	5 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°24' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less
	TX	5 - Seater	-	0°24' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	0°25' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less

GKFEYV	TXL	7 - Seater	-	0°22' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°23' +/-45' (0.38° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	0°24' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°25' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less	
		VX	7 - Seater	-	0°17' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°17' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less
	VXL	7 - Seater	-	0°16' +/-45' (0.27° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°17' +/-45' (0.28° +/-0.75°)	45' (0.75°) or less	
	GRJ150L-GKAEKV	TX	5 - Seater	-	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°28' +/-45' (0.47° +/-0.75°)	45' (0.75°) or less
			7 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less
9 - Seater			-	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°28' +/-45' (0.47° +/-0.75°)	45' (0.75°) or less	
TXL		5 - Seater	-	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	0°24' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°25' +/-45' (0.40° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less	
VX		7 - Seater	-	0°18' +/-45' (0.30° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less	
VXL		7 - Seater	-	0°18' +/-45' (0.29° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°19' +/-45' (0.31° +/-0.75°)	45' (0.75°) or less	
GRJ150L-GKFEKV		TX	5 - Seater	-	0°29' +/-45' (0.48° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°30' +/-45' (0.49° +/-0.75°)	45' (0.75°) or less
			7 - Seater	-	0°27' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°28' +/-45' (0.47° +/-0.75°)	45' (0.75°) or less
			9 - Seater	-	0°29' +/-45' (0.48° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°30' +/-45' (0.49° +/-0.75°)	45' (0.75°) or less
		TXL	5 - Seater	-	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	0°28' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less
	7 - Seater		-	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less	
	9 - Seater		-	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°28' +/-45' (0.45° +/-0.75°)	45' (0.75°) or less	
	VX	7 - Seater	-	0°20' +/-45' (0.32° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°20' +/-45' (0.34° +/-0.75°)	45' (0.75°) or less	
	VXL	7 - Seater	-	0°19' +/-45' (0.32° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	0°20' +/-45'	45' (0.75°)	

			Type	(0.33° +/-0.75°)	or less
TRJ150L-GKPEKV	TX	5 - Seater	-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°23' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	0°24' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°22' +/-45' (0.37° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°24' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less
TRJ150L-GKMEKV	TX	5 - Seater	-	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°25' +/-45' (0.41° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°27' +/-45' (0.44° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	0°24' +/-45' (0.39° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less
TRJ155L-GKPEKV	TX	5 - Seater	-	0°26' +/-45' (0.43° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	0°25' +/-45' (0.42° +/-0.75°)	45' (0.75°) or less

(\*1) Light duty

(\*2) Hard duty

**Standard Caster Inclination (Unloaded Vehicle):**

Vehicle Model	Grade	Seating Capacity	Item	Caster Inclination	Right-left Difference	
KDJ150L-GKAEY	TX	5 - Seater	-	2°43' +/-45' (2.71° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°48' +/-45' (2.80° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	2°43' +/-45' (2.71° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°48' +/-45' (2.80° +/-0.75°)	45' (0.75°) or less	
		TXL	5 - Seater	-	2°44' +/-45' (2.73° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less
			7 - Seater	-	2°47' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less
	for Double Tank Type			2°53' +/-45' (2.88° +/-0.75°)	45' (0.75°) or less	
	9 - Seater		-	2°44' +/-45' (2.73° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less	
	VX	5 - Seater	-	2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°56' +/-45' (2.94° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°55' +/-45' (2.91° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°58' +/-45' (2.96° +/-0.75°)	45' (0.75°) or less	
	VXL	7 - Seater	-	3°7' +/-45' (3.12° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	3°8' +/-45' (3.14° +/-0.75°)	45' (0.75°) or less	
			5 - Seater	-	2°42' +/-45' (2.70° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°47' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less
			-	2°46' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less	

KDJ150L-GKFEY	TX	7 - Seater	-	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less	
	9 - Seater	7 - Seater	-	2°42' +/-45' (2.70° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°48' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less	
	5 - Seater	9 - Seater	-	2°44' +/-45' (2.74° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less	
	7 - Seater	5 - Seater	-	2°47' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°53' +/-45' (2.88° +/-0.75°)	45' (0.75°) or less	
	9 - Seater	7 - Seater	-	2°45' +/-45' (2.74° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less	
	5 - Seater	VX	-	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°55' +/-45' (2.91° +/-0.75°)	45' (0.75°) or less	
7 - Seater	5 - Seater	-	2°53' +/-45' (2.89° +/-0.75°)	45' (0.75°) or less		
		for Double Tank Type	2°56' +/-45' (2.94° +/-0.75°)	45' (0.75°) or less		
7 - Seater	VXL	-	3°7' +/-45' (3.11° +/-0.75°)	45' (0.75°) or less		
		for Double Tank Type	3°8' +/-45' (3.13° +/-0.75°)	45' (0.75°) or less		
KDJ150R-GKAEY	TX	5 - Seater	-	2°43' +/-45' (2.72° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°49' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	9 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°52' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less
		9 - Seater	5 - Seater	-	2°43' +/-45' (2.72° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	9 - Seater	-	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°55' +/-45' (2.92° +/-0.75°)	45' (0.75°) or less
		9 - Seater	5 - Seater	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less
	7 - Seater	VX	-	2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°56' +/-45' (2.94° +/-0.75°)	45' (0.75°) or less	
	7 - Seater	VXL	-	2°55' +/-45' (2.91° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°58' +/-45' (2.96° +/-0.75°)	45' (0.75°) or less	
	7 - Seater	TX	-	3°7' +/-45' (3.12° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	3°8' +/-45' (3.14° +/-0.75°)	45' (0.75°) or less	
TXL	5 - Seater	-	2°44' +/-45' (2.73° +/-0.75°)	45' (0.75°) or less		
		for Double Tank Type	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less		
	7 - Seater	5 - Seater	-	2°47' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°53' +/-45' (2.88° +/-0.75°)	45' (0.75°) or less	
	9 - Seater	7 - Seater	-	2°43' +/-45' (2.72° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°49' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less	

KDJ150R-GKFEY	VX	7 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less	
		5 - Seater	-	2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°56' +/-45' (2.94° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°55' +/-45' (2.91° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°58' +/-45' (2.96° +/-0.75°)	45' (0.75°) or less	
	VXL	7 - Seater	-	3°7' +/-45' (3.12° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	3°8' +/-45' (3.14° +/-0.75°)	45' (0.75°) or less	
	GRJ150L-GKAEK	TX	5 - Seater	-	2°41' +/-45' (2.69° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less
			7 - Seater	-	2°45' +/-45' (2.75° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less
9 - Seater			-	2°42' +/-45' (2.69° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less	
TXL		5 - Seater	-	2°44' +/-45' (2.74° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°49' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°48' +/-45' (2.80° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	2°44' +/-45' (2.74° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°49' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less	
VX		5 - Seater	-	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°54' +/-45' (2.91° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°54' +/-45' (2.90° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°56' +/-45' (2.93° +/-0.75°)	45' (0.75°) or less	
VXL		7 - Seater	-	3°7' +/-45' (3.11° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	3°8' +/-45' (3.13° +/-0.75°)	45' (0.75°) or less	
GRJ150L-GKFEK		TX	5 - Seater	-	2°41' +/-45' (2.68° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°46' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less
			7 - Seater	-	2°45' +/-45' (2.74° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less
			9 - Seater	-	2°41' +/-45' (2.69° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°46' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	2°44' +/-45' (2.73° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°48' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°51' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	2°44' +/-45' (2.73° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°48' +/-45' (2.80° +/-0.75°)	45' (0.75°) or less	
	5 - Seater	-	2°51' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less		
		for Double Tank	2°56' +/-45'	45' (0.75°)		

LJ150L-GKMEE	VX	7 - Seater	-	(2.93° +/-0.75°)	or less	
			for Double Tank Type	2°55' +/-45' (2.92° +/-0.75°)	45' (0.75°) or less	
	VXL	7 - Seater	-	3°9' +/-45' (3.15° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	3°10' +/-45' (3.16° +/-0.75°)	45' (0.75°) or less	
	LJ150R-GKMEE	TX	5 - Seater	-	2°41' +/-45' (2.69° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°38' +/-45' (2.63° +/-0.75°)	45' (0.75°) or less
			7 - Seater	-	2°45' +/-45' (2.75° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less
			9 - Seater	-	2°40' +/-45' (2.67° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less
		TXL	5 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less
7 - Seater			-	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°55' +/-45' (2.92° +/-0.75°)	45' (0.75°) or less	
9 - Seater			-	2°46' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less	
TRJ150L-GKPEK	TX	5 - Seater	-	2°42' +/-45' (2.70° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°48' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°46' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	2°41' +/-45' (2.69° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less	
	TXL	5 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°51' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°56' +/-45' (2.93° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°51' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less	
LJ150L-GKPEK	TX	5 - Seater	-	2°42' +/-45' (2.71° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°47' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	2°42' +/-45' (2.71° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°47' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less	
	TXL	5 - Seater	-	2°47' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°55' +/-45' (2.92° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°44' +/-45' (2.74° +/-0.75°)	45' (0.75°) or less	

TRJ150L-GKMEK	TX	5 - Seater	-	2°48' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less
		for Double Tank Type	-	2°48' +/-45' (2.80° +/-0.75°)	45' (0.75°) or less
	7 - Seater	-	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type	-	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	2°53' +/-45' (2.89° +/-0.75°)	45' (0.75°) or less
		for Double Tank Type	-	2°51' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less
TRJ150R-GKMEK	TX	7 - Seater	-	2°56' +/-45' (2.93° +/-0.75°)	45' (0.75°) or less
		for Double Tank Type	-	2°42' +/-45' (2.69° +/-0.75°)	45' (0.75°) or less
	5 - Seater	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type	-	2°45' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less
	TXL	7 - Seater	-	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less
		for Double Tank Type	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less
TRJ150L-GKAEYW	TX	5 - Seater	-	2°51' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less
		for Double Tank Type	-	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less
	7 - Seater	-	2°54' +/-45' (2.90° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type	-	2°40' +/-45' (2.67° +/-0.75°)	45' (0.75°) or less
	TXL	2 - Seater	-	2°41' +/-45' (2.68° +/-0.75°)	45' (0.75°) or less
		for Cold Area	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less
KDJ150L-GKAEYW	TX	5 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less
		for Cold Area	-	2°38' +/-45' (2.63° +/-0.75°)	45' (0.75°) or less
	7 - Seater	-	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less	
		for Cold Area	-	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less
	TXL	2 - Seater	-	2°44' +/-45' (2.73° +/-0.75°)	45' (0.75°) or less
		for Cold Area	-	2°44' +/-45' (2.73° +/-0.75°)	45' (0.75°) or less
5 - Seater	-	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less		
	for Cold Area	-	2°51' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less	
7 - Seater	-	2°54' +/-45' (2.89° +/-0.75°)	45' (0.75°) or less		
	for Cold Area	-	2°54' +/-45' (2.90° +/-0.75°)	45' (0.75°) or less	
KDJ150L-GKAEYW	VX	5 - Seater	-	2°51' +/-45' (2.86° +/-0.75°) (*1) 2°52' +/-45' (2.87° +/-0.75°) (*2)	45' (0.75°) or less
		for Cold Area	-	2°51' +/-45' (2.85° +/-0.75°) (*1) 2°51' +/-45' (2.86° +/-0.75°) (*2)	45' (0.75°) or less
	7 - Seater	-	2°55' +/-45' (2.91° +/-0.75°) (*1) 2°55' +/-45' (2.92° +/-0.75°) (*2)	45' (0.75°) or less	
		for Cold Area	-	2°54' +/-45' (2.90° +/-0.75°)	45' (0.75°) or less
	5 - Seater	-	3°5' +/-45' (3.08° +/-0.75°) (*1) 3°5' +/-45' (3.09° +/-0.75°) (*2)	45' (0.75°) or less	
		for Cold Area	-		

KDJ150L-GKFEYW	VXL		for Cold Area	3°4' +/-45' (3.07° +/-0.75°) (*1) 3°5' +/-45' (3.08° +/-0.75°) (*2)	45' (0.75°) or less	
		7 - Seater	-	3°7' +/-45' (3.11° +/-0.75°)	45' (0.75°) or less	
	TX	2 - Seater	-	2°37' +/-45' (2.62° +/-0.75°)	45' (0.75°) or less	
			for Cold Area	2°38' +/-45' (2.63° +/-0.75°)	45' (0.75°) or less	
	5 - Seater	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less		
		for Cold Area	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less		
		Spare Tire Less	2°38' +/-45' (2.63° +/-0.75°)	45' (0.75°) or less		
		-	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less		
	7 - Seater	-	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less		
		for Cold Area	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less		
	TXL	2 - Seater	-	2°43' +/-45' (2.72° +/-0.75°)	45' (0.75°) or less	
			for Cold Area	2°44' +/-45' (2.73° +/-0.75°)	45' (0.75°) or less	
		5 - Seater	-	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less	
			for Cold Area	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°53' +/-45' (2.89° +/-0.75°)	45' (0.75°) or less	
			for Cold Area	2°54' +/-45' (2.90° +/-0.75°)	45' (0.75°) or less	
	VX	5 - Seater	-	2°50' +/-45' (2.83° +/-0.75°) (*1) 2°50' +/-45' (2.84° +/-0.75°) (*2)	45' (0.75°) or less	
			for Cold Area	2°49' +/-45' (2.82° +/-0.75°) (*1) 2°50' +/-45' (2.83° +/-0.75°) (*2)	45' (0.75°) or less	
		7 - Seater	-	2°53' +/-45' (2.89° +/-0.75°)	45' (0.75°) or less	
			for Cold Area	2°53' +/-45' (2.88° +/-0.75°)	45' (0.75°) or less	
		VXL	5 - Seater	-	3°4' +/-45' (3.07° +/-0.75°)	45' (0.75°) or less
				for Cold Area	3°4' +/-45' (3.06° +/-0.75°)	45' (0.75°) or less
	7 - Seater		-	3°6' +/-45' (3.10° +/-0.75°)	45' (0.75°) or less	
			for Cold Area	3°5' +/-45' (3.09° +/-0.75°) (*1) 3°6' +/-45' (3.09° +/-0.75°) (*2)	45' (0.75°) or less	
TX	2 - Seater	-	2°43' +/-45' (2.72° +/-0.75°)	45' (0.75°) or less		
		for Cold Area	2°40' +/-45' (2.66° +/-0.75°)	45' (0.75°) or less		
	5 - Seater	-	2°48' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less		
		for Cold Area	2°45' +/-45' (2.74° +/-0.75°)	45' (0.75°) or less		
		Spare Tire Less	2°40' +/-45' (2.66° +/-0.75°)	45' (0.75°) or less		
	7 - Seater	-	2°54' +/-45' (2.91° +/-0.75°)	45' (0.75°) or less		
		for Cold Area	2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less		
	2 - Seater	-	2°44' +/-45' (2.73° +/-0.75°)	45' (0.75°) or less		
		for Cold Area	2°40' +/-45' (2.66° +/-0.75°)	45' (0.75°) or less		
			-	2°52' +/-45'	45' (0.75°)	



KDJ150R-GKAEYW	TXL	5 - Seater	-	(2.87° +/-0.75°)	or less	
			for Cold Area	2°48' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°55' +/-45' (2.92° +/-0.75°)	45' (0.75°) or less	
			for Cold Area	2°52' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less	
		VX	5 - Seater	-	2°52' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less
				for Cold Area	2°51' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less
	7 - Seater	-	2°55' +/-45' (2.92° +/-0.75°)	45' (0.75°) or less		
		for Cold Area	2°55' +/-45' (2.91° +/-0.75°)	45' (0.75°) or less		
	VXL	5 - Seater	-	3°5' +/-45' (3.08° +/-0.75°)	45' (0.75°) or less	
			for Cold Area	3°5' +/-45' (3.08° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	3°7' +/-45' (3.11° +/-0.75°) (*1) 3°7' +/-45' (3.12° +/-0.75°) (*2)	45' (0.75°) or less	
			for Cold Area	3°7' +/-45' (3.11° +/-0.75°)	45' (0.75°) or less	
KDJ150R-GKFEYW		TX	2 - Seater	-	2°43' +/-45' (2.71° +/-0.75°)	45' (0.75°) or less
				for Cold Area	2°39' +/-45' (2.65° +/-0.75°)	45' (0.75°) or less
	5 - Seater		-	2°48' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less	
			for Cold Area	2°44' +/-45' (2.74° +/-0.75°)	45' (0.75°) or less	
			Spare Tire Less	2°39' +/-45' (2.65° +/-0.75°)	45' (0.75°) or less	
	7 - Seater		-	2°51' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less	
		for Cold Area	2°48' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less		
	TXL	2 - Seater	-	2°43' +/-45' (2.72° +/-0.75°)	45' (0.75°) or less	
			for Cold Area	2°40' +/-45' (2.66° +/-0.75°)	45' (0.75°) or less	
		5 - Seater	-	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less	
			for Cold Area	2°48' +/-45' (2.80° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°58' +/-45' (2.96° +/-0.75°)	45' (0.75°) or less	
for Cold Area			2°54' +/-45' (2.89° +/-0.75°)	45' (0.75°) or less		
VX	5 - Seater	-	2°50' +/-45' (2.83° +/-0.75°) (*1) 2°50' +/-45' (2.84° +/-0.75°) (*2)	45' (0.75°) or less		
		for Cold Area	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less		
	7 - Seater	-	2°53' +/-45' (2.89° +/-0.75°) (*1) 2°54' +/-45' (2.89° +/-0.75°) (*2)	45' (0.75°) or less		
		for Cold Area	2°53' +/-45' (2.89° +/-0.75°)	45' (0.75°) or less		
	VXL	5 - Seater	-	3°4' +/-45' (3.07° +/-0.75°) (*1) 3°5' +/-45' (3.08° +/-0.75°) (*2)	45' (0.75°) or less	
			for Cold Area	3°4' +/-45' (3.07° +/-0.75°)	45' (0.75°) or less	
7 - Seater		-	3°6' +/-45' (3.10° +/-0.75°) (*1) 3°7' +/-45' (3.11° +/-0.75°) (*2)	45' (0.75°) or less		
		for Cold Area	3°6' +/-45' (3.10° +/-0.75°)	45' (0.75°) or less		
		2 - Seater	-	2°39' +/-45' (2.66° +/-0.75°)	45' (0.75°) or less	

GRJ150L-GKAEKW	TX	5 - Seater	-	2°46' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°57' +/-45' (2.95° +/-0.75°) (*1) 2°50' +/-45' (2.83° +/-0.75°) (*2)	45' (0.75°) or less	
	TXL	2 - Seater	-	2°42' +/-45' (2.69° +/-0.75°)	45' (0.75°) or less	
		5 - Seater	-	2°50' +/-45' (2.83° +/-0.75°) (*1) 2°57' +/-45' (2.95° +/-0.75°) (*2)	45' (0.75°) or less	
		7 - Seater	-	3°1' +/-45' (3.01° +/-0.75°)	45' (0.75°) or less	
	VX	5 - Seater	-	2°58' +/-45' (2.96° +/-0.75°) (*1) 2°58' +/-45' (2.97° +/-0.75°) (*2)	45' (0.75°) or less	
		7 - Seater	-	3°1' +/-45' (3.02° +/-0.75°)	45' (0.75°) or less	
	VXL	5 - Seater	-	3°12' +/-45' (3.20° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	3°14' +/-45' (3.23° +/-0.75°)	45' (0.75°) or less	
	GRJ150R-GKAEKW	TX	2 - Seater	-	2°45' +/-45' (2.75° +/-0.75°)	45' (0.75°) or less
			5 - Seater	-	2°53' +/-45' (2.89° +/-0.75°)	45' (0.75°) or less
			7 - Seater	-	2°50' +/-45' (2.83° +/-0.75°) (*1) 2°57' +/-45' (2.95° +/-0.75°) (*2)	45' (0.75°) or less
TXL		2 - Seater	-	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less	
		5 - Seater	-	2°57' +/-45' (2.96° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°54' +/-45' (2.90° +/-0.75°) (*1) 3°1' +/-45' (3.01° +/-0.75°) (*2)	45' (0.75°) or less	
VX		5 - Seater	-	2°56' +/-45' (2.94° +/-0.75°) (*1) 2°49' +/-45' (2.82° +/-0.75°) (*2)	45' (0.75°) or less	
		7 - Seater	-	2°52' +/-45' (2.87° +/-0.75°) (*1) 2°53' +/-45' (2.88° +/-0.75°) (*2)	45' (0.75°) or less	
VXL		5 - Seater	-	3°10' +/-45' (3.16° +/-0.75°) (*1) 3°3' +/-45' (3.05° +/-0.75°) (*2)	45' (0.75°) or less	
		7 - Seater	-	3°5' +/-45' (3.08° +/-0.75°)	45' (0.75°) or less	
TX		2 - Seater	-	3°11' +/-45' (3.19° +/-0.75°) (*1) 2°51' +/-45' (2.85° +/-0.75°) (*2)	45' (0.75°) or less	
			for Cold Area	3°9' +/-45' (3.16° +/-0.75°) (*1) 2°48' +/-45' (2.80° +/-0.75°) (*2)	45' (0.75°) or less	
	-	-	3°20' +/-45' (3.33° +/-0.75°) (*1) 2°59' +/-45' (2.98° +/-0.75°) (*2)	45' (0.75°) or less		

KDJ155L-GJAEYW

TXL

VX

TX

KDJ155L-GJFEYW

5 - Seater	for Cold Area	3°18' +/-45' (3.30° +/-0.75°) (*1)	45' (0.75°) or less	
		2°57' +/-45' (2.94° +/-0.75°) (*2)		
		Spare Tire Less		3°12' +/-45' (3.20° +/-0.75°)
	Spare Tire Less for Cold Area	3°10' +/-45' (3.17° +/-0.75°)	45' (0.75°) or less	
		-		
	2 - Seater	for Cold Area	3°13' +/-45' (3.22° +/-0.75°) (*1)	45' (0.75°) or less
			2°53' +/-45' (2.88° +/-0.75°) (*2)	
			3°11' +/-45' (3.19° +/-0.75°) (*1)	
		Spare Tire Less for Cold Area	2°50' +/-45' (2.83° +/-0.75°) (*2)	45' (0.75°) or less
			3°22' +/-45' (3.36° +/-0.75°) (*1)	
			3°1' +/-45' (3.02° +/-0.75°) (*2)	
	5 - Seater	for Cold Area	3°20' +/-45' (3.33° +/-0.75°) (*1)	45' (0.75°) or less
2°58' +/-45' (2.97° +/-0.75°) (*2)				
3°14' +/-45' (3.24° +/-0.75°)				
Spare Tire Less for Cold Area		3°12' +/-45' (3.21° +/-0.75°)	45' (0.75°) or less	
		-		
		3°29' +/-45' (3.48° +/-0.75°) (*1)		
5 - Seater	for Cold Area	3°8' +/-45' (3.14° +/-0.75°) (*2)	45' (0.75°) or less	
		3°26' +/-45' (3.44° +/-0.75°) (*1)		
		3°6' +/-45' (3.10° +/-0.75°) (*2)		
	Spare Tire Less for Cold Area	3°21' +/-45' (3.36° +/-0.75°)	45' (0.75°) or less	
		3°19' +/-45' (3.32° +/-0.75°)		
		-		
2 - Seater	for Cold Area	3°10' +/-45' (3.17° +/-0.75°) (*1)	45' (0.75°) or less	
		2°50' +/-45' (2.83° +/-0.75°) (*2)		
		3°12' +/-45' (3.20° +/-0.75°) (*1)		
	Spare Tire Less for Cold Area	2°51' +/-45' (2.86° +/-0.75°) (*2)	45' (0.75°) or less	
		3°19' +/-45' (3.32° +/-0.75°) (*1)		
		2°59' +/-45' (2.98° +/-0.75°) (*2)		
	5 - Seater	for Cold Area	3°21' +/-45' (3.34° +/-0.75°) (*1)	45' (0.75°) or less
			3°0' +/-45' (3.00° +/-0.75°) (*2)	
			3°12' +/-45' (3.20° +/-0.75°)	
		Spare Tire Less for Cold Area	3°13' +/-45' (3.22° +/-0.75°)	45' (0.75°) or less
			-	
			3°13' +/-45' (3.22° +/-0.75°) (*1)	
2 - Seater	for Cold Area	2°52' +/-45' (2.87° +/-0.75°) (*2)	45' (0.75°) or less	
		3°11' +/-45' (3.19° +/-0.75°)		

KDJ155R-GJAEYW	TXL	5 - Seater	for Cold Area	(*1) 2°50' +/-45' (2.83° +/-0.75°) (*2)	45' (0.75°) or less
			-	3°22' +/-45' (3.36° +/-0.75°) (*1) 3°1' +/-45' (3.02° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	3°20' +/-45' (3.34° +/-0.75°) (*1) 2°59' +/-45' (2.98° +/-0.75°) (*2)	45' (0.75°) or less
			Spare Tire Less	3°15' +/-45' (3.24° +/-0.75°)	45' (0.75°) or less
			Spare Tire Less for Cold Area	3°13' +/-45' (3.22° +/-0.75°)	45' (0.75°) or less
	VX	5 - Seater	-	3°27' +/-45' (3.44° +/-0.75°) (*1) 3°6' +/-45' (3.11° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	3°25' +/-45' (3.41° +/-0.75°) (*1) 3°4' +/-45' (3.06° +/-0.75°) (*2)	45' (0.75°) or less
			Spare Tire Less	3°19' +/-45' (3.32° +/-0.75°)	45' (0.75°) or less
			Spare Tire Less for Cold Area	3°18' +/-45' (3.29° +/-0.75°)	45' (0.75°) or less
	TX	2 - Seater	-	3°13' +/-45' (3.22° +/-0.75°) (*1) 2°53' +/-45' (2.88° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	3°12' +/-45' (3.19° +/-0.75°)	45' (0.75°) or less
		5 - Seater	-	3°21' +/-45' (3.36° +/-0.75°) (*1) 3°1' +/-45' (3.02° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	3°20' +/-45' (3.33° +/-0.75°)	45' (0.75°) or less
			Spare Tire Less	3°15' +/-45' (3.24° +/-0.75°)	45' (0.75°) or less
			Spare Tire Less for Cold Area	3°13' +/-45' (3.21° +/-0.75°)	45' (0.75°) or less
		TXL	2 - Seater	-	3°16' +/-45' (3.27° +/-0.75°) (*1) 2°55' +/-45' (2.92° +/-0.75°) (*2)
for Cold Area				3°14' +/-45' (3.24° +/-0.75°)	45' (0.75°) or less
5 - Seater			-	3°24' +/-45' (3.41° +/-0.75°) (*1) 3°4' +/-45' (3.06° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	3°23' +/-45' (3.38° +/-0.75°)	45' (0.75°) or less
	Spare Tire Less		3°17' +/-45' (3.29° +/-0.75°)	45' (0.75°) or less	
	Spare Tire Less for Cold Area		3°15' +/-45' (3.26° +/-0.75°)	45' (0.75°) or less	
VX	5 - Seater	-	3°26' +/-45' (3.43° +/-0.75°) (*1) 3°6' +/-45' (3.10° +/-0.75°) (*2)	45' (0.75°) or less	
		for Cold Area	3°24' +/-45' (3.40° +/-0.75°)	45' (0.75°) or less	
		Spare Tire Less	3°19' +/-45' (3.31° +/-0.75°)	45' (0.75°) or less	
		Spare Tire Less for Cold Area	3°17' +/-45' (3.28° +/-0.75°)	45' (0.75°) or less	
				3°13' +/-45' (3.22° +/-0.75°)	

KDJ155R-GJFEYW	TX	2 - Seater	-	(*1) 2°52' +/-45' (2.87° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	3°11' +/-45' (3.19° +/-0.75°)	45' (0.75°) or less
		5 - Seater	-	3°21' +/-45' (3.36° +/-0.75°) (*1) 3°0' +/-45' (3.01° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	3°19' +/-45' (3.32° +/-0.75°)	45' (0.75°) or less
	Spare Tire Less		3°14' +/-45' (3.24° +/-0.75°)	45' (0.75°) or less	
	Spare Tire Less for Cold Area		3°13' +/-45' (3.21° +/-0.75°)	45' (0.75°) or less	
	TXL	2 - Seater	-	3°16' +/-45' (3.26° +/-0.75°) (*1) 2°55' +/-45' (2.91° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	3°14' +/-45' (3.23° +/-0.75°)	45' (0.75°) or less
		5 - Seater	-	3°24' +/-45' (3.40° +/-0.75°) (*1) 3°3' +/-45' (3.05° +/-0.75°) (*2)	45' (0.75°) or less
			for Cold Area	3°22' +/-45' (3.37° +/-0.75°)	45' (0.75°) or less
			Spare Tire Less	3°17' +/-45' (3.28° +/-0.75°)	45' (0.75°) or less
			Spare Tire Less for Cold Area	3°15' +/-45' (3.25° +/-0.75°)	45' (0.75°) or less
VX	5 - Seater	-	3°25' +/-45' (3.41° +/-0.75°) (*1) 3°5' +/-45' (3.08° +/-0.75°) (*2)	45' (0.75°) or less	
		for Cold Area	3°27' +/-45' (3.45° +/-0.75°)	45' (0.75°) or less	
		Spare Tire Less	3°17' +/-45' (3.29° +/-0.75°)	45' (0.75°) or less	
		Spare Tire Less for Cold Area	3°20' +/-45' (3.33° +/-0.75°)	45' (0.75°) or less	
KDJ150R-GKAEYQ	TX	5 - Seater	-	2°40' +/-45' (2.67° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	2°45' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less
	7 - Seater	-	2°44' +/-45' (2.73° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less	
	TXL	7 - Seater	-	2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	2°56' +/-45' (2.93° +/-0.75°)	45' (0.75°) or less
	VX	7 - Seater	-	2°58' +/-45' (2.97° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	3°2' +/-45' (3.03° +/-0.75°)	45' (0.75°) or less
	VXL	7 - Seater	-	3°6' +/-45' (3.10° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	3°10' +/-45' (3.16° +/-0.75°)	45' (0.75°) or less
KDJ150R-GKFEYQ	TX	5 - Seater	-	2°43' +/-45' (2.72° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	2°43' +/-45' (2.72° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	2°48' +/-45' (2.80° +/-0.75°)	45' (0.75°) or less
	TXL	7 - Seater	-	2°54' +/-45' (2.90° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	2°59' +/-45' (2.99° +/-0.75°)	45' (0.75°) or less
	VX	7 - Seater	-	2°58' +/-45'	45' (0.75°) or less
				(2.96° +/-0.75°)	45' (0.75°) or less

	VXL	7 - Seater		for Double Tank Type	3°1' +/-45' (3.01° +/-0.75°)	45' (0.75°) or less	
			-		3°8' +/-45' (3.13° +/-0.75°)	45' (0.75°) or less	
GRJ150R-GKAEKQ	TX	5 - Seater	-		3°9' +/-45' (3.15° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		2°41' +/-45' (2.69° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type		2°46' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less		
		-		2°45' +/-45' (2.75° +/-0.75°)	45' (0.75°) or less		
	7 - Seater	-		2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less		
		for Double Tank Type		2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less		
	TXL	7 - Seater	-		2°56' +/-45' (2.94° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		2°56' +/-45' (2.93° +/-0.75°)	45' (0.75°) or less	
	VX	7 - Seater	-		2°58' +/-45' (2.96° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		3°6' +/-45' (3.10° +/-0.75°)	45' (0.75°) or less	
	VXL	7 - Seater	-		3°7' +/-45' (3.12° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		2°41' +/-45' (2.68° +/-0.75°)	45' (0.75°) or less	
GRJ150R-GKFEKQ	TX	5 - Seater	-		2°45' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		2°44' +/-45' (2.74° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type		2°48' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less		
		-		2°51' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less		
	7 - Seater	-		2°56' +/-45' (2.93° +/-0.75°)	45' (0.75°) or less		
		for Double Tank Type		2°54' +/-45' (2.91° +/-0.75°)	45' (0.75°) or less		
	TXL	7 - Seater	-		2°57' +/-45' (2.95° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		3°6' +/-45' (3.10° +/-0.75°)	45' (0.75°) or less	
	VX	7 - Seater	-		3°6' +/-45' (3.11° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		2°54' +/-45' (2.90° +/-0.75°)	45' (0.75°) or less	
	KDJ155R-GJAEYW	TX	5 - Seater	-		2°56' +/-45' (2.93° +/-0.75°)	45' (0.75°) or less
		TXL	5 - Seater	-		3°3' +/-45' (3.05° +/-0.75°)	45' (0.75°) or less
VX		5 - Seater	-		2°43' +/-45' (2.71° +/-0.75°)	45' (0.75°) or less	
KDJ150L-GKAEYV	TX	5 - Seater	-		2°48' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-		2°52' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		2°43' +/-45' (2.72° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-		2°48' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less	
	TXL	5 - Seater	-		2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		2°52' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-		2°57' +/-45' (2.94° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		2°46' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-		2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type		2°57' +/-45' (2.94° +/-0.75°)	45' (0.75°) or less	
VX	7 - Seater	-		2°60' +/-45'	45' (0.75°)		

			Type	(3.00° +/-0.75°)	or less	
	VXL	7 - Seater	-	3°8' +/-45' (3.13° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	3°9' +/-45' (3.15° +/-0.75°)	45' (0.75°) or less	
KDJ150L-GKFEYV	TX	5 - Seater	-	2°42' +/-45' (2.71° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°48' +/-45' (2.80° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	2°42' +/-45' (2.71° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°48' +/-45' (2.80° +/-0.75°)	45' (0.75°) or less	
	TXL	5 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°56' +/-45' (2.93° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°52' +/-45' (2.87° +/-0.75°)	45' (0.75°) or less	
	VX	7 - Seater	-	2°55' +/-45' (2.91° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°58' +/-45' (2.97° +/-0.75°)	45' (0.75°) or less	
	VXL	7 - Seater	-	3°7' +/-45' (3.12° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	3°8' +/-45' (3.14° +/-0.75°)	45' (0.75°) or less	
	GRJ150L-GKAEKV	TX	5 - Seater	-	2°42' +/-45' (2.70° +/-0.75°)	45' (0.75°) or less
				for Double Tank Type	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less
7 - Seater			-	2°46' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less	
9 - Seater			-	2°42' +/-45' (2.70° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less	
TXL		5 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°52' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less	
		7 - Seater	-	2°51' +/-45' (2.85° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°55' +/-45' (2.91° +/-0.75°)	45' (0.75°) or less	
		9 - Seater	-	2°47' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°52' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less	
VX		7 - Seater	-	2°55' +/-45' (2.92° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°58' +/-45' (2.96° +/-0.75°)	45' (0.75°) or less	
VXL		7 - Seater	-	3°8' +/-45' (3.13° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	3°9' +/-45' (3.14° +/-0.75°)	45' (0.75°) or less	
TX		5 - Seater	-	2°41' +/-45' (2.69° +/-0.75°)	45' (0.75°) or less	
			for Double Tank Type	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less	
	7 - Seater	-	2°45' +/-45' (2.75° +/-0.75°)	45' (0.75°) or less		
		for Double Tank Type	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less		
			-	2°42' +/-45' (2.69° +/-0.75°)	45' (0.75°) or less	

GRJ150L-GKFEKV	TXL	9 - Seater	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less
		5 - Seater	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	2°54' +/-45' (2.90° +/-0.75°)	45' (0.75°) or less
	9 - Seater	-	2°45' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type	2°50' +/-45' (2.83° +/-0.75°)	45' (0.75°) or less	
	VX	7 - Seater	-	2°54' +/-45' (2.90° +/-0.75°)	45' (0.75°) or less
			for Double Tank Type	2°57' +/-45' (2.94° +/-0.75°)	45' (0.75°) or less
VXL	7 - Seater	-	3°7' +/-45' (3.12° +/-0.75°)	45' (0.75°) or less	
		for Double Tank Type	3°8' +/-45' (3.14° +/-0.75°)	45' (0.75°) or less	
TRJ150L-GKPEKV	TX	5 - Seater	-	2°46' +/-45' (2.76° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	2°49' +/-45' (2.82° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	2°46' +/-45' (2.77° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	2°48' +/-45' (2.79° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	2°51' +/-45' (2.86° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	2°48' +/-45' (2.80° +/-0.75°)	45' (0.75°) or less
TRJ150L-GKMEKV	TX	5 - Seater	-	2°45' +/-45' (2.74° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	2°48' +/-45' (2.81° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	2°45' +/-45' (2.75° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less
		7 - Seater	-	2°50' +/-45' (2.84° +/-0.75°)	45' (0.75°) or less
		9 - Seater	-	2°47' +/-45' (2.78° +/-0.75°)	45' (0.75°) or less
TRJ155L-GKPEKV	TX	5 - Seater	-	2°56' +/-45' (2.94° +/-0.75°)	45' (0.75°) or less
	TXL	5 - Seater	-	2°56' +/-45' (2.94° +/-0.75°)	45' (0.75°) or less

(\*1) Light duty

(\*2) Hard duty

**Standard Steering Axis Inclination (Unloaded Vehicle):**

Vehicle Model	Grade	Seating Capacity	Item	Steering Axis Inclination
KDJ150L-GKAEY	TX	5 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)
		7 - Seater	-	11°49' +/-45' (11.82° +/-0.75°)
			for Double Tank Type	11°48' +/-45' (11.81° +/-0.75°)
		9 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)
	TXL	5 - Seater	-	11°47' +/-45' (11.78° +/-0.75°)
			for Double Tank Type	11°46' +/-45' (11.77° +/-0.75°)
		7 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)
			for Double Tank Type	11°47' +/-45' (11.79° +/-0.75°)



	VX	9 - Seater	-	11°47' +/-45' (11.78° +/-0.75°)	
			for Double Tank Type	11°46' +/-45' (11.77° +/-0.75°)	
		5 - Seater	-	11°55' +/-45' (11.91° +/-0.75°)	
			for Double Tank Type	11°54' +/-45' (11.90° +/-0.75°)	
		7 - Seater	-	11°56' +/-45' (11.93° +/-0.75°)	
			for Double Tank Type	11°55' +/-45' (11.92° +/-0.75°)	
	VXL	7 - Seater	-	11°55' +/-45' (11.92° +/-0.75°)	
			for Double Tank Type	11°55' +/-45' (11.91° +/-0.75°)	
	KDJ150L-GKFEY	TX	5 - Seater	-	11°46' +/-45' (11.77° +/-0.75°)
				for Double Tank Type	11°46' +/-45' (11.76° +/-0.75°)
			7 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)
				for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)
9 - Seater			-	11°46' +/-45' (11.77° +/-0.75°)	
			for Double Tank Type	11°46' +/-45' (11.76° +/-0.75°)	
TXL		5 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)	
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)	
		7 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)	
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)	
		9 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)	
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)	
VX		5 - Seater	-	11°53' +/-45' (11.89° +/-0.75°)	
			for Double Tank Type	11°53' +/-45' (11.88° +/-0.75°)	
		7 - Seater	-	11°55' +/-45' (11.91° +/-0.75°)	
			for Double Tank Type	11°54' +/-45' (11.90° +/-0.75°)	
VXL		7 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)	
			for Double Tank Type	11°53' +/-45' (11.89° +/-0.75°)	
KDJ150R-GKAEY		TX	5 - Seater	-	11°49' +/-45' (11.81° +/-0.75°)
				for Double Tank Type	11°48' +/-45' (11.80° +/-0.75°)
			7 - Seater	-	11°50' +/-45' (11.83° +/-0.75°)
				for Double Tank Type	11°49' +/-45' (11.82° +/-0.75°)
			9 - Seater	-	11°49' +/-45' (11.81° +/-0.75°)
				for Double Tank Type	11°48' +/-45' (11.80° +/-0.75°)
	TXL	5 - Seater	-	11°50' +/-45' (11.83° +/-0.75°)	
			for Double Tank Type	11°49' +/-45' (11.82° +/-0.75°)	
		7 - Seater	-	11°51' +/-45' (11.85° +/-0.75°)	
			for Double Tank Type	11°51' +/-45' (11.84° +/-0.75°)	
		9 - Seater	-	11°50' +/-45' (11.83° +/-0.75°)	
			for Double Tank Type	11°49' +/-45' (11.82° +/-0.75°)	
		5 - Seater	-	11°55' +/-45' (11.91° +/-0.75°)	
				11°54' +/-45'	

	VX	7 - Seater		for Double Tank Type	(11.90° +/-0.75°)
			-		11°56' +/-45' (11.93° +/-0.75°)
	VXL	7 - Seater		for Double Tank Type	11°55' +/-45' (11.92° +/-0.75°)
			-		11°55' +/-45' (11.92° +/-0.75°)
KDJ150R-GKFEY	TX	5 - Seater		for Double Tank Type	11°49' +/-45' (11.82° +/-0.75°)
			-		11°49' +/-45' (11.81° +/-0.75°)
		7 - Seater		for Double Tank Type	11°51' +/-45' (11.85° +/-0.75°)
			-		11°50' +/-45' (11.83° +/-0.75°)
	TXL	5 - Seater		for Double Tank Type	11°46' +/-45' (11.76° +/-0.75°)
			-		11°45' +/-45' (11.75° +/-0.75°)
		7 - Seater		for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)
			-		11°46' +/-45' (11.77° +/-0.75°)
	VX	5 - Seater		for Double Tank Type	11°55' +/-45' (11.91° +/-0.75°)
			-		11°54' +/-45' (11.90° +/-0.75°)
		7 - Seater		for Double Tank Type	11°56' +/-45' (11.93° +/-0.75°)
			-		11°55' +/-45' (11.92° +/-0.75°)
VXL	7 - Seater		for Double Tank Type	11°55' +/-45' (11.92° +/-0.75°)	
		-		11°55' +/-45' (11.91° +/-0.75°)	
GRJ150L-GKAEK	TX	5 - Seater		for Double Tank Type	11°45' +/-45' (11.74° +/-0.75°)
			-		11°44' +/-45' (11.73° +/-0.75°)
		7 - Seater		for Double Tank Type	11°46' +/-45' (11.77° +/-0.75°)
			-		11°45' +/-45' (11.76° +/-0.75°)
		9 - Seater		for Double Tank Type	11°45' +/-45' (11.74° +/-0.75°)
			-		11°44' +/-45' (11.73° +/-0.75°)
	TXL	5 - Seater		for Double Tank Type	11°46' +/-45' (11.77° +/-0.75°)
			-		11°45' +/-45' (11.76° +/-0.75°)
		7 - Seater		for Double Tank Type	11°47' +/-45' (11.79° +/-0.75°)
			-		11°47' +/-45' (11.78° +/-0.75°)
		9 - Seater		for Double Tank Type	11°46' +/-45' (11.77° +/-0.75°)
			-		11°45' +/-45' (11.76° +/-0.75°)
	VX	5 - Seater		for Double Tank Type	11°52' +/-45' (11.87° +/-0.75°)
			-		11°51' +/-45' (11.86° +/-0.75°)
		7 - Seater		for Double Tank Type	11°53' +/-45' (11.89° +/-0.75°)
			-		11°53' +/-45' (11.88° +/-0.75°)
VXL	7 - Seater		for Double Tank Type	11°53' +/-45' (11.88° +/-0.75°)	
		-		11°52' +/-45' (11.87° +/-0.75°)	
		5 - Seater		for Double Tank Type	11°44' +/-45' (11.73° +/-0.75°)
			-		11°43' +/-45' (11.72° +/-0.75°)

GRJ150L-GKFEK	TX	7 - Seater		(11.75° +/-0.75°)	
			for Double Tank Type	11°45' +/-45' (11.74° +/-0.75°)	
	9 - Seater			11°44' +/-45' (11.73° +/-0.75°)	
			for Double Tank Type	11°43' +/-45' (11.72° +/-0.75°)	
	TXL	5 - Seater			11°45' +/-45' (11.75° +/-0.75°)
				for Double Tank Type	11°45' +/-45' (11.74° +/-0.75°)
		7 - Seater			11°47' +/-45' (11.78° +/-0.75°)
				for Double Tank Type	11°46' +/-45' (11.76° +/-0.75°)
		9 - Seater			11°45' +/-45' (11.75° +/-0.75°)
				for Double Tank Type	11°45' +/-45' (11.74° +/-0.75°)
	VX	5 - Seater			11°55' +/-45' (11.91° +/-0.75°)
				for Double Tank Type	11°54' +/-45' (11.90° +/-0.75°)
7 - Seater				11°56' +/-45' (11.93° +/-0.75°)	
			for Double Tank Type	11°55' +/-45' (11.92° +/-0.75°)	
VXL	7 - Seater			11°55' +/-45' (11.92° +/-0.75°)	
			for Double Tank Type	11°55' +/-45' (11.91° +/-0.75°)	
LJ150L-GKMEE	TX	5 - Seater		11°45' +/-45' (11.76° +/-0.75°)	
			for Double Tank Type	11°45' +/-45' (11.75° +/-0.75°)	
		7 - Seater			11°47' +/-45' (11.78° +/-0.75°)
				for Double Tank Type	11°46' +/-45' (11.77° +/-0.75°)
		9 - Seater			11°45' +/-45' (11.76° +/-0.75°)
				for Double Tank Type	11°45' +/-45' (11.75° +/-0.75°)
	TXL	5 - Seater			11°46' +/-45' (11.77° +/-0.75°)
				for Double Tank Type	11°46' +/-45' (11.76° +/-0.75°)
		7 - Seater			11°48' +/-45' (11.80° +/-0.75°)
				for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)
		9 - Seater			11°46' +/-45' (11.77° +/-0.75°)
				for Double Tank Type	11°46' +/-45' (11.76° +/-0.75°)
LJ150R-GKMEE	TX	5 - Seater		11°47' +/-45' (11.79° +/-0.75°)	
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)	
		7 - Seater			11°49' +/-45' (11.81° +/-0.75°)
				for Double Tank Type	11°48' +/-45' (11.80° +/-0.75°)
		9 - Seater			11°47' +/-45' (11.79° +/-0.75°)
				for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)
	TXL	5 - Seater			11°48' +/-45' (11.80° +/-0.75°)
				for Double Tank Type	11°47' +/-45' (11.79° +/-0.75°)
		7 - Seater			11°49' +/-45' (11.82° +/-0.75°)
				for Double Tank Type	11°49' +/-45' (11.81° +/-0.75°)
		9 - Seater			11°48' +/-45' (11.80° +/-0.75°)
				for Double Tank Type	11°48' +/-45' (11.80° +/-0.75°)

TRJ150L-GKPEK	TX	5 - Seater	-	11°46' +/-45' (11.77° +/-0.75°)
			for Double Tank Type	11°46' +/-45' (11.76° +/-0.75°)
		7 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)
			for Double Tank Type	11°47' +/-45' (11.79° +/-0.75°)
		9 - Seater	-	11°46' +/-45' (11.77° +/-0.75°)
			-	11°46' +/-45' (11.77° +/-0.75°)
	TXL	5 - Seater	-	11°47' +/-45' (11.79° +/-0.75°)
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)
		7 - Seater	-	11°49' +/-45' (11.81° +/-0.75°)
for Double Tank Type	11°48' +/-45' (11.80° +/-0.75°)			
9 - Seater	-	11°47' +/-45' (11.79° +/-0.75°)		
	-	11°47' +/-45' (11.79° +/-0.75°)		
TRJ150L-GKMEK	TX	5 - Seater	-	11°46' +/-45' (11.77° +/-0.75°)
			for Double Tank Type	11°46' +/-45' (11.76° +/-0.75°)
		7 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)
			for Double Tank Type	11°47' +/-45' (11.79° +/-0.75°)
	TXL	5 - Seater	-	11°47' +/-45' (11.79° +/-0.75°)
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)
		7 - Seater	-	11°49' +/-45' (11.81° +/-0.75°)
			for Double Tank Type	11°48' +/-45' (11.80° +/-0.75°)
			-	11°48' +/-45' (11.80° +/-0.75°)
TRJ150R-GKMEK	TX	5 - Seater	-	11°45' +/-45' (11.76° +/-0.75°)
			for Double Tank Type	11°45' +/-45' (11.74° +/-0.75°)
		7 - Seater	-	11°47' +/-45' (11.78° +/-0.75°)
			for Double Tank Type	11°46' +/-45' (11.77° +/-0.75°)
	TXL	5 - Seater	-	11°46' +/-45' (11.77° +/-0.75°)
			for Double Tank Type	11°45' +/-45' (11.76° +/-0.75°)
		7 - Seater	-	11°47' +/-45' (11.79° +/-0.75°)
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)
KDJ150L-GKAEYW	TX	2 - Seater	-	11°51' +/-45' (11.85° +/-0.75°)
			for Cold Area	11°53' +/-45' (11.89° +/-0.75°)
		5 - Seater	-	11°53' +/-45' (11.88° +/-0.75°)
			for Cold Area	11°55' +/-45' (11.91° +/-0.75°)
			Spare Tire Less	11°51' +/-45' (11.85° +/-0.75°)
		7 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)
			for Cold Area	11°56' +/-45' (11.94° +/-0.75°)
			-	11°52' +/-45' (11.87° +/-0.75°)
	TXL	2 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)
			for Cold Area	11°54' +/-45' (11.90° +/-0.75°)
		5 - Seater	-	11°54' +/-45' (11.89° +/-0.75°)
			for Cold Area	11°56' +/-45' (11.93° +/-0.75°)
		7 - Seater	-	11°55' +/-45' (11.91° +/-0.75°)
			for Cold Area	11°57' +/-45' (11.95° +/-0.75°)
				11°54' +/-45'

KDJ150L-GKFEYW	VX	5 - Seater	-	(11.90° +/-0.75°)	
			for Cold Area	11°54' +/-45' (11.90° +/-0.75°)	
		7 - Seater	-	11°55' +/-45' (11.92° +/-0.75°)	
			for Cold Area	11°56' +/-45' (11.93° +/-0.75°)	
	VXL	5 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)	
			for Cold Area	11°54' +/-45' (11.90° +/-0.75°)	
		7 - Seater	-	11°55' +/-45' (11.92° +/-0.75°)	
			for Cold Area	11°56' +/-45' (11.93° +/-0.75°)	
	KDJ150R-GKAEYW	TX	2 - Seater	-	11°50' +/-45' (11.83° +/-0.75°)
				for Cold Area	11°52' +/-45' (11.86° +/-0.75°)
			5 - Seater	-	11°52' +/-45' (11.86° +/-0.75°)
				for Cold Area	11°54' +/-45' (11.90° +/-0.75°)
Spare Tire Less				11°50' +/-45' (11.84° +/-0.75°)	
7 - Seater			-	11°53' +/-45' (11.88° +/-0.75°)	
		for Cold Area	11°55' +/-45' (11.92° +/-0.75°)		
TXL		2 - Seater	-	11°51' +/-45' (11.85° +/-0.75°)	
			for Cold Area	11°53' +/-45' (11.89° +/-0.75°)	
		5 - Seater	-	11°53' +/-45' (11.88° +/-0.75°)	
			for Cold Area	11°55' +/-45' (11.92° +/-0.75°)	
		7 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)	
	for Cold Area		11°56' +/-45' (11.94° +/-0.75°)		
VX	5 - Seater	-	11°52' +/-45' (11.87° +/-0.75°)		
		for Cold Area	11°53' +/-45' (11.88° +/-0.75°)		
	7 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)		
		for Cold Area	11°54' +/-45' (11.90° +/-0.75°)		
VXL	5 - Seater	-	11°53' +/-45' (11.88° +/-0.75°)		
		for Cold Area	11°53' +/-45' (11.89° +/-0.75°)		
	7 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)		
		for Cold Area	11°55' +/-45' (11.91° +/-0.75°)		
KDJ150R-GKAEYW	TX	2 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)	
			for Cold Area	11°50' +/-45' (11.83° +/-0.75°)	
		5 - Seater	-	11°56' +/-45' (11.93° +/-0.75°)	
			for Cold Area	11°51' +/-45' (11.86° +/-0.75°)	
			Spare Tire Less	11°54' +/-45' (11.90° +/-0.75°)	
		7 - Seater	-	11°57' +/-45' (11.96° +/-0.75°)	
	for Cold Area		11°53' +/-45' (11.88° +/-0.75°)		
	TXL	2 - Seater	-	11°56' +/-45' (11.93° +/-0.75°)	
			for Cold Area	11°50' +/-45' (11.84° +/-0.75°)	
		5 - Seater	-	11°57' +/-45' (11.96° +/-0.75°)	
			for Cold Area	11°53' +/-45'	

KDJ150R-GKFEYW	VX	7 - Seater	-	(11.88° +/-0.75°)	
			for Cold Area	11°59' +/-45' (11.98° +/-0.75°)	
		5 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)	
			for Cold Area	11°55' +/-45' (11.92° +/-0.75°)	
		7 - Seater	-	11°55' +/-45' (11.92° +/-0.75°)	
			for Cold Area	11°56' +/-45' (11.94° +/-0.75°)	
	VXL	5 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)	
			for Cold Area	11°55' +/-45' (11.92° +/-0.75°)	
		7 - Seater	-	11°55' +/-45' (11.92° +/-0.75°)	
			for Cold Area	11°56' +/-45' (11.94° +/-0.75°)	
		TX	2 - Seater	-	11°53' +/-45' (11.88° +/-0.75°)
				for Cold Area	11°48' +/-45' (11.81° +/-0.75°)
5 - Seater	-		11°55' +/-45' (11.91° +/-0.75°)		
	for Cold Area		11°50' +/-45' (11.83° +/-0.75°)		
	Spare Tire Less		11°53' +/-45' (11.89° +/-0.75°)		
7 - Seater	-		11°56' +/-45' (11.93° +/-0.75°)		
	for Cold Area	11°51' +/-45' (11.86° +/-0.75°)			
TXL	2 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)		
		for Cold Area	11°50' +/-45' (11.83° +/-0.75°)		
	5 - Seater	-	11°56' +/-45' (11.94° +/-0.75°)		
		for Cold Area	11°52' +/-45' (11.86° +/-0.75°)		
	7 - Seater	-	11°57' +/-45' (11.95° +/-0.75°)		
		for Cold Area	11°52' +/-45' (11.87° +/-0.75°)		
VX	5 - Seater	-	11°53' +/-45' (11.88° +/-0.75°)		
		for Cold Area	11°54' +/-45' (11.90° +/-0.75°)		
	7 - Seater	-	11°54' +/-45' (11.90° +/-0.75°)		
		for Cold Area	11°55' +/-45' (11.92° +/-0.75°)		
VXL	5 - Seater	-	11°53' +/-45' (11.88° +/-0.75°)		
		for Cold Area	11°54' +/-45' (11.90° +/-0.75°)		
	7 - Seater	-	11°54' +/-45' (11.91° +/-0.75°)		
		for Cold Area	11°55' +/-45' (11.92° +/-0.75°)		
GRJ150L-GKAEKW	TX	2 - Seater	-	11°51' +/-45' (11.85° +/-0.75°)	
		5 - Seater	-	11°50' +/-45' (11.84° +/-0.75°)	
		7 - Seater	-	12°4' +/-45' (12.06° +/-0.75°) (*1) 11°51' +/-45' (11.86° +/-0.75°) (*2)	
	TXL	2 - Seater	-	11°51' +/-45' (11.85° +/-0.75°)	
		5 - Seater	-	11°52' +/-45' (11.86° +/-0.75°) (*1)	
			-	12°4' +/-45' (12.07° +/-0.75°) (*2)	
				12°6' +/-45' (12.09°)	

		7 - Seater	-	+/-0.75°)	
	VX	5 - Seater	-	12°4' +/-45' (12.06° +/-0.75°)	
		7 - Seater	-	12°5' +/-45' (12.08° +/-0.75°)	
	VXL	5 - Seater	-	12°4' +/-45' (12.06° +/-0.75°)	
		7 - Seater	-	12°5' +/-45' (12.08° +/-0.75°)	
GRJ150R-GKAEKW	TX	2 - Seater	-	12°2' +/-45' (12.03° +/-0.75°)	
		5 - Seater	-	12°2' +/-45' (12.04° +/-0.75°)	
		7 - Seater	-	11°51' +/-45' (11.86° +/-0.75°) (*1) 12°4' +/-45' (12.06° +/-0.75°) (*2)	
	TXL	2 - Seater	-	12°3' +/-45' (12.06° +/-0.75°)	
		5 - Seater	-	12°4' +/-45' (12.07° +/-0.75°)	
		7 - Seater	-	11°53' +/-45' (11.89° +/-0.75°) (*1) 12°6' +/-45' (12.09° +/-0.75°) (*2)	
	VX	5 - Seater	-	11°60' +/-45' (12.00° +/-0.75°) (*1) 11°48' +/-45' (11.80° +/-0.75°) (*2)	
		7 - Seater	-	11°49' +/-45' (11.82° +/-0.75°)	
	VXL	5 - Seater	-	11°60' +/-45' (12.00° +/-0.75°) (*1) 11°48' +/-45' (11.80° +/-0.75°) (*2)	
		7 - Seater	-	11°49' +/-45' (11.82° +/-0.75°)	
	KDJ155L-GJAEYW	TX	2 - Seater	-	12°5' +/-45' (12.09° +/-0.75°) (*1) 11°54' +/-45' (11.90° +/-0.75°) (*2)
				for Cold Area	12°3' +/-45' (12.06° +/-0.75°) (*1) 11°51' +/-45' (11.84° +/-0.75°) (*2)
5 - Seater			-	12°8' +/-45' (12.14° +/-0.75°) (*1) 11°57' +/-45' (11.95° +/-0.75°) (*2)	
			for Cold Area	12°6' +/-45' (12.10° +/-0.75°) (*1) 11°53' +/-45' (11.89° +/-0.75°) (*2)	
			Spare Tire Less	12°7' +/-45' (12.12° +/-0.75°) (*1)	
			Spare Tire Less for Cold Area	12°5' +/-45' (12.09° +/-0.75°)	
2 - Seater		-	12°6' +/-45' (12.10° +/-0.75°) (*1) 11°55' +/-45' (11.92° +/-0.75°) (*2)		
		for Cold Area	12°4' +/-45' (12.07° +/-0.75°) (*1) 11°51' +/-45' (11.86° +/-0.75°) (*2)		
		TXL	-	12°10' +/-45' (12.16° +/-0.75°) (*1) 11°58' +/-45' (11.97° +/-0.75°) (*2)	
				12°7' +/-45' (12.12°	

KDJ155L-GJFEYW	VX	5 - Seater	for Cold Area	+/-0.75°) (*1) 11°54' +/-45' (11.91° +/-0.75°) (*2)
			Spare Tire Less	12°9' +/-45' (12.15° +/-0.75°)
			Spare Tire Less for Cold Area	12°7' +/-45' (12.11° +/-0.75°)
		5 - Seater	-	12°14' +/-45' (12.23° +/-0.75°) (*1) 12°2' +/-45' (12.03° +/-0.75°) (*2)
			for Cold Area	12°11' +/-45' (12.19° +/-0.75°) (*1) 11°58' +/-45' (11.96° +/-0.75°) (*2)
			Spare Tire Less	12°13' +/-45' (12.21° +/-0.75°)
	TX	2 - Seater	-	12°4' +/-45' (12.06° +/-0.75°) (*1) 11°53' +/-45' (11.88° +/-0.75°) (*2)
			for Cold Area	12°10' +/-45' (12.16° +/-0.75°) (*1) 11°58' +/-45' (11.97° +/-0.75°) (*2)
			-	12°7' +/-45' (12.11° +/-0.75°) (*1) 11°55' +/-45' (11.92° +/-0.75°) (*2)
		5 - Seater	for Cold Area	12°13' +/-45' (12.22° +/-0.75°) (*1) 12°1' +/-45' (12.02° +/-0.75°) (*2)
			Spare Tire Less	12°6' +/-45' (12.10° +/-0.75°)
			Spare Tire Less for Cold Area	12°12' +/-45' (12.20° +/-0.75°)
TXL	2 - Seater	-	12°5' +/-45' (12.09° +/-0.75°) (*1) 11°54' +/-45' (11.90° +/-0.75°) (*2)	
		for Cold Area	12°3' +/-45' (12.06° +/-0.75°) (*1) 11°51' +/-45' (11.84° +/-0.75°) (*2)	
		-	12°8' +/-45' (12.14° +/-0.75°) (*1) 11°57' +/-45' (11.95° +/-0.75°) (*2)	
	5 - Seater	for Cold Area	12°6' +/-45' (12.10° +/-0.75°) (*1) 11°53' +/-45' (11.89° +/-0.75°) (*2)	
		Spare Tire Less	12°7' +/-45' (12.12° +/-0.75°)	
		Spare Tire Less for Cold Area	12°5' +/-45' (12.09° +/-0.75°)	
VX	5 - Seater	-	12°12' +/-45' (12.20° +/-0.75°) (*1) 12°0' +/-45' (12.00° +/-0.75°) (*2)	
		for Cold Area	12°10' +/-45' (12.16° +/-0.75°) (*1) 11°56' +/-45' (11.94° +/-0.75°) (*2)	
		Spare Tire Less	12°11' +/-45' (12.18° +/-0.75°)	



KDJ155R-GJAEYW	TX	2 - Seater	Spare Tire Less for Cold Area	12°9' +/-45' (12.14° +/-0.75°)
			-	12°11' +/-45' (12.19° +/-0.75°) (*1) 11°58' +/-45' (11.97° +/-0.75°) (*2)
		5 - Seater	for Cold Area	12°9' +/-45' (12.15° +/-0.75°)
			-	12°14' +/-45' (12.23° +/-0.75°) (*1) 12°0' +/-45' (12.01° +/-0.75°) (*2)
			for Cold Area	12°12' +/-45' (12.19° +/-0.75°)
			Spare Tire Less	12°13' +/-45' (12.22° +/-0.75°)
	Spare Tire Less for Cold Area	12°11' +/-45' (12.19° +/-0.75°)		
	TXL	2 - Seater	-	12°13' +/-45' (12.22° +/-0.75°) (*1) 11°60' +/-45' (12.00° +/-0.75°) (*2)
			for Cold Area	12°10' +/-45' (12.16° +/-0.75°)
		5 - Seater	-	12°16' +/-45' (12.26° +/-0.75°) (*1) 12°2' +/-45' (12.04° +/-0.75°) (*2)
			for Cold Area	12°13' +/-45' (12.22° +/-0.75°)
			Spare Tire Less	12°15' +/-45' (12.24° +/-0.75°)
Spare Tire Less for Cold Area			12°12' +/-45' (12.21° +/-0.75°)	
VX	5 - Seater	-	12°8' +/-45' (12.13° +/-0.75°) (*1) 11°58' +/-45' (11.96° +/-0.75°) (*2)	
		for Cold Area	12°6' +/-45' (12.09° +/-0.75°)	
		Spare Tire Less	12°7' +/-45' (12.12° +/-0.75°)	
		Spare Tire Less for Cold Area	12°5' +/-45' (12.08° +/-0.75°)	
KDJ155R-GJFEYW	TX	2 - Seater	-	12°9' +/-45' (12.15° +/-0.75°) (*1) 11°56' +/-45' (11.94° +/-0.75°) (*2)
			for Cold Area	12°7' +/-45' (12.12° +/-0.75°)
		5 - Seater	-	12°12' +/-45' (12.21° +/-0.75°) (*1) 11°59' +/-45' (11.99° +/-0.75°) (*2)
			for Cold Area	12°10' +/-45' (12.17° +/-0.75°)
	Spare Tire Less		12°11' +/-45' (12.19° +/-0.75°)	
	Spare Tire Less for Cold Area	12°9' +/-45' (12.16° +/-0.75°)		
	TXL	2 - Seater	-	12°11' +/-45' (12.19° +/-0.75°) (*1) 11°58' +/-45' (11.97° +/-0.75°) (*2)
			for Cold Area	12°9' +/-45' (12.15° +/-0.75°)
		5 - Seater	-	12°14' +/-45' (12.24° +/-0.75°) (*1) 12°1' +/-45' (12.01° +/-0.75°) (*2)
			for Cold Area	12°12' +/-45'
Spare Tire Less			12°11' +/-45'	
Spare Tire Less for Cold Area			12°12' +/-45'	

		5 - Seater	for Cold Area	(12.20° +/-0.75°)	
			Spare Tire Less	12° 13' +/-45' (12.21° +/-0.75°)	
			Spare Tire Less for Cold Area	12° 11' +/-45' (12.18° +/-0.75°)	
		VX	5 - Seater	-	12° 6' +/-45' (12.10° +/-0.75°) (*1) 11° 56' +/-45' (11.93° +/-0.75°) (*2)
				for Cold Area	12° 16' +/-45' (12.26° +/-0.75°)
				Spare Tire Less	12° 5' +/-45' (12.09° +/-0.75°)
	KDJ150R-GKAEYQ	TX	5 - Seater	-	11° 44' +/-45' (11.73° +/-0.75°)
				for Double Tank Type	11° 43' +/-45' (11.72° +/-0.75°)
			7 - Seater	-	11° 45' +/-45' (11.75° +/-0.75°)
				for Double Tank Type	11° 44' +/-45' (11.74° +/-0.75°)
		TXL	7 - Seater	-	11° 46' +/-45' (11.77° +/-0.75°)
				for Double Tank Type	11° 46' +/-45' (11.76° +/-0.75°)
VX		7 - Seater	-	11° 56' +/-45' (11.93° +/-0.75°)	
			for Double Tank Type	11° 55' +/-45' (11.92° +/-0.75°)	
VXL		7 - Seater	-	11° 54' +/-45' (11.90° +/-0.75°)	
			for Double Tank Type	11° 57' +/-45' (11.95° +/-0.75°)	
KDJ150R-GKFEYQ		TX	5 - Seater	-	11° 49' +/-45' (11.82° +/-0.75°)
				for Double Tank Type	11° 48' +/-45' (11.81° +/-0.75°)
	7 - Seater		-	11° 44' +/-45' (11.74° +/-0.75°)	
			for Double Tank Type	11° 44' +/-45' (11.73° +/-0.75°)	
	TXL	7 - Seater	-	11° 52' +/-45' (11.86° +/-0.75°)	
			for Double Tank Type	11° 51' +/-45' (11.85° +/-0.75°)	
	VX	7 - Seater	-	11° 55' +/-45' (11.91° +/-0.75°)	
			for Double Tank Type	11° 54' +/-45' (11.90° +/-0.75°)	
	VXL	7 - Seater	-	11° 56' +/-45' (11.93° +/-0.75°)	
			for Double Tank Type	11° 55' +/-45' (11.92° +/-0.75°)	
	GRJ150R-GKAQKQ	TX	5 - Seater	-	11° 44' +/-45' (11.74° +/-0.75°)
				for Double Tank Type	11° 44' +/-45' (11.73° +/-0.75°)
7 - Seater			-	11° 46' +/-45' (11.76° +/-0.75°)	
			for Double Tank Type	11° 45' +/-45' (11.75° +/-0.75°)	
TXL		7 - Seater	-	11° 47' +/-45' (11.78° +/-0.75°)	
			for Double Tank Type	11° 46' +/-45' (11.77° +/-0.75°)	
VX		7 - Seater	-	11° 50' +/-45' (11.83° +/-0.75°)	
			for Double Tank Type	11° 49' +/-45' (11.82° +/-0.75°)	
VXL		7 - Seater	-	11° 51' +/-45' (11.86° +/-0.75°)	
			for Double Tank Type	11° 51' +/-45' (11.84° +/-0.75°)	
			5 - Seater	-	11° 43' +/-45' (11.72° +/-0.75°)

GRJ150R-GKFEKQ	TX		for Double Tank Type	11°43' +/-45' (11.72° +/-0.75°)	
		7 - Seater	-	11°45' +/-45' (11.74° +/-0.75°)	
	TXL	7 - Seater		for Double Tank Type	11°44' +/-45' (11.73° +/-0.75°)
				-	11°46' +/-45' (11.77° +/-0.75°)
	VX	7 - Seater		for Double Tank Type	11°45' +/-45' (11.76° +/-0.75°)
				-	11°49' +/-45' (11.81° +/-0.75°)
	VXL	7 - Seater		for Double Tank Type	11°48' +/-45' (11.80° +/-0.75°)
				-	11°50' +/-45' (11.83° +/-0.75°)
KDJ155R-GJAEYW	TX	5 - Seater	-	11°45' +/-45' (11.75° +/-0.75°)	
	TXL	5 - Seater	-	11°46' +/-45' (11.77° +/-0.75°)	
	VX	5 - Seater	-	11°50' +/-45' (11.83° +/-0.75°)	
KDJ150L-GKAEYV	TX	5 - Seater		11°48' +/-45' (11.80° +/-0.75°)	
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)	
		7 - Seater		11°49' +/-45' (11.82° +/-0.75°)	
			for Double Tank Type	11°48' +/-45' (11.81° +/-0.75°)	
		9 - Seater		11°48' +/-45' (11.80° +/-0.75°)	
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)	
	TXL	5 - Seater		11°48' +/-45' (11.80° +/-0.75°)	
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)	
		7 - Seater		11°51' +/-45' (11.85° +/-0.75°)	
			for Double Tank Type	11°50' +/-45' (11.84° +/-0.75°)	
		9 - Seater		11°48' +/-45' (11.80° +/-0.75°)	
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)	
	VX	7 - Seater		11°56' +/-45' (11.93° +/-0.75°)	
			for Double Tank Type	11°55' +/-45' (11.92° +/-0.75°)	
	VXL	7 - Seater		11°56' +/-45' (11.94° +/-0.75°)	
			for Double Tank Type	11°56' +/-45' (11.93° +/-0.75°)	
	KDJ150L-GKFEYV	TX	5 - Seater		11°46' +/-45' (11.77° +/-0.75°)
				for Double Tank Type	11°46' +/-45' (11.76° +/-0.75°)
7 - Seater				11°48' +/-45' (11.80° +/-0.75°)	
			for Double Tank Type	11°47' +/-45' (11.78° +/-0.75°)	
9 - Seater				11°46' +/-45' (11.77° +/-0.75°)	
			for Double Tank Type	11°46' +/-45' (11.76° +/-0.75°)	
TXL		5 - Seater		11°48' +/-45' (11.81° +/-0.75°)	
			for Double Tank Type	11°48' +/-45' (11.80° +/-0.75°)	
		7 - Seater		11°50' +/-45' (11.83° +/-0.75°)	
			for Double Tank Type	11°49' +/-45' (11.82° +/-0.75°)	
		9 - Seater		11°48' +/-45' (11.81° +/-0.75°)	
				11°48' +/-45'	

			for Double Tank Type	(11.80° +/-0.75°)	
	VX	7 - Seater	-	11°55' +/-45' (11.91° +/-0.75°)	
			for Double Tank Type	11°54' +/-45' (11.90° +/-0.75°)	
	VXL	7 - Seater	-	11°55' +/-45' (11.92° +/-0.75°)	
			for Double Tank Type	11°54' +/-45' (11.91° +/-0.75°)	
GRJ150L-GKAEKV	TX	5 - Seater	-	11°45' +/-45' (11.75° +/-0.75°)	
			for Double Tank Type	11°44' +/-45' (11.74° +/-0.75°)	
		7 - Seater	-	11°46' +/-45' (11.77° +/-0.75°)	
			for Double Tank Type	11°46' +/-45' (11.76° +/-0.75°)	
		9 - Seater	-	11°45' +/-45' (11.75° +/-0.75°)	
			for Double Tank Type	11°44' +/-45' (11.74° +/-0.75°)	
	TXL	5 - Seater	-	11°47' +/-45' (11.78° +/-0.75°)	
			for Double Tank Type	11°46' +/-45' (11.77° +/-0.75°)	
		7 - Seater	-	11°48' +/-45' (11.81° +/-0.75°)	
			for Double Tank Type	11°48' +/-45' (11.80° +/-0.75°)	
		9 - Seater	-	11°47' +/-45' (11.78° +/-0.75°)	
			for Double Tank Type	11°46' +/-45' (11.77° +/-0.75°)	
	VX	7 - Seater	-	11°53' +/-45' (11.89° +/-0.75°)	
			for Double Tank Type	11°53' +/-45' (11.88° +/-0.75°)	
	VXL	7 - Seater	-	11°54' +/-45' (11.89° +/-0.75°)	
			for Double Tank Type	11°53' +/-45' (11.88° +/-0.75°)	
	GRJ150L-GKFEKV	TX	5 - Seater	-	11°44' +/-45' (11.73° +/-0.75°)
				for Double Tank Type	11°43' +/-45' (11.72° +/-0.75°)
7 - Seater			-	11°45' +/-45' (11.75° +/-0.75°)	
			for Double Tank Type	11°44' +/-45' (11.74° +/-0.75°)	
9 - Seater			-	11°44' +/-45' (11.73° +/-0.75°)	
			for Double Tank Type	11°43' +/-45' (11.72° +/-0.75°)	
TXL		5 - Seater	-	11°46' +/-45' (11.76° +/-0.75°)	
			for Double Tank Type	11°45' +/-45' (11.75° +/-0.75°)	
		7 - Seater	-	11°47' +/-45' (11.78° +/-0.75°)	
			for Double Tank Type	11°46' +/-45' (11.77° +/-0.75°)	
		9 - Seater	-	11°46' +/-45' (11.76° +/-0.75°)	
			for Double Tank Type	11°45' +/-45' (11.75° +/-0.75°)	
VX		7 - Seater	-	11°52' +/-45' (11.87° +/-0.75°)	
			for Double Tank Type	11°51' +/-45' (11.86° +/-0.75°)	
VXL		7 - Seater	-	11°52' +/-45' (11.87° +/-0.75°)	
			for Double Tank Type	11°52' +/-45' (11.86° +/-0.75°)	
TX		5 - Seater	-	11°47' +/-45' (11.79° +/-0.75°)	
		7 - Seater	-	11°49' +/-45' (11.81° +/-0.75°)	
	9 - Seater	-	11°47' +/-45'		

TRJ150L-GKPEKV	TXL	5 - Seater	-	(11.79° +/-0.75°)
		7 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)
		9 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)
TRJ150L-GKMEKV	TX	5 - Seater	-	11°46' +/-45' (11.76° +/-0.75°)
		7 - Seater	-	11°47' +/-45' (11.79° +/-0.75°)
		9 - Seater	-	11°46' +/-45' (11.76° +/-0.75°)
	TXL	5 - Seater	-	11°47' +/-45' (11.78° +/-0.75°)
		7 - Seater	-	11°48' +/-45' (11.80° +/-0.75°)
		9 - Seater	-	11°47' +/-45' (11.78° +/-0.75°)
TRJ155L-GKPEKV	TX	5 - Seater	-	11°46' +/-45' (11.77° +/-0.75°)
	TXL	5 - Seater	-	11°47' +/-45' (11.78° +/-0.75°)

(\*1) Light duty  
(\*2) Hard duty

**5. ADJUST CAMBER AND CASTER**


**HINT:**

After the camber has been adjusted, inspect the toe-in.

- a. Loosen the front adjusting cam bolt and rear adjusting cam nut.
- b. Turn the front adjusting cam and rear adjusting cam in both directions, and adjust the camber and caster to the center value.

**HINT:**

- The camber and caster should be as close as possible to the center value.
- Adjust the camber and caster within +/- 30'.

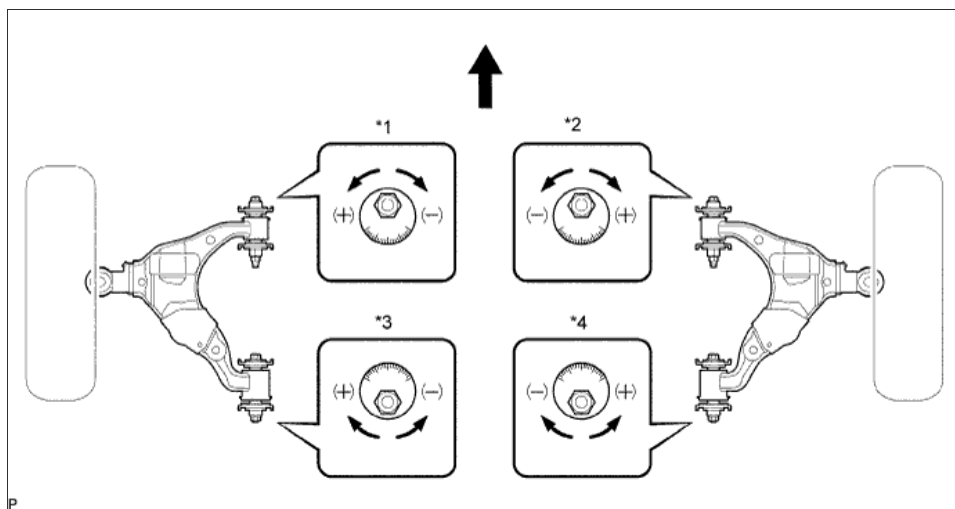

**Text in Illustration**

*1	Front Adjusting Cam LH	*2	Front Adjusting Cam RH
*3	Rear Adjusting Cam LH	*4	Rear Adjusting Cam RH
	Front	-	-

- c. Read the adjustment chart (example).

**Text in Illustration**

*1	Caster
----	--------

*2	Camber
*3	Front Adjusting Cam
*4	Rear Adjusting Cam
*a	Measured Value
*b	Standard Value

- i. Find the wheel alignment standard value applicable for the particular model.
- ii. Mark the selected standard value on the adjustment chart.

**Standard Value (Reference):**

Camber	Caster
0°00' (0.00°)	3°30' (3.50°)

- iii. Mark the alignment value measured when the vehicle is unloaded on the adjustment chart.


**Measured Value (Reference):**


Camber	Caster
-0°20' (-0.33°)	3°20' (3.33°)

- iv. As shown in the chart, read the distance from the marked point to 0, and adjust the front and/ or rear adjusting cams accordingly.

**Amount to Turn Adjusting Cams (by Gradation):**

Front Adjusting Cam	Rear Adjusting Cam
+3	+2

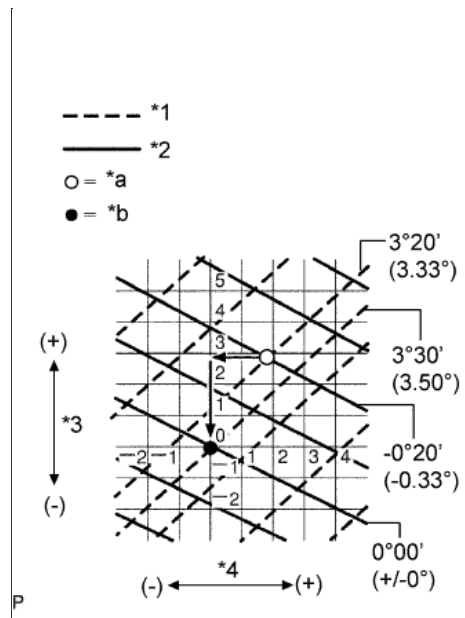

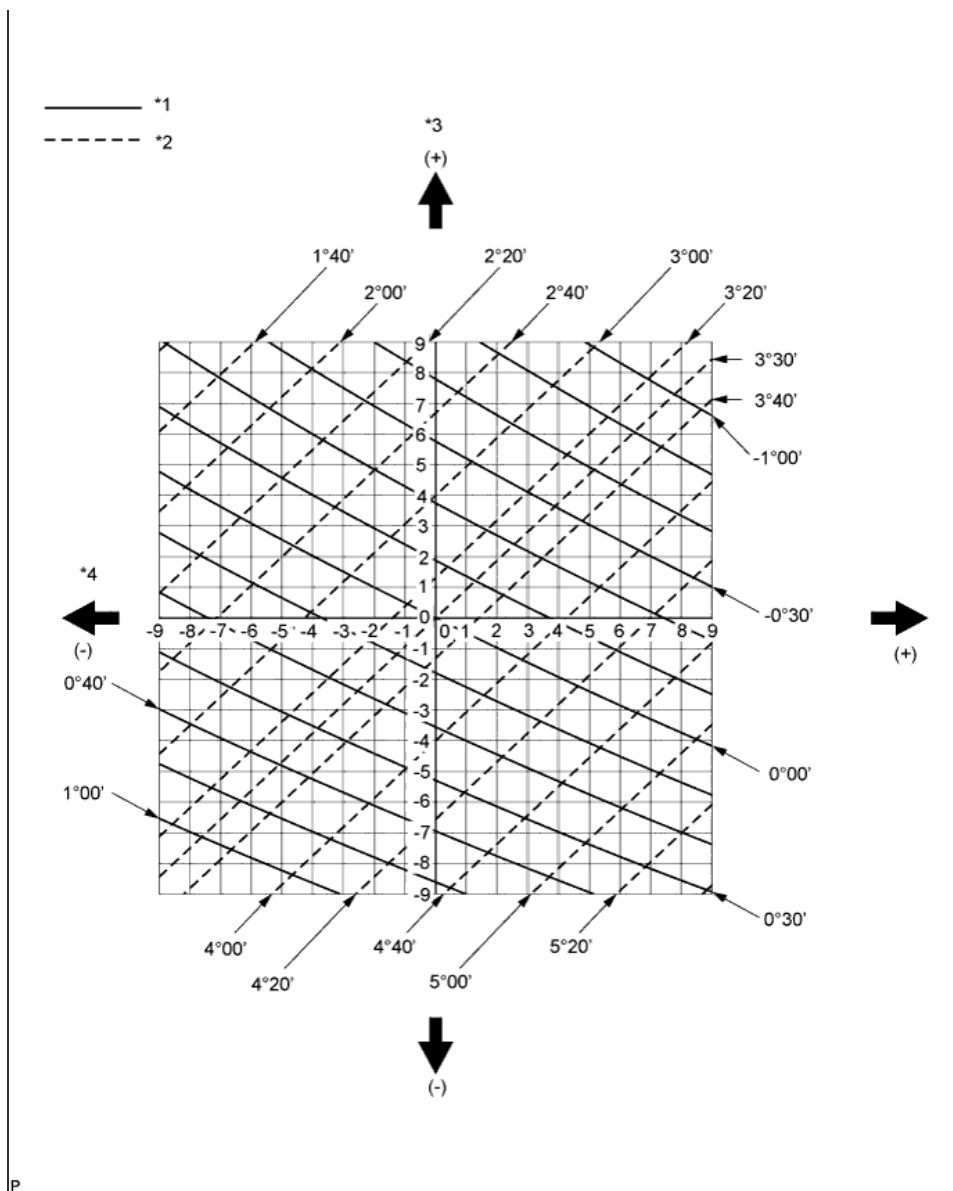


**Text in Illustration**

*1	Camber	*2	Caster
*3	Front Cam Graduation	*4	Rear Cam Graduation

**6. INSPECT TOE-IN**

- a. Bounce the vehicle up and down at the corners to stabilize the suspension and inspect the toe-in.

**Text in Illustration**

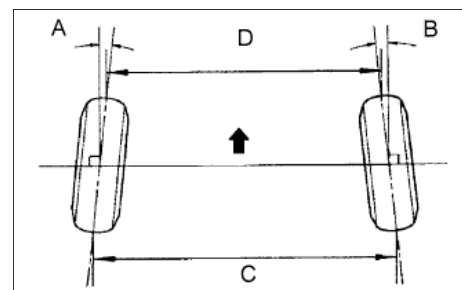

**Standard Toe-in (Unloaded Vehicle):**

Vehicle Model	Grade	Seating Capacity	Item	Toe-in
		5 - Seater		A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.5 +/- 2 mm (0.18 +/- 0.08 in.)
				A + B: 0°11' +/- 0°10' (0.17° +/-

KDJ150L-GKAEY	TX	7 - Seater	-	for Double Tank Type	0.16° C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)		
			-	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.2 +/-2 mm (0.17 +/-0.08 in.)		
		9 - Seater	-	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.4 +/-2 mm (0.17 +/-0.08 in.)		
			-	for Double Tank Type	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.5 +/-2 mm (0.18 +/-0.08 in.)		
		5 - Seater	-	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)		
			-	for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)		
	TXL	7 - Seater	-	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.4 +/-2 mm (0.17 +/-0.08 in.)		
			-	for Double Tank Type	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.6 +/-2 mm (0.18 +/-0.08 in.)		
		9 - Seater	-	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)		
			-	for Double Tank Type	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.9 +/-2 mm (0.19 +/-0.08 in.)		
		KDJ150L-GKAEY	VX	5 - Seater	-	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
					-	for Double Tank Type	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)
7 - Seater	-			-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.)		
	-			for Double Tank Type	A + B: 0°7' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)		
VXL	7 - Seater		-	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)		
			-	for Double Tank Type	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)		
KDJ150L-GKAEY		5 - Seater	-	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)		
			-	for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.0 +/-2 mm (0.20 +/-0.08 in.)		



KDJ150L-GKFEY	TX	7 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.5 +/-2 mm (0.18 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)		
		9 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.0 +/-2 mm (0.20 +/-0.08 in.)		
KDJ150L-GKFEY	TXL	5 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.5 +/-2 mm (0.18 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)		
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.5 +/-2 mm (0.18 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)		
		9 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.5 +/-2 mm (0.18 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)		
		VX	5 - Seater	-	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.2 +/-2 mm (0.13 +/-0.08 in.)	
				for Double Tank Type	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.3 +/-2 mm (0.13 +/-0.08 in.)	
			7 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)	
				for Double Tank Type	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)	
			VXL	7 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)
					for Double Tank Type	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.2 +/-2 mm (0.13 +/-0.08 in.)
		5 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.3 +/-2 mm (0.17 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.4 +/-2 mm (0.17 +/-0.08 in.)		
		-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°)			

KDJ150R-GKAEY	TX	7 - Seater		C - D: 4.0 +/-2 mm (0.16 +/-0.08 in.)
			for Double Tank Type	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.1 +/-2 mm (0.16 +/-0.08 in.)
		9 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.3 +/-2 mm (0.17 +/-0.08 in.)
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.4 +/-2 mm (0.17 +/-0.08 in.)
	TXL	5 - Seater	-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.0 +/-2 mm (0.16 +/-0.08 in.)
			for Double Tank Type	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.1 +/-2 mm (0.16 +/-0.08 in.)
		7 - Seater	-	A + B: 0°8' +/-0°10' (0.14° +/-0.16°) C - D: 3.7 +/-2 mm (0.15 +/-0.08 in.)
			for Double Tank Type	A + B: 0°9' +/-0°10' (0.14° +/-0.16°) C - D: 3.8 +/-2 mm (0.15 +/-0.08 in.)
		9 - Seater	-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.0 +/-2 mm (0.16 +/-0.08 in.)
			for Double Tank Type	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.1 +/-2 mm (0.16 +/-0.08 in.)
KDJ150R-GKAEY	VX	5 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
			for Double Tank Type	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)
		7 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.)
			for Double Tank Type	A + B: 0°7' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)
	VXL	7 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)
			for Double Tank Type	A + B: 0°7' +/-0°10' (0.10° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
KDJ150R-GKFEY	TX	5 - Seater	-	A + B: 0°10' +/- 0°10' (0.15° +/- 0.16°) C - D: 4.1 +/-2 mm (0.16 +/-0.08 in.)
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.3 +/-2 mm (0.17 +/-0.08 in.)
		7 - Seater	-	A + B: 0°9' +/-0°10' (0.14° +/-0.16°) C - D: 3.8 +/-2 mm (0.15 +/-0.08 in.)
			for Double Tank Type	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.0 +/-2 mm (0.16 +/-0.08 in.)
				-

	TXL	5 - Seater	-	(0.20 +/-0.08 in.)
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.2 +/-2 mm (0.20 +/-0.08 in.)
		7 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.9 +/-2 mm (0.19 +/-0.08 in.)
KDJ150R-GKFEY	VX	5 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
			for Double Tank Type	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)
		7 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.)
	for Double Tank Type		A + B: 0°7' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)	
	VXL	7 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)
			for Double Tank Type	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
GRJ150L-GKAEK	TX	5 - Seater	-	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.3 +/-2 mm (0.21 +/-0.08 in.)
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.4 +/-2 mm (0.21 +/-0.08 in.)
		7 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.9 +/-2 mm (0.19 +/-0.08 in.)
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.1 +/-2 mm (0.20 +/-0.08 in.)
		9 - Seater	-	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.3 +/-2 mm (0.21 +/-0.08 in.)
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.4 +/-2 mm (0.21 +/-0.08 in.)
	TXL	5 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.9 +/-2 mm (0.19 +/-0.08 in.)
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.1 +/-2 mm (0.20 +/-0.08 in.)
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.6 +/-2 mm (0.18 +/-0.08 in.)
				A + B: 0°11' +/-

GRJ150L-GKAEK	VX	9 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.1 +/-2 mm (0.20 +/-0.08 in.)	
		5 - Seater	-	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.5 +/-2 mm (0.14 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°9' +/-0°10' (0.14° +/-0.16°) C - D: 3.7 +/-2 mm (0.15 +/-0.08 in.)	
		7 - Seater	-	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.2 +/-2 mm (0.13 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.4 +/-2 mm (0.13 +/-0.08 in.)	
	VXL	7 - Seater	-	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.4 +/-2 mm (0.13 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.5 +/-2 mm (0.14 +/-0.08 in.)	
	GRJ150L-GKFEK	TX	5 - Seater	-	A + B: 0°13' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.5 +/-2 mm (0.22 +/-0.08 in.)
				for Double Tank Type	A + B: 0°13' +/- 0°10' (0.21° +/- 0.16°) C - D: 5.7 +/-2 mm (0.22 +/-0.08 in.)
			7 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.1 +/-2 mm (0.20 +/-0.08 in.)
				for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.3 +/-2 mm (0.21 +/-0.08 in.)
9 - Seater			-	A + B: 0°13' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.5 +/-2 mm (0.22 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°13' +/- 0°10' (0.21° +/- 0.16°) C - D: 5.7 +/-2 mm (0.22 +/-0.08 in.)	
TXL		5 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.1 +/-2 mm (0.20 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.3 +/-2 mm (0.21 +/-0.08 in.)	
			-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)	
		7 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.0 +/-2 mm	
			-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)	

				(0.20 +/-0.08 in.)	
		9 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.1 +/-2 mm (0.20 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.3 +/-2 mm (0.21 +/-0.08 in.)	
GRJ150L-GKFEK	VX	5 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)	
		7 - Seater	-	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°7' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)	
		VXL	7 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)
				for Double Tank Type	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
	LJ150L-GKMEE	TX	5 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.1 +/-2 mm (0.20 +/-0.08 in.)
				for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.2 +/-2 mm (0.20 +/-0.08 in.)
7 - Seater			-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.9 +/-2 mm (0.19 +/-0.08 in.)	
9 - Seater			-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.1 +/-2 mm (0.20 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.2 +/-2 mm (0.20 +/-0.08 in.)	
LJ150L-GKMEE	TXL	5 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.0 +/-2 mm (0.20 +/-0.08 in.)	
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.5 +/-2 mm (0.18 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)	
				A + B: 0°11' +/-	

		9 - Seater	-	0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.0 +/-2 mm (0.20 +/-0.08 in.)		
LJ150R-GKMEE	TX	5 - Seater	-	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.6 +/-2 mm (0.18 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)		
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.3 +/-2 mm (0.17 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.4 +/-2 mm (0.17 +/-0.08 in.)		
		9 - Seater	-	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.6 +/-2 mm (0.18 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)		
		LJ150R-GKMEE	TXL	5 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.4 +/-2 mm (0.17 +/-0.08 in.)
					for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.6 +/-2 mm (0.18 +/-0.08 in.)
7 - Seater	-			A + B: 0°10' +/- 0°10' (0.15° +/- 0.16°) C - D: 4.1 +/-2 mm (0.16 +/-0.08 in.)		
	for Double Tank Type			A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.3 +/-2 mm (0.17 +/-0.08 in.)		
9 - Seater	-			A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.4 +/-2 mm (0.17 +/-0.08 in.)		
	for Double Tank Type			A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.5 +/-2 mm (0.18 +/-0.08 in.)		
TRJ150L-GKPEK	TX	5 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.0 +/-2 mm (0.20 +/-0.08 in.)		
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.5 +/-2 mm (0.18 +/-0.08 in.)		
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°)		

				C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)
		9 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)
TRJ150L-GKPEK	TXL	5 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.6 +/-2 mm (0.18 +/-0.08 in.)
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.2 +/-2 mm (0.17 +/-0.08 in.)
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.4 +/-2 mm (0.17 +/-0.08 in.)
		9 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.6 +/-2 mm (0.18 +/-0.08 in.)
TRJ150L-GKMEK	TX	5 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.0 +/-2 mm (0.20 +/-0.08 in.)
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.5 +/-2 mm (0.18 +/-0.08 in.)
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.7 +/-2 mm (0.19 +/-0.08 in.)
	TXL	5 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.6 +/-2 mm (0.18 +/-0.08 in.)
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)
TXL	7 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.2 +/-2 mm (0.17 +/-0.08 in.)	
		for Double Tank Type	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.4 +/-2 mm (0.17 +/-0.08 in.)	
	5 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.1 +/-2 mm (0.20 +/-0.08 in.)	
		for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.3 +/-2 mm (0.21 +/-0.08 in.)	
			-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.8 +/-2 mm (0.19 +/-0.08 in.)

TRJ150R-GKMEK	TXL	7 - Seater		A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.9 +/-2 mm (0.19 +/-0.08 in.)
			for Double Tank Type	
		5 - Seater		A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.9 +/-2 mm (0.19 +/-0.08 in.)
			for Double Tank Type	
KDJ150L-GKAEYW	TX	2 - Seater		A + B: 0°8' +/-0°10' (0.14° +/-0.16°) C - D: 3.7 +/-2 mm (0.15 +/-0.08 in.)
			for Cold Area	
		5 - Seater		A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.4 +/-2 mm (0.13 +/-0.08 in.)
			for Cold Area	
KDJ150L-GKAEYW	TXL	7 - Seater		A + B: 0°8' +/-0°10' (0.14° +/-0.16°) C - D: 3.7 +/-2 mm (0.15 +/-0.08 in.)
			for Cold Area	
		2 - Seater		A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.4 +/-2 mm (0.13 +/-0.08 in.)
			for Cold Area	
KDJ150L-GKAEYW	VX	5 - Seater		A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)
			for Cold Area	
		7 - Seater		A + B: 0°7' +/-0°10' (0.10° +/-0.16°) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.)
			for Cold Area	
5 - Seater		A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)		
	for Cold Area		A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)	



	VXL	7 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.)	
			for Cold Area	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)	
		5 - Seater	-	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)	
			for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)	
	7 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.)		
		for Cold Area	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)		
	KDJ150L-GKFEYW	TX	2 - Seater	-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.0 +/-2 mm (0.16 +/-0.08 in.) (*1) C - D: 4.1 +/-2 mm (0.16 +/-0.08 in.) (*2)
				for Cold Area	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.5 +/-2 mm (0.14 +/-0.08 in.)
5 - Seater			-	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.6 +/-2 mm (0.14 +/-0.08 in.)	
			for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)	
			Spare Tire Less	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 3.9 +/-2 mm (0.15 +/-0.08 in.)	
7 - Seater			-	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.3 +/-2 mm (0.13 +/-0.08 in.)	
		for Cold Area	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.) (*1) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.) (*2)		
TXL		2 - Seater	-	A + B: 0°8' +/-0°10' (0.14° +/-0.16°) C - D: 3.7 +/-2 mm (0.15 +/-0.08 in.)	
			for Cold Area	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.2 +/-2 mm (0.13 +/-0.08 in.)	
		5 - Seater	-	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.3 +/-2 mm (0.13 +/-0.08 in.)	
	for Cold Area		A + B: 0°7' +/-0°10' (0.10° +/-0.16°) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.)		
	7 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)		
		for Cold Area	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.5 +/-2 mm (0.10 +/-0.08 in.)		
			-	A + B: 0°8' +/-0°10' (0.13° +/-0.16°)	

KDJ150L-GKFEYW	VX	5 - Seater	-	C - D: 3.4 +/-2 mm (0.13 +/-0.08 in.)
			for Cold Area	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.3 +/-2 mm (0.13 +/-0.08 in.)
		7 - Seater	-	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)
			for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)
	VXL	5 - Seater	-	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.3 +/-2 mm (0.13 +/-0.08 in.)
			for Cold Area	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.2 +/-2 mm (0.13 +/-0.08 in.)
		7 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)
			for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
KDJ150R-GKAEYW	TX	2 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
			for Cold Area	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.1 +/-2 mm (0.16 +/-0.08 in.)
		5 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.)
			for Cold Area	A + B: 0°9' +/-0°10' (0.14° +/-0.16°) C - D: 3.7 +/-2 mm (0.15 +/-0.08 in.)
			Spare Tire Less	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
			-	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.3 +/-2 mm (0.09 +/-0.08 in.)
		7 - Seater	for Cold Area	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.4 +/-2 mm (0.13 +/-0.08 in.)
			-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.)
TXL	2 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.)	
		for Cold Area	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 3.9 +/-2 mm (0.15 +/-0.08 in.)	
		-	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.3 +/-2 mm (0.09 +/-0.08 in.)	
		for Cold Area	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.4 +/-2 mm (0.13 +/-0.08 in.)	
	5 - Seater	-	A + B: 0°5' +/-0°10' (0.07° +/-0.16°) C - D: 2.0 +/-2 mm (0.08 +/-0.08 in.)	
		for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)	
		-	A + B: 0°5' +/-0°10' (0.07° +/-0.16°) C - D: 2.0 +/-2 mm (0.08 +/-0.08 in.)	
		for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)	
7 - Seater	-	A + B: 0°5' +/-0°10' (0.07° +/-0.16°) C - D: 2.0 +/-2 mm (0.08 +/-0.08 in.)		
	for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)		
			-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)

KDJ150R-GKAEYW	VX	5 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.)
			for Cold Area	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)
		7 - Seater	-	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.5 +/-2 mm (0.10 +/-0.08 in.)
	VXL	5 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)
			for Cold Area	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.)
		7 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)
KDJ150R-GKFEYW	TX	2 - Seater	-	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.3 +/-2 mm (0.13 +/-0.08 in.)
			for Cold Area	A + B: 0°10' +/-0°10' (0.16° +/-0.16°) C - D: 4.4 +/-2 mm (0.17 +/-0.08 in.)
		5 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
			for Cold Area	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.0 +/-2 mm (0.16 +/-0.08 in.)
			Spare Tire Less	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.2 +/-2 mm (0.13 +/-0.08 in.)
		7 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.)
for Cold Area	A + B: 0°9' +/-0°10' (0.14° +/-0.16°) C - D: 3.7 +/-2 mm (0.15 +/-0.08 in.)			
KDJ150R-GKFEYW	TXL	2 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.) (*1) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.) (*2)
			for Cold Area	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.1 +/-2 mm (0.16 +/-0.08 in.)
		5 - Seater	-	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.5 +/-2 mm (0.10 +/-0.08 in.)
			for Cold Area	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.6 +/-2 mm (0.14 +/-0.08 in.)
		7 - Seater	-	A + B: 0°5' +/-0°10' (0.09° +/-0.16°) C - D: 2.4 +/-2 mm (0.09 +/-0.08 in.)
			for Cold Area	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.4 +/-2 mm (0.13 +/-0.08 in.)

KDJ150R-GKFEYW	VX	5 - Seater	-	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.3 +/-2 mm (0.13 +/-0.08 in.)
			for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)
		7 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)
			for Cold Area	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.)
	VXL	5 - Seater	-	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.3 +/-2 mm (0.13 +/-0.08 in.)
			for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.)
		7 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.) (*1) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.) (*2)
			for Cold Area	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)
GRJ150L-GKAEKW	TX	2 - Seater	-	A + B: 0°9' +/-0°10' (0.14° +/-0.16°) C - D: 3.8 +/-2 mm (0.15 +/-0.08 in.)
		5 - Seater	-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 3.9 +/-2 mm (0.15 +/-0.08 in.)
		7 - Seater	-	A + B: 0°3' +/-0°10' (0.04° +/-0.16°) (*1) C - D: 1.0 +/-2 mm (0.04 +/-0.08 in.) (*1) A + B: 0°9' +/-0°10' (0.14° +/-0.16°) (*2) C - D: 3.6 +/-2 mm (0.14 +/-0.08 in.) (*2)
GRJ150L-GKAEKW	TXL	2 - Seater	-	A + B: 0°9' +/-0°10' (0.14° +/-0.16°) C - D: 3.7 +/-2 mm (0.15 +/-0.08 in.)
		5 - Seater	-	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) (*1) C - D: 3.5 +/-2 mm (0.14 +/-0.08 in.) (*1) A + B: 0°2' +/-0°10' (0.03° +/-0.16°) (*2) C - D: 0.9 +/-2 mm (0.04 +/-0.08 in.) (*2)
		7 - Seater	-	A + B: 0°2' +/-0°10' (0.02° +/-0.16°) C - D: 0.6 +/-2 mm (0.02 +/-0.08 in.)
	VX	5 - Seater	-	A + B: 0°2' +/-0°10' (0.04° +/-0.16°) C - D: 1.0 +/-2 mm (0.04 +/-0.08 in.)
		7 - Seater	-	A + B: 0°2' +/-0°10' (0.03° +/-0.16°) C - D: 0.7 +/-2 mm (0.03 +/-0.08 in.)
	5 - Seater	-	A + B: 0°2' +/-0°10' (0.04° +/-0.16°) C - D: 1.0 +/-2 mm	

	VXL			(0.04 +/-0.08 in.)
		7 - Seater	-	A + B: 0°2' +/-0°10' (0.03° +/-0.16°) C - D: 0.7 +/-2 mm (0.03 +/-0.08 in.)
GRJ150R-GKAEKW	TX	2 - Seater	-	A + B: 0°4' +/-0°10' (0.05° +/-0.16°) C - D: 1.4 +/-2 mm (0.06 +/-0.08 in.)
		5 - Seater	-	A + B: 0°3' +/-0°10' (0.05° +/-0.16°) C - D: 1.3 +/-2 mm (0.05 +/-0.08 in.)
		7 - Seater	-	A + B: 0°9' +/-0°10' (0.14° +/-0.16°) (*1) C - D: 3.6 +/-2 mm (0.14 +/-0.08 in.) (*1) A + B: 0°3' +/-0°10' (0.04° +/-0.16°) (*2) C - D: 1.0 +/-2 mm (0.04 +/-0.08 in.) (*2)
	TXL	2 - Seater	-	A + B: 0°3' +/-0°10' (0.04° +/-0.16°) C - D: 1.1 +/-2 mm (0.04 +/-0.08 in.)
		5 - Seater	-	A + B: 0°2' +/-0°10' (0.03° +/-0.16°) C - D: 0.9 +/-2 mm (0.04 +/-0.08 in.)
		7 - Seater	-	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) (*1) C - D: 3.2 +/-2 mm (0.13 +/-0.08 in.) (*1) A + B: 0°2' +/-0°10' (0.02° +/-0.16°) (*2) C - D: 0.6 +/-2 mm (0.02 +/-0.08 in.) (*2)
GRJ150R-GKAEKW	VX	5 - Seater	-	A + B: 0°4' +/-0°10' (0.07° +/-0.16°) (*1) C - D: 1.8 +/-2 mm (0.07 +/-0.08 in.) (*1) A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) (*2) C - D: 4.5 +/-2 mm (0.18 +/-0.08 in.) (*2)
		7 - Seater	-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.2 +/-2 mm (0.17 +/-0.08 in.)
	VXL	5 - Seater	-	A + B: 0°4' +/-0°10' (0.07° +/-0.16°) (*1) C - D: 1.8 +/-2 mm (0.07 +/-0.08 in.) (*1) A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) (*2) C - D: 4.5 +/-2 mm (0.18 +/-0.08 in.) (*2)
		7 - Seater	-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.2 +/-2 mm (0.17 +/-0.08 in.)
			-	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) (*1) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.) (*1) A + B: 0°7' +/-0°10' (0.11° +/-0.16°) (*2) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.) (*2)

KDJ155L-GJAEYW	TX	2 - Seater		A + B: 0°8' +/-0°10' (0.13° +/-0.16°) (*1) C - D: 3.5 +/-2 mm (0.14 +/-0.08 in.) (*1) A + B: 0°9' +/-0°10' (0.14° +/-0.16°) (*2) C - D: 3.8 +/-2 mm (0.15 +/-0.08 in.) (*2)
			for Cold Area	
		5 - Seater		A + B: 0°6' +/-0°10' (0.10° +/-0.16°) (*1) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.) (*1) A + B: 0°5' +/-0°10' (0.09° +/-0.16°) (*2) C - D: 2.4 +/-2 mm (0.09 +/-0.08 in.) (*2)
			-	
			for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) (*1) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.) (*1) A + B: 0°7' +/-0°10' (0.12° +/-0.16°) (*2) C - D: 3.2 +/-2 mm (0.13 +/-0.08 in.) (*2)
			Spare Tire Less	A + B: 0°7' +/-0°10' (0.10° +/-0.16°) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.)
Spare Tire Less for Cold Area	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)			
KDJ155L-GJAEYW	TXL	2 - Seater		A + B: 0°7' +/-0°10' (0.11° +/-0.16°) (*1) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.) (*1) A + B: 0°6' +/-0°10' (0.10° +/-0.16°) (*2) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.) (*2)
			-	
		5 - Seater		A + B: 0°8' +/-0°10' (0.13° +/-0.16°) (*1) C - D: 3.4 +/-2 mm (0.13 +/-0.08 in.) (*1) A + B: 0°8' +/-0°10' (0.14° +/-0.16°) (*2) C - D: 3.6 +/-2 mm (0.14 +/-0.08 in.) (*2)
			for Cold Area	
			-	A + B: 0°5' +/-0°10' (0.09° +/-0.16°) (*1) C - D: 2.4 +/-2 mm (0.09 +/-0.08 in.) (*1) A + B: 0°5' +/-0°10' (0.08° +/-0.16°) (*2) C - D: 2.1 +/-2 mm (0.08 +/-0.08 in.) (*2)
			for Cold Area	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) (*1) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.) (*1) A + B: 0°7' +/-0°10' (0.11° +/-0.16°) (*2) C - D: 2.9 +/-2 mm

				(0.11 +/-0.08 in.) (*2)
			Spare Tire Less	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.5 +/-2 mm (0.10 +/-0.08 in.)
			Spare Tire Less for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
	VX	5 - Seater	-	A + B: 0°4' +/-0°10' (0.06° +/-0.16°) (*1) C - D: 1.7 +/-2 mm (0.07 +/-0.08 in.) (*1) A + B: 0°4' +/-0°10' (0.05° +/-0.16°) (*2) C - D: 1.4 +/-2 mm (0.06 +/-0.08 in.) (*2)
			for Cold Area	A + B: 0°5' +/-0°10' (0.08° +/-0.16°) C - D: 2.1 +/-2 mm (0.08 +/-0.08 in.) (*1) C - D: 2.2 +/-2 mm (0.09 +/-0.08 in.) (*2)
			Spare Tire Less	A + B: 0°5' +/-0°10' (0.07° +/-0.16°) C - D: 1.9 +/-2 mm (0.07 +/-0.08 in.)
			Spare Tire Less for Cold Area	A + B: 0°5' +/-0°10' (0.08° +/-0.16°) C - D: 2.3 +/-2 mm (0.09 +/-0.08 in.)
		2 - Seater	-	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) (*1) C - D: 3.4 +/-2 mm (0.13 +/-0.08 in.) (*1) A + B: 0°7' +/-0°10' (0.12° +/-0.16°) (*2) C - D: 3.3 +/-2 mm (0.13 +/-0.08 in.) (*2)
			for Cold Area	A + B: 0°5' +/-0°10' (0.09° +/-0.16°) (*1) C - D: 2.3 +/-2 mm (0.09 +/-0.08 in.) (*1) A + B: 0°5' +/-0°10' (0.08° +/-0.16°) (*2) C - D: 2.1 +/-2 mm (0.08 +/-0.08 in.) (*2)
KDJ155L-GJFEYW	TX		-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) (*1) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.) (*1) A + B: 0°6' +/-0°10' (0.10° +/-0.16°) (*2) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.) (*2)
		5 - Seater	for Cold Area	A + B: 0°4' +/-0°10' (0.07° +/-0.16°) (*1) C - D: 1.8 +/-2 mm (0.07 +/-0.08 in.) (*1) A + B: 0°4' +/-0°10' (0.06° +/-0.16°) (*2) C - D: 1.5 +/-2 mm (0.06 +/-0.08 in.) (*2)
			Spare Tire Less	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.1 +/-2 mm

KDJ155L-GJFEYW	TXL	2 - Seater		(0.12 +/-0.08 in.)
			Spare Tire Less for Cold Area	A + B: 0°5' +/-0°10' (0.07° +/-0.16°) C - D: 2.0 +/-2 mm (0.08 +/-0.08 in.)
		for Cold Area	-	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) (*1) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.) (*1) A + B: 0°7' +/-0°10' (0.11° +/-0.16°) (*2) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.) (*2)
				A + B: 0°8' +/-0°10' (0.13° +/-0.16°) (*1) C - D: 3.5 +/-2 mm (0.14 +/-0.08 in.) (*1) A + B: 0°9' +/-0°10' (0.14° +/-0.16°) (*2) C - D: 3.8 +/-2 mm (0.15 +/-0.08 in.) (*2)
		5 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) (*1) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.) (*1) A + B: 0°5' +/-0°10' (0.09° +/-0.16°) (*2) C - D: 2.4 +/-2 mm (0.09 +/-0.08 in.) (*2)
			for Cold Area	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) (*1) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.) (*1) A + B: 0°7' +/-0°10' (0.12° +/-0.16°) (*2) C - D: 3.2 +/-2 mm (0.13 +/-0.08 in.) (*2)
	Spare Tire Less		A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.)	
	Spare Tire Less for Cold Area		A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)	
	VX	5 - Seater	-	A + B: 0°5' +/-0°10' (0.07° +/-0.16°) (*1) C - D: 2.0 +/-2 mm (0.08 +/-0.08 in.) (*1) A + B: 0°4' +/-0°10' (0.06° +/-0.16°) (*2) C - D: 1.7 +/-2 mm (0.07 +/-0.08 in.) (*2)
			for Cold Area	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.4 +/-2 mm (0.09 +/-0.08 in.) (*1) C - D: 2.5 +/-2 mm (0.10 +/-0.08 in.) (*2)
		Spare Tire Less	A + B: 0°5' +/-0°10' (0.08° +/-0.16°) C - D: 2.2 +/-2 mm (0.09 +/-0.08 in.)	
		Spare Tire Less for Cold Area	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.)	



KDJ155R-GJAEYW	TX	2 - Seater	-	A + B: 0°5' +/-0°10' (0.08° +/-0.16°) C - D: 2.1 +/-2 mm (0.08 +/-0.08 in.)
			for Cold Area	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.5 +/-2 mm (0.10 +/-0.08 in.)
		5 - Seater	-	A + B: 0°4' +/-0°10' (0.06° +/-0.16°) C - D: 1.7 +/-2 mm (0.07 +/-0.08 in.) (*1) C - D: 1.6 +/-2 mm (0.06 +/-0.08 in.) (*2)
			for Cold Area	A + B: 0°5' +/-0°10' (0.08° +/-0.16°) C - D: 2.0 +/-2 mm (0.08 +/-0.08 in.)
			Spare Tire Less	A + B: 0°4' +/-0°10' (0.07° +/-0.16°) C - D: 1.7 +/-2 mm (0.07 +/-0.08 in.)
			Spare Tire Less for Cold Area	A + B: 0°5' +/-0°10' (0.08° +/-0.16°) C - D: 2.1 +/-2 mm (0.08 +/-0.08 in.)
	TXL	2 - Seater	-	A + B: 0°4' +/-0°10' (0.07° +/-0.16°) C - D: 1.8 +/-2 mm (0.07 +/-0.08 in.)
			for Cold Area	A + B: 0°5' +/-0°10' (0.09° +/-0.16°) C - D: 2.3 +/-2 mm (0.09 +/-0.08 in.)
		5 - Seater	-	A + B: 0°3' +/-0°10' (0.05° +/-0.16°) C - D: 1.4 +/-2 mm (0.06 +/-0.08 in.) (*1) C - D: 1.3 +/-2 mm (0.05 +/-0.08 in.) (*2)
			for Cold Area	A + B: 0°4' +/-0°10' (0.07° +/-0.16°) C - D: 1.7 +/-2 mm (0.07 +/-0.08 in.)
			Spare Tire Less	A + B: 0°4' +/-0°10' (0.06° +/-0.16°) C - D: 1.5 +/-2 mm (0.06 +/-0.08 in.)
			Spare Tire Less for Cold Area	A + B: 0°5' +/-0°10' (0.07° +/-0.16°) C - D: 1.9 +/-2 mm (0.07 +/-0.08 in.)
KDJ155R-GJAEYW	VX	5 - Seater	-	A + B: 0°7' +/-0°10' (0.10° +/-0.16°) (*1) C - D: 2.7 +/-2 mm (0.11 +/-0.08 in.) (*1) A + B: 0°5' +/-0°10' (0.08° +/-0.16°) (*2) C - D: 2.2 +/-2 mm (0.09 +/-0.08 in.) (*2)
			for Cold Area	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.1 +/-2 mm (0.12 +/-0.08 in.)
			Spare Tire Less	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.9 +/-2 mm (0.11 +/-0.08 in.)
			Spare Tire Less for Cold Area	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.3 +/-2 mm (0.13 +/-0.08 in.)
		2 - Seater	-	A + B: 0°5' +/-0°10' (0.09° +/-0.16°) C - D: 2.4 +/-2 mm (0.09 +/-0.08 in.) (*1) C - D: 2.5 +/-2 mm (0.10 +/-0.08 in.)

KDJ155R-GJFEYW	TX	5 - Seater		(*2)
			for Cold Area	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.8 +/-2 mm (0.11 +/-0.08 in.)
			-	A + B: 0°4' +/-0°10' (0.07° +/-0.16°) C - D: 1.9 +/-2 mm (0.07 +/-0.08 in.)
			for Cold Area	A + B: 0°5' +/-0°10' (0.08° +/-0.16°) C - D: 2.3 +/-2 mm (0.09 +/-0.08 in.)
			Spare Tire Less	A + B: 0°5' +/-0°10' (0.07° +/-0.16°) C - D: 2.0 +/-2 mm (0.08 +/-0.08 in.)
KDJ155R-GJFEYW	TXL	2 - Seater	-	A + B: 0°5' +/-0°10' (0.08° +/-0.16°) C - D: 2.1 +/-2 mm (0.08 +/-0.08 in.)
			for Cold Area	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.5 +/-2 mm (0.10 +/-0.08 in.)
		5 - Seater	-	A + B: 0°4' +/-0°10' (0.06° +/-0.16°) C - D: 1.6 +/-2 mm (0.06 +/-0.08 in.)
			for Cold Area	A + B: 0°5' +/-0°10' (0.07° +/-0.16°) C - D: 2.0 +/-2 mm (0.08 +/-0.08 in.)
			Spare Tire Less	A + B: 0°4' +/-0°10' (0.07° +/-0.16°) C - D: 1.8 +/-2 mm (0.07 +/-0.08 in.)
KDJ155R-GJFEYW	VX	5 - Seater		A + B: 0°7' +/-0°10' (0.11° +/-0.16°) (*1) C - D: 3.0 +/-2 mm (0.12 +/-0.08 in.) (*1) A + B: 0°6' +/-0°10' (0.10° +/-0.16°) (*2) C - D: 2.6 +/-2 mm (0.10 +/-0.08 in.) (*2)
			for Cold Area	A + B: 0°4' +/-0°10' (0.05° +/-0.16°) C - D: 1.4 +/-2 mm (0.06 +/-0.08 in.)
			Spare Tire Less	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.2 +/-2 mm (0.13 +/-0.08 in.)
			Spare Tire Less for Cold Area	A + B: 0°4' +/-0°10' (0.06° +/-0.16°) C - D: 1.5 +/-2 mm (0.06 +/-0.08 in.)
			KDJ155R-GJFEYW	TX
for Double Tank Type	A + B: 0°13' +/- 0°10' (0.21° +/- 0.16°) C - D: 5.65 +/-2 mm (0.22 +/-0.08 in.)			
7 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.16 +/-2 mm (0.20 +/-0.08 in.)		
		A + B: 0°12' +/- 0°10' (0.20° +/-		

KDJ150R-GKAEYQ	TXL	7 - Seater		for Double Tank Type	0.16°) C - D: 5.32 +/-2 mm (0.21 +/-0.08 in.)	
			-		A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.84 +/-2 mm (0.19 +/-0.08 in.)	
	VX	7 - Seater			A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.00 +/-2 mm (0.20 +/-0.08 in.)	
			for Double Tank Type		A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.56 +/-2 mm (0.10 +/-0.08 in.)	
	VXL	7 - Seater			A + B: 0°7' +/-0°10' (0.10° +/-0.16°) C - D: 2.71 +/-2 mm (0.11 +/-0.08 in.)	
			for Double Tank Type		A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.08 +/-2 mm (0.12 +/-0.08 in.)	
KDJ150R-GKFEYQ	TX	5 - Seater			A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.19 +/-2 mm (0.16 +/-0.08 in.)	
			for Double Tank Type		A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.35 +/-2 mm (0.17 +/-0.08 in.)	
		7 - Seater			A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.40 +/-2 mm (0.21 +/-0.08 in.)	
			for Double Tank Type		A + B: 0°13' +/- 0°10' (0.21° +/- 0.16°) C - D: 5.57 +/-2 mm (0.22 +/-0.08 in.)	
	TXL	7 - Seater			A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.56 +/-2 mm (0.14 +/-0.08 in.)	
			for Double Tank Type		A + B: 0°9' +/-0°10' (0.14° +/-0.16°) C - D: 3.72 +/-2 mm (0.15 +/-0.08 in.)	
		VX	7 - Seater			A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.86 +/-2 mm (0.11 +/-0.08 in.)
				for Double Tank Type		A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.01 +/-2 mm (0.12 +/-0.08 in.)
	VXL	7 - Seater			A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.56 +/-2 mm (0.10 +/-0.08 in.)	
			for Double Tank Type		A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.71 +/-2 mm (0.11 +/-0.08 in.)	
	TX	5 - Seater			A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.35 +/-2 mm (0.21 +/-0.08 in.)	
			for Double Tank Type		A + B: 0°12' +/- 0°10' (0.21° +/- 0.16°) C - D: 5.53 +/-2 mm (0.22 +/-0.08 in.)	
					A + B: 0°11' +/- 0°10' (0.19° +/- 0.16°)	

GRJ150R-GKAEKQ		7 - Seater		C - D: 5.02 +/-2 mm (0.20 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.19 +/-2 mm (0.20 +/-0.08 in.)	
	TXL	7 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.69 +/-2 mm (0.18 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.85 +/-2 mm (0.19 +/-0.08 in.)	
	VX	7 - Seater	-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.00 +/-2 mm (0.16 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.15° +/- 0.16°) C - D: 4.15 +/-2 mm (0.16 +/-0.08 in.)	
	VXL	7 - Seater	-	A + B: 0°8' +/-0°10' (0.14° +/-0.16°) C - D: 3.68 +/-2 mm (0.14 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°9' +/-0°10' (0.14° +/-0.16°) C - D: 3.84 +/-2 mm (0.15 +/-0.08 in.)	
GRJ150R-GKFEKQ	TX	5 - Seater	-	A + B: 0°13' +/- 0°10' (0.21° +/- 0.16°) C - D: 5.62 +/-2 mm (0.22 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°13' +/- 0°10' (0.22° +/- 0.16°) C - D: 5.79 +/-2 mm (0.23 +/-0.08 in.)	
		7 - Seater	-	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.27 +/-2 mm (0.21 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.44 +/-2 mm (0.21 +/-0.08 in.)	
	TXL	7 - Seater	-	A + B: 0°12' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.93 +/-2 mm (0.19 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.10 +/-2 mm (0.20 +/-0.08 in.)	
	VX	7 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.31 +/-2 mm (0.17 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.47 +/-2 mm (0.18 +/-0.08 in.)	
	VXL	7 - Seater	-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.00 +/-2 mm (0.16 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.31 +/-2 mm (0.17 +/-0.08 in.)	
		TX	5 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.14 +/-2 mm

KDJ155R-GJAEYW	TXL	5 - Seater	-	(0.20 +/-0.08 in.) A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.86 +/-2 mm (0.19 +/-0.08 in.)
	VX	5 - Seater	-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.09 +/-2 mm (0.16 +/-0.08 in.)
KDJ150L-GKAEYV	TX	5 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.53 +/-2 mm (0.18 +/-0.08 in.)
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.69 +/-2 mm (0.18 +/-0.08 in.)
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.22 +/-2 mm (0.17 +/-0.08 in.)
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.37 +/-2 mm (0.17 +/-0.08 in.)
		9 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.53 +/-2 mm (0.18 +/-0.08 in.)
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.69 +/-2 mm (0.18 +/-0.08 in.)
	TXL	5 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.52 +/-2 mm (0.18 +/-0.08 in.)
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.68 +/-2 mm (0.18 +/-0.08 in.)
		7 - Seater	-	A + B: 0°9' +/-0°10' (0.14° +/-0.16°) C - D: 3.74 +/-2 mm (0.15 +/-0.08 in.)
			for Double Tank Type	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 3.90 +/-2 mm (0.15 +/-0.08 in.)
		9 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.52 +/-2 mm (0.18 +/-0.08 in.)
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.68 +/-2 mm (0.18 +/-0.08 in.)
KDJ150L-GKAEYV	VX	7 - Seater	-	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.58 +/-2 mm (0.10 +/-0.08 in.)
			for Double Tank Type	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.73 +/-2 mm (0.11 +/-0.08 in.)
	VXL	7 - Seater	-	A + B: 0°6' +/-0°10' (0.09° +/-0.16°) C - D: 2.51 +/-2 mm (0.10 +/-0.08 in.)
			for Double Tank Type	A + B: 0°6' +/-0°10' (0.10° +/-0.16°) C - D: 2.65 +/-2 mm (0.10 +/-0.08 in.)
				A + B: 0°11' +/- 0°10' (0.18° +/-

KDJ150L-GKFEYV	TX	5 - Seater	-	0.16° C - D: 4.84 +/-2 mm (0.19 +/-0.08 in.)
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.00 +/-2 mm (0.20 +/-0.08 in.)
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.53 +/-2 mm (0.18 +/-0.08 in.)
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.69 +/-2 mm (0.18 +/-0.08 in.)
		9 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.84 +/-2 mm (0.19 +/-0.08 in.)
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.00 +/-2 mm (0.20 +/-0.08 in.)
KDJ150L-GKFEYV	TXL	5 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.37 +/-2 mm (0.17 +/-0.08 in.)
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.52 +/-2 mm (0.18 +/-0.08 in.)
		7 - Seater	-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.05 +/-2 mm (0.16 +/-0.08 in.)
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.21 +/-2 mm (0.17 +/-0.08 in.)
		9 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.37 +/-2 mm (0.17 +/-0.08 in.)
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.52 +/-2 mm (0.18 +/-0.08 in.)
	VX	7 - Seater	-	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.88 +/-2 mm (0.11 +/-0.08 in.)
			for Double Tank Type	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 3.02 +/-2 mm (0.12 +/-0.08 in.)
	VXL	7 - Seater	-	A + B: 0°7' +/-0°10' (0.10° +/-0.16°) C - D: 2.80 +/-2 mm (0.11 +/-0.08 in.)
			for Double Tank Type	A + B: 0°7' +/-0°10' (0.11° +/-0.16°) C - D: 2.95 +/-2 mm (0.12 +/-0.08 in.)
		5 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.19 +/-2 mm (0.20 +/-0.08 in.)
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.36 +/-2 mm (0.21 +/-0.08 in.)
		-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.86 +/-2 mm	

GRJ150L-GKAEKV	TX	7 - Seater	-	(0.19 +/-0.08 in.)
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.02 +/-2 mm (0.20 +/-0.08 in.)
		9 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.19 +/-2 mm (0.20 +/-0.08 in.)
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.36 +/-2 mm (0.21 +/-0.08 in.)
	TXL	5 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.69 +/-2 mm (0.18 +/-0.08 in.)
			for Double Tank Type	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.85 +/-2 mm (0.19 +/-0.08 in.)
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.36 +/-2 mm (0.17 +/-0.08 in.)
			for Double Tank Type	A + B: 0°10' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.52 +/-2 mm (0.18 +/-0.08 in.)
9 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.69 +/-2 mm (0.18 +/-0.08 in.)		
	for Double Tank Type	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.85 +/-2 mm (0.19 +/-0.08 in.)		
GRJ150L-GKAEKV	VX	7 - Seater	-	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.20 +/-2 mm (0.13 +/-0.08 in.)
			for Double Tank Type	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.36 +/-2 mm (0.13 +/-0.08 in.)
	VXL	7 - Seater	-	A + B: 0°7' +/-0°10' (0.12° +/-0.16°) C - D: 3.12 +/-2 mm (0.12 +/-0.08 in.)
			for Double Tank Type	A + B: 0°8' +/-0°10' (0.12° +/-0.16°) C - D: 3.28 +/-2 mm (0.13 +/-0.08 in.)
GRJ150L-GKFEKV	TX	5 - Seater	-	A + B: 0°13' +/- 0°10' (0.21° +/- 0.16°) C - D: 5.53 +/-2 mm (0.22 +/-0.08 in.)
			for Double Tank Type	A + B: 0°13' +/- 0°10' (0.21° +/- 0.16°) C - D: 5.70 +/-2 mm (0.22 +/-0.08 in.)
		7 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.19 +/-2 mm (0.20 +/-0.08 in.)
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.20° +/- 0.16°) C - D: 5.36 +/-2 mm (0.21 +/-0.08 in.)
	-	7 - Seater	-	A + B: 0°13' +/- 0°10' (0.21° +/- 0.16°) C - D: 5.53 +/-2 mm (0.22 +/-0.08 in.)
			-	A + B: 0°13' +/- 0°10' (0.21° +/- 0.16°) C - D: 5.53 +/-2 mm (0.22 +/-0.08 in.)

GRJ150L-GKFEKV	TXL	9 - Seater		A + B: 0°13' +/- 0°10' (0.21° +/- 0.16°) C - D: 5.70 +/-2 mm (0.22 +/-0.08 in.)
			for Double Tank Type	
		5 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.02 +/-2 mm (0.20 +/-0.08 in.)
				for Double Tank Type
		7 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.69 +/-2 mm (0.18 +/-0.08 in.)
				for Double Tank Type
	9 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.02 +/-2 mm (0.20 +/-0.08 in.)	
			for Double Tank Type	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.19 +/-2 mm (0.20 +/-0.08 in.)
	VX	7 - Seater	-	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.52 +/-2 mm (0.14 +/-0.08 in.)
				for Double Tank Type
		7 - Seater	-	A + B: 0°8' +/-0°10' (0.13° +/-0.16°) C - D: 3.44 +/-2 mm (0.14 +/-0.08 in.)
				for Double Tank Type
TRJ150L-GKPEKV	TX	5 - Seater	-	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.67 +/-2 mm (0.18 +/-0.08 in.)
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.33 +/-2 mm (0.17 +/-0.08 in.)
		9 - Seater	-	A + B: 0°11' +/- 0°10' (0.17° +/- 0.16°) C - D: 4.67 +/-2 mm (0.18 +/-0.08 in.)
	TXL	5 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.41 +/-2 mm (0.17 +/-0.08 in.)
		7 - Seater	-	A + B: 0°9' +/-0°10' (0.15° +/-0.16°) C - D: 4.07 +/-2 mm (0.16 +/-0.08 in.)
		9 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.41 +/-2 mm (0.17 +/-0.08 in.)
		5 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.01 +/-2 mm (0.20 +/-0.08 in.)
				A + B: 0°11' +/-



TRJ150L-GKMEKV	TX	7 - Seater	-	0°10' (0.17° +/- 0.16°) C - D: 4.67 +/-2 mm (0.18 +/-0.08 in.)
		9 - Seater	-	A + B: 0°12' +/- 0°10' (0.19° +/- 0.16°) C - D: 5.01 +/-2 mm (0.20 +/-0.08 in.)
	TXL	5 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.75 +/-2 mm (0.19 +/-0.08 in.)
		7 - Seater	-	A + B: 0°10' +/- 0°10' (0.16° +/- 0.16°) C - D: 4.41 +/-2 mm (0.17 +/-0.08 in.)
TRJ155L-GKPEKV	TXL	9 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.75 +/-2 mm (0.19 +/-0.08 in.)
		5 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.84 +/-2 mm (0.19 +/-0.08 in.)
TRJ155L-GKPEKV	TX	5 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.74 +/-2 mm (0.19 +/-0.08 in.)
	TXL	5 - Seater	-	A + B: 0°11' +/- 0°10' (0.18° +/- 0.16°) C - D: 4.74 +/-2 mm (0.19 +/-0.08 in.)

(\*1) Light duty

(\*2) Hard duty

If the toe-in is not within the specified range, adjust it at the rack ends.

**7. ADJUST TOE-IN**


- a. Detach the rack boot set clips.
- b. Loosen the tie rod end lock nuts.
- c. Turn the right and left rack ends by an equal amount to adjust the toe-in to the center value.

- d. Check that the lengths of the right and left rack ends are approximately the same.

Text in Illustration

*a	Length
➔	Lock Nut

Standard difference:  
0 +/-1 mm (0 +/-0.0394 in.) or less

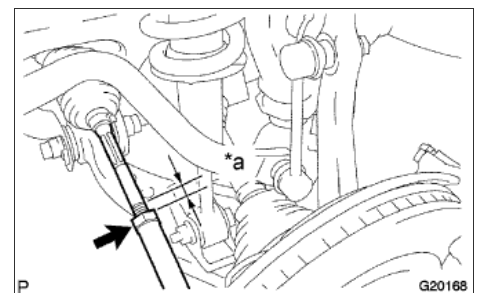

- e. Tighten the tie rod end lock nuts.

Torque:  
88 N\*m{ 897 kgf\*cm , 65 ft.\*lbf }

- f. Place the boots on the seats and install the clips.

**HINT:**


Make sure that the boots are not twisted.

**8. INSPECT WHEEL ANGLE**

- a. Turn the steering wheel to the left and right full lock positions, and measure the turning angle.

Text in Illustration

*a	Inside
*b	Outside
➔	Front

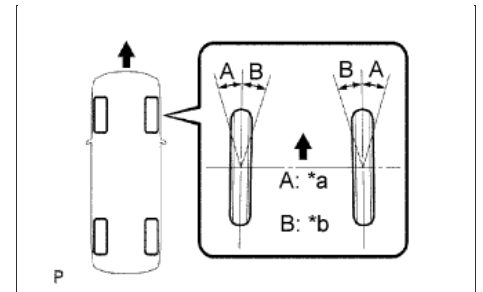**Standard Wheel Turning Angle (Unloaded Vehicle):**

Vehicle Model	Grade	Seating Capacity	Item	Inside Wheel Angle	Outside Wheel Angle: Reference
KDJ150L-GKAEY	TX	5 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)
		7 - Seater	-	34°17' to 37°17' (34.28° to 37.28°)	32°54' (32.90°)
			for Double Tank Type	34°17' to 37°17' (34.29° to 37.29°)	32°55' (32.92°)
		9 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)
	TXL	5 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)
			for Double Tank Type	34°19' to 37°19' (34.32° to 37.32°)	32°59' (32.98°)
		7 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.93°)
			for Double Tank Type	34°18' to 37°18' (34.30° to 37.30°)	32°57' (32.94°)
		9 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)
			for Double Tank Type	34°19' to 37°19' (34.32° to 37.32°)	32°59' (32.98°)
	VX	5 - Seater	-	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.75°)
			for Double Tank Type	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)
		7 - Seater	-	34°11' to 37°11' (34.18° to 37.18°)	32°43' (32.71°)
			for Double Tank Type	34°12' to 37°12' (34.19° to 37.19°)	32°44' (32.73°)
	VXL	7 - Seater	-	34°12' to 37°12' (34.19° to 37.19°)	32°44' (32.73°)
			for Double Tank Type	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.75°)
	TX	5 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	32°59' (32.99°)
7 - Seater		-	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)	
		for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)	

KDJ150L-GKFEY	TXL	9 - Seater	-	37.31°		
			for Double Tank Type	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
		5 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)	
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)	
	7 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)		
		for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)		
	9 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)		
		for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)		
	VX	5 - Seater	-	34°13' to 37°13' (34.22° to 37.22°)	32°47' (32.78°)	
			for Double Tank Type	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.80°)	
		7 - Seater	-	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.75°)	
			for Double Tank Type	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)	
	VXL	7 - Seater	-	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)	
			for Double Tank Type	34°13' to 37°13' (34.22° to 37.22°)	32°47' (32.78°)	
	KDJ150R-GKAEY	TX	5 - Seater	-	34°17' to 37°17' (34.29° to 37.29°)	32°54' (32.91°)
				for Double Tank Type	34°18' to 37°18' (34.29° to 37.29°)	32°56' (32.93°)
7 - Seater			-	34°16' to 37°16' (34.27° to 37.27°)	32°52' (32.87°)	
			for Double Tank Type	34°17' to 37°17' (34.28° to 37.28°)	32°53' (32.89°)	
9 - Seater		-	34°17' to 37°17' (34.29° to 37.29°)	32°54' (32.91°)		
		for Double Tank Type	34°18' to 37°18' (34.29° to 37.29°)	32°56' (32.93°)		
TXL		5 - Seater	-	34°16' to 37°16' (34.27° to 37.27°)	32°52' (32.87°)	
			for Double Tank Type	34°17' to 37°17' (34.28° to 37.28°)	32°53' (32.89°)	
		7 - Seater	-	34°15' to 37°15' (34.25° to 37.25°)	32°50' (32.84°)	
			for Double Tank Type	34°16' to 37°16' (34.26° to 37.26°)	32°51' (32.86°)	
9 - Seater		-	34°16' to 37°16' (34.27° to 37.27°)	32°52' (32.87°)		
		for Double Tank Type	34°17' to 37°17' (34.28° to 37.28°)	32°53' (32.89°)		
		5 - Seater	-	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.74°)	
				34°13' to 37°13'		

KDJ150R- GKFEY	VX		for Double Tank Type	(34.21° to 37.21°)	32°46' (32.76°)	
		7 - Seater	-	34°11' to 37°11' (34.18° to 37.18°)	32°43' (32.71°)	
	VXL	7 - Seater		for Double Tank Type	34°11' to 37°11' (34.19° to 37.19°)	32°44' (32.73°)
				-	34°11' to 37°11' (34.19° to 37.19°)	32°44' (32.73°)
	TX	5 - Seater		-	34°17' to 37°17' (34.28° to 37.28°)	32°53' (32.89°)
				for Double Tank Type	34°17' to 37°17' (34.28° to 37.28°)	32°54' (32.91°)
		7 - Seater		-	34°15' to 37°15' (34.26° to 37.26°)	32°51' (32.85°)
				for Double Tank Type	34°16' to 37°16' (34.27° to 37.27°)	32°52' (32.87°)
		5 - Seater		-	34°20' to 37°20' (34.33° to 37.33°)	32°60' (32.99°)
				for Double Tank Type	34°20' to 37°20' (34.34° to 37.34°)	33°1' (33.01°)
	7 - Seater		-	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.96°)	
			for Double Tank Type	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
VX	5 - Seater		-	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.74°)	
			for Double Tank Type	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)	
	7 - Seater		-	34°11' to 37°11' (34.18° to 37.18°)	32°43' (32.71°)	
			for Double Tank Type	34°11' to 37°11' (34.19° to 37.19°)	32°44' (32.73°)	
	7 - Seater		-	34°11' to 37°11' (34.19° to 37.19°)	32°44' (32.73°)	
			for Double Tank Type	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.74°)	
GRJ150L-	TX	5 - Seater		-	34°21' to 37°21' (34.34° to 37.34°)	33°1' (33.02°)
				for Double Tank Type	34°21' to 37°21' (34.35° to 37.35°)	33°2' (33.04°)
		7 - Seater		-	34°19' to 37°19' (34.32° to 37.32°)	32°59' (32.98°)
				for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	33°0' (33.00°)
		9 - Seater		-	34°21' to 37°21' (34.34° to 37.34°)	33°1' (33.02°)
				for Double Tank Type	34°21' to 37°21' (34.35° to 37.35°)	33°2' (33.04°)
	5 - Seater		-	34°19' to 37°19' (34.32° to 37.32°)	32°59' (32.98°)	
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	33°0' (33.00°)	
			-	34°18' to 37°18' (34.31° to 37.31°)	32°57' (32.95°)	

GKAEK	TXL	7 - Seater		34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)	
			for Double Tank Type			
		9 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°59' (32.98°)	
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	33°0' (33.00°)	
		VX	5 - Seater	-	34°14' to 37°14' (34.24° to 37.24°)	32°49' (32.82°)
				for Double Tank Type	34°15' to 37°15' (34.25° to 37.25°)	32°50' (32.84°)
	7 - Seater		-	34°13' to 37°13' (34.22° to 37.22°)	32°47' (32.78°)	
			for Double Tank Type	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.80°)	
	VXL	7 - Seater	-	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.80°)	
			for Double Tank Type	34°14' to 37°14' (34.24° to 37.24°)	32°49' (32.82°)	
	GRJ150L-GKFEK	TX	5 - Seater	-	34°21' to 37°21' (34.35° to 37.35°)	33°3' (33.04°)
				for Double Tank Type	34°22' to 37°22' (34.36° to 37.36°)	33°4' (33.06°)
7 - Seater			-	34°20' to 37°20' (34.34° to 37.34°)	33°0' (33.00°)	
			for Double Tank Type	34°21' to 37°21' (34.35° to 37.35°)	33°1' (33.02°)	
9 - Seater			-	34°21' to 37°21' (34.35° to 37.35°)	33°3' (33.04°)	
			for Double Tank Type	34°22' to 37°22' (34.36° to 37.36°)	33°4' (33.06°)	
TXL			5 - Seater	-	34°20' to 37°20' (34.34° to 37.34°)	33°0' (33.00°)
				for Double Tank Type	34°21' to 37°21' (34.35° to 37.35°)	33°1' (33.02°)
		7 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	32°59' (32.99°)	
		9 - Seater	-	34°20' to 37°20' (34.34° to 37.34°)	33°0' (33.00°)	
			for Double Tank Type	34°21' to 37°21' (34.35° to 37.35°)	33°1' (33.02°)	
VX		5 - Seater	-	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.75°)	
			for Double Tank Type	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)	
		7 - Seater	-	34°11' to 37°11' (34.18° to 37.18°)	32°43' (32.71°)	
			for Double Tank Type	34°11' to 37°11' (34.19° to 37.19°)	32°44' (32.73°)	
		VXL	7 - Seater	-	34°11' to 37°11' (34.19° to 37.19°)	32°44' (32.73°)
				for Double Tank Type	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.75°)
				-	34°20' to 37°20' (34.33° to	32°60'

LJ150L-GKMEE	TX	5 - Seater		37.33°)	(33.00°)
			for Double Tank Type	34°21' to 37°21' (34.34° to 37.34°)	33°1' (33.02°)
		7 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)
			for Double Tank Type	34°19' to 37°19' (34.32° to 37.32°)	32°59' (32.98°)
		9 - Seater	-	34°20' to 37°20' (34.33° to 37.33°)	32°60' (33.00°)
			for Double Tank Type	34°21' to 37°21' (34.34° to 37.34°)	33°1' (33.02°)
	TXL	5 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.96°)
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	32°59' (32.99°)
		7 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)
		9 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	32°59' (32.99°)
LJ150R-GKMEE	TX	5 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°57' (32.94°)
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)
		7 - Seater	-	34°17' to 37°17' (34.28° to 37.28°)	32°54' (32.91°)
			for Double Tank Type	34°18' to 37°18' (34.29° to 37.29°)	32°55' (32.92°)
		9 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°57' (32.94°)
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)
	TXL	5 - Seater	-	34°18' to 37°18' (34.29° to 37.29°)	32°55' (32.92°)
			for Double Tank Type	34°18' to 37°18' (34.30° to 37.30°)	32°57' (32.94°)
		7 - Seater	-	34°17' to 37°17' (34.28° to 37.28°)	32°53' (32.89°)
			for Double Tank Type	34°17' to 37°17' (34.28° to 37.28°)	32°54' (32.91°)
		9 - Seater	-	34°18' to 37°18' (34.29° to 37.29°)	32°55' (32.92°)
			for Double Tank Type	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.93°)
TX	5 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
		for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	32°59' (32.99°)	
	7 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.93°)	
		for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)	

TRJ150L-GKPEK	TXL	9 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)
			5 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)
		for Double Tank Type		34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)
		7 - Seater	-	34°17' to 37°17' (34.28° to 37.28°)	32°54' (32.90°)
			for Double Tank Type	34°18' to 37°18' (34.29° to 37.29°)	32°55' (32.92°)
9 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°57' (32.94°)		
TRJ150L-GKMEK	TX	5 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	32°59' (32.99°)
		7 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.93°)
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)
	TXL	5 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°57' (32.94°)
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)
		7 - Seater	-	34°17' to 37°17' (34.28° to 37.28°)	32°54' (32.90°)
			for Double Tank Type	34°18' to 37°18' (34.29° to 37.29°)	32°55' (32.92°)
TRJ150R-GKMEK	TX	5 - Seater	-	34°20' to 37°20' (34.33° to 37.33°)	33°0' (33.00°)
			for Double Tank Type	34°21' to 37°21' (34.34° to 37.34°)	33°1' (33.02°)
		7 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)
			for Double Tank Type	34°19' to 37°19' (34.32° to 37.32°)	32°59' (32.98°)
	TXL	5 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°59' (32.98°)
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	33°0' (33.00°)
		7 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°57' (32.94°)
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)
TX	2 - Seater	-	34°15' to 37°15' (34.25° to 37.25°)	32°51' (32.85°)	
		for Cold Area	34°13' to 37°13' (34.22° to 37.22°)	32°47' (32.79°)	
	5 - Seater	-	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.80°)	
		for Cold Area	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.74°)	
		Spare Tire Less	34°15' to 37°15' (34.25° to 37.25°)	32°51' (32.85°)	
		-	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.77°)	

KDJ150L- GKAEYW	TXL	7 - Seater	-	37.21°	
			for Cold Area	34°11' to 37°11' (34.18° to 37.18°)	32°42' (32.71°)
		2 - Seater	-	34°14' to 37°14' (34.23° to 37.23°)	32°49' (32.81°)
			for Cold Area	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.77°)
		5 - Seater	-	34°13' to 37°13' (34.22° to 37.22°)	32°47' (32.78°)
			for Cold Area	34°11' to 37°11' (34.19° to 37.19°)	32°43' (32.72°)
		7 - Seater	-	34°12' to 37°12' (34.20° to 37.20°)	32°44' (32.74°)
			for Cold Area	34°10' to 37°10' (34.17° to 37.17°)	32°41' (32.68°)
	VX	5 - Seater	-	34°13' to 37°13' (34.22° to 37.22°)	32°46' (32.77°)
			for Cold Area	34°12' to 37°12' (34.21° to 37.21°)	32°45' (32.76°)
		7 - Seater	-	34°12' to 37°12' (34.20° to 37.20°)	32°44' (32.74°)
			for Cold Area	34°11' to 37°11' (34.19° to 37.19°)	32°43' (32.72°)
	VXL	5 - Seater	-	34°13' to 37°13' (34.22° to 37.22°)	32°46' (32.77°)
			for Cold Area	34°12' to 37°12' (34.21° to 37.21°)	32°45' (32.76°)
		7 - Seater	-	34°12' to 37°12' (34.20° to 37.20°)	32°44' (32.74°)
			for Cold Area	34°11' to 37°11' (34.19° to 37.19°)	32°43' (32.72°)
KDJ150L- GKFEYW	TX	2 - Seater	-	34°16' to 37°16' (34.27° to 37.27°)	32°53' (32.88°)
			for Cold Area	34°14' to 37°14' (34.24° to 37.24°)	32°49' (32.82°)
		5 - Seater	-	34°15' to 37°15' (34.25° to 37.25°)	32°50' (32.83°)
			for Cold Area	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.77°)
			Spare Tire Less	34°16' to 37°16' (34.26° to 37.26°)	32°52' (32.86°)
			-	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.79°)
		7 - Seater	for Cold Area	34°12' to 37°12' (34.20° to 37.20°)	32°44' (32.73°)
			-	34°15' to 37°15' (34.25° to 37.25°)	32°51' (32.85°)
	TXL	2 - Seater	for Cold Area	34°13' to 37°13' (34.22° to 37.22°)	32°47' (32.79°)
			-	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.79°)
		5 - Seater	for Cold Area	34°12' to 37°12' (34.20° to 37.20°)	32°44' (32.73°)
			-	34°12' to 37°12' (34.21° to 37.21°)	32°45' (32.76°)
	7 - Seater	-	34°11' to 37°11'		



KDJ150R-GKAEYW	VX	5 - Seater	-	for Cold Area	(34.18° to 37.18°)	32°42' (32.70°)
			-	for Cold Area	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.81°)
		7 - Seater	-	for Cold Area	34°13' to 37°13' (34.22° to 37.22°)	32°47' (32.79°)
			-	for Cold Area	34°13' to 37°13' (34.22° to 37.22°)	32°46' (32.77°)
		5 - Seater	-	for Cold Area	34°12' to 37°12' (34.21° to 37.21°)	32°45' (32.76°)
			-	for Cold Area	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.80°)
		7 - Seater	-	for Cold Area	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)
			-	for Cold Area	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.75°)
	TX	2 - Seater	-	for Cold Area	34°12' to 37°12' (34.21° to 37.21°)	32°45' (32.76°)
			-	for Cold Area	34°16' to 37°16' (34.27° to 37.27°)	32°53' (32.88°)
		5 - Seater	-	for Cold Area	34°11' to 37°11' (34.18° to 37.18°)	32°43' (32.71°)
			-	for Cold Area	34°15' to 37°15' (34.25° to 37.25°)	32°50' (32.84°)
		7 - Seater	Spare Tire Less	for Cold Area	34°12' to 37°12' (34.21° to 37.21°)	32°45' (32.76°)
			-	for Cold Area	34°10' to 37°10' (34.16° to 37.16°)	32°41' (32.68°)
		5 - Seater	-	for Cold Area	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.80°)
			-	for Cold Area	34°11' to 37°11' (34.19° to 37.19°)	32°43' (32.72°)
	TXL	2 - Seater	-	for Cold Area	34°16' to 37°16' (34.26° to 37.26°)	32°52' (32.86°)
			-	for Cold Area	34°10' to 37°10' (34.16° to 37.16°)	32°41' (32.68°)
		5 - Seater	-	for Cold Area	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.80°)
			-	for Cold Area	34°9' to 37°9' (34.14° to 37.14°)	32°39' (32.64°)
7 - Seater		-	for Cold Area	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)	
		-	for Cold Area	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)	
VX	5 - Seater	-	for Cold Area	34°12' to 37°12' (34.19° to 37.19°)	32°44' (32.73°)	
		-	for Cold Area	34°12' to 37°12' (34.19° to 37.19°)	32°44' (32.73°)	
	7 - Seater	-	for Cold Area	34°11' to 37°11' (34.18° to 37.18°)	32°42' (32.70°)	
		-	for Cold Area	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)	
5 - Seater	-	for Cold Area	34°12' to 37°12' (34.19° to 37.19°)	32°44' (32.73°)		
	-	for Cold Area	34°12' to 37°12' (34.19° to 37.19°)	32°44' (32.73°)		

KDJ150R-GKFEYW	VXL	7 - Seater	-	34°12' to 37°12' (34.19° to 37.19°)	32°44' (32.73°)
			for Cold Area	34°11' to 37°11' (34.18° to 37.18°)	32°42' (32.70°)
	TX	2 - Seater	-	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.79°)
			for Cold Area	34°17' to 37°17' (34.29° to 37.29°)	32°55' (32.92°)
		5 - Seater	-	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.75°)
			for Cold Area	34°16' to 37°16' (34.27° to 37.27°)	32°52' (32.87°)
			Spare Tire Less	34°13' to 37°13' (34.22° to 37.22°)	32°47' (32.78°)
		7 - Seater	-	34°11' to 37°11' (34.18° to 37.18°)	32°43' (32.71°)
			for Cold Area	34°15' to 37°15' (34.25° to 37.25°)	32°50' (32.84°)
		TXL	2 - Seater	-	34°12' to 37°12' (34.21° to 37.21°)
	for Cold Area			34°16' to 37°16' (34.27° to 37.27°)	32°53' (32.88°)
	5 - Seater		-	34°11' to 37°11' (34.18° to 37.18°)	32°42' (32.70°)
			for Cold Area	34°15' to 37°15' (34.24° to 37.24°)	32°50' (32.83°)
	7 - Seater		-	34°10' to 37°10' (34.17° to 37.17°)	32°41' (32.69°)
			for Cold Area	34°14' to 37°14' (34.24° to 37.24°)	32°49' (32.81°)
	VX	5 - Seater	-	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.80°)
			for Cold Area	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.77°)
		7 - Seater	-	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)
			for Cold Area	34°12' to 37°12' (34.19° to 37.19°)	32°44' (32.73°)
	VXL	5 - Seater	-	34°13' to 37°13' (34.22° to 37.22°)	32°47' (32.79°)
for Cold Area			34°12' to 37°12' (34.21° to 37.21°)	32°45' (32.76°)	
7 - Seater		-	34°12' to 37°12' (34.21° to 37.21°)	32°45' (32.75°)	
		for Cold Area	34°11' to 37°11' (34.19° to 37.19°)	32°43' (32.72°)	
TX	2 - Seater	-	34°15' to 37°15' (34.26° to 37.26°)	32°51' (32.85°)	
		5 - Seater	-	34°16' to 37°16' (34.27° to 37.27°)	32°52' (32.87°)
	7 - Seater	-	34°5' to 37°5' (34.08° to 37.08°) (*1) 34°15' to 37°15' (34.25° to 37.25°) (*2)	32°31' (32.52°) (*1) 32°50' (32.83°) (*2)	
		2 - Seater	-	34°15' to 37°15' (34.25° to 37.25°)	32°51'

GRJ150L-GKAEKW	TXL	5 - Seater	-	37.25°	(32.84°)
		5 - Seater	-	34°15' to 37°15' (34.24° to 37.24°) (*1) 34°4' to 37°4' (34.07° to 37.07°) (*2)	32°49' (32.82°) (*1) 32°31' (32.22°) (*2)
		7 - Seater	-	34°3' to 37°3' (34.05° to 37.05°)	32°29' (32.48°)
		7 - Seater	-	34°5' to 37°5' (34.08° to 37.08°)	32°32' (32.53°)
	VX	5 - Seater	-	34°4' to 37°4' (34.06° to 37.06°)	32°30' (32.49°)
		7 - Seater	-	34°5' to 37°5' (34.08° to 37.08°)	32°32' (32.53°)
	VXL	5 - Seater	-	34°4' to 37°4' (34.06° to 37.06°)	32°30' (32.49°)
		7 - Seater	-	34°5' to 37°5' (34.08° to 37.08°)	32°32' (32.53°)
GRJ150R-GKAEKW	TX	2 - Seater	-	34°6' to 37°6' (34.11° to 37.11°)	32°35' (32.58°)
		5 - Seater	-	34°6' to 37°6' (34.10° to 37.10°)	32°34' (32.56°)
		7 - Seater	-	34°15' to 37°15' (34.25° to 37.25°) (*1) 34°5' to 37°5' (34.08° to 37.08°) (*2)	32°50' (32.83°) (*1) 32°31' (32.52°) (*2)
	TXL	2 - Seater	-	34°5' to 37°5' (34.08° to 37.08°)	32°32' (32.53°)
		5 - Seater	-	34°4' to 37°4' (34.07° to 37.07°)	32°31' (32.52°)
		7 - Seater	-	34°13' to 37°13' (34.22° to 37.22°) (*1) 34°3' to 37°3' (34.05° to 37.05°) (*2)	32°47' (32.79°) (*1) 32°29' (32.48°) (*2)
	VX	5 - Seater	-	34°8' to 37°8' (34.13° to 37.13°) (*1) 34°18' to 37°18' (34.30° to 37.30°) (*2)	32°37' (32.62°) (*1) 32°56' (32.93°) (*2)
		7 - Seater	-	34°17' to 37°17' (34.28° to 37.28°)	32°53' (32.89°)
	VXL	5 - Seater	-	34°8' to 37°8' (34.13° to 37.13°) (*1) 34°18' to 37°18' (34.30° to 37.30°) (*2)	32°37' (32.62°) (*1) 32°56' (32.93°) (*2)
		7 - Seater	-	34°17' to 37°17' (34.28° to 37.28°)	32°53' (32.89°)
	TX	2 - Seater	-	33°60' to 36°60' (33.99° to 36.99°) (*1) 34°13' to 37°13' (34.21° to 37.21°) (*2)	32°33' (32.55°) (*1) 32°46' (32.76°) (*2)
			for Cold Area	34°1' to 37°1' (34.02° to 37.02°) (*1) 34°15' to 37°15' (34.26° to 37.26°) (*2)	32°36' (32.60°) (*1) 32°51' (32.85°) (*2)
5 - Seater		-	33°57' to 36°57' (33.96° to 36.96°) (*1) 34°10' to 37°10' (34.17° to 37.17°) (*2)	32°29' (32.48°) (*1) 32°42' (32.69°) (*2)	
		for Cold Area	33°59' to 36°59' (33.98° to 36.98°) (*1)	32°32' (32.53°) (*1)	

KDJ155L-GJAEYW

TXL

VX

TX

			34°13' to 37°13' (34.22° to 37.22°) (*2)	32°47' (32.78°) (*2)
		Spare Tire Less	33°58' to 36°58' (33.97° to 36.97°)	32°30' (32.50°)
		Spare Tire Less for Cold Area	33°60' to 36°60' (33.99° to 36.99°)	32°33' (32.55°)
2 - Seater	-		33°59' to 36°59' (33.98° to 36.98°) (*1) 34°12' to 37°12' (34.20° to 37.20°) (*2)	32°32' (32.53°) (*1) 32°44' (32.74°) (*2)
	for Cold Area		34°1' to 37°1' (34.01° to 37.01°) (*1) 34°15' to 37°15' (34.25° to 37.25°) (*2)	32°35' (32.58°) (*1) 32°50' (32.84°) (*2)
5 - Seater	-		33°56' to 36°56' (33.94° to 36.94°) 34°9' to 37°9' (34.16° to 37.16°) (*2)	32°27' (32.46°) (*1) 32°40' (32.66°) (*2)
	for Cold Area		33°58' to 36°58' (33.97° to 36.97°) (*1) 34°12' to 37°12' (34.21° to 37.21°) (*2)	32°30' (32.50°) (*1) 32°45' (32.76°) (*2)
	Spare Tire Less		33°57' to 36°57' (33.95° to 36.95°)	32°29' (32.48°)
	Spare Tire Less for Cold Area		33°59' to 36°59' (33.98° to 36.98°)	32°31' (32.52°)
5 - Seater	-		33°53' to 36°53' (33.89° to 36.89°) (*1) 34°6' to 37°6' (34.11° to 37.11°) (*2)	32°22' (32.37°) (*1) 32°34' (32.57°) (*2)
	for Cold Area		33°55' to 36°55' (33.92° to 36.92°) (*1) 34°10' to 37°10' (34.16° to 37.16°) (*2)	32°25' (32.42°) (*1) 32°40' (32.67°) (*2)
	Spare Tire Less		33°54' to 36°54' (33.90° to 36.90°)	32°23' (32.39°)
	Spare Tire Less for Cold Area		33°56' to 36°56' (33.93° to 36.93°)	32°26' (32.44°)
2 - Seater	-		34°1' to 37°1' (34.02° to 37.02°) (*1) 34°14' to 37°14' (34.23° to 37.23°) (*2)	32°35' (32.59°) (*1) 32°48' (32.80°) (*2)
	for Cold Area		33°56' to 36°56' (33.94° to 36.94°) (*1) 34°9' to 37°9' (34.15° to 37.15°) (*2)	32°27' (32.45°) (*1) 32°40' (32.66°) (*2)
5 - Seater	-		33°59' to 36°59' (33.98° to 36.98°) (*1) 34°12' to 37°12' (34.19° to 37.19°) (*2)	32°31' (32.52°) (*1) 32°44' (32.73°) (*2)
	for Cold Area		33°54' to 36°54' (33.90° to 36.90°) (*1) 34°7' to 37°7' (34.11° to 37.11°) (*2)	32°23' (32.39°) (*1) 32°35' (32.59°) (*2)
	Spare Tire Less		33°59' to 36°59' (33.99° to 36.99°)	32°32' (32.54°)
	Spare Tire Less for Cold Area		33°55' to 36°55' (33.91° to 36.91°)	32°24' (32.41°)

KDJ155L-  
GJFEYW

TXL	2 - Seater	-	33°60' to 36°60' (33.99° to 36.99°) (*1) 34°13' to 37°13' (34.21° to 37.21°) (*2)	32°33' (32.55°) (*1) 32°46' (32.76°) (*2)	
		for Cold Area	34°1' to 37°1' (34.02° to 37.02°) (*1) 34°15' to 37°15' (34.26° to 37.26°) (*2)	32°36' (32.60°) (*1) 32°51' (32.85°) (*2)	
	5 - Seater	-	33°57' to 36°57' (33.96° to 36.96°) (*1) 34°10' to 37°10' (34.17° to 37.17°) (*2)	32°29' (32.48°) (*1) 32°42' (32.69°) (*2)	
		for Cold Area	33°59' to 36°59' (33.98° to 36.98°) (*1) 34°13' to 37°13' (34.22° to 37.22°) (*2)	32°32' (32.53°) (*1) 32°47' (32.78°) (*2)	
		Spare Tire Less	33°58' to 36°58' (33.97° to 36.97°)	32°30' (32.50°)	
		Spare Tire Less for Cold Area	33°60' to 36°60' (33.99° to 36.99°)	32°33' (32.55°)	
	VX	5 - Seater	-	33°55' to 36°55' (33.91° to 36.91°) (*1) 34°8' to 37°8' (34.13° to 37.13°) (*2)	32°25' (32.41°) (*1) 32°37' (32.61°) (*2)
			for Cold Area	33°56' to 36°56' (33.94° to 36.94°) (*1) 34°11' to 37°11' (34.18° to 37.18°) (*2)	32°27' (32.46°) (*1) 32°42' (32.71°) (*2)
			Spare Tire Less	33°55' to 36°55' (33.92° to 36.92°)	32°26' (32.43°)
			Spare Tire Less for Cold Area	33°57' to 36°57' (33.95° to 36.95°)	32°29' (32.48°)
TX	2 - Seater	-	33°55' to 36°55' (33.92° to 36.92°) (*1) 34°9' to 37°9' (34.15° to 37.15°) (*2)	32°25' (32.42°) (*1) 32°40' (32.66°) (*2)	
		for Cold Area	33°57' to 36°57' (33.95° to 36.95°)	32°28' (32.47°)	
	5 - Seater	-	33°53' to 36°53' (33.89° to 36.89°) (*1) 34°7' to 37°7' (34.12° to 37.12°) (*2)	32°22' (32.37°) (*1) 32°36' (32.60°) (*2)	
		for Cold Area	33°55' to 36°55' (33.92° to 36.92°)	32°25' (32.41°)	
		Spare Tire Less	33°54' to 36°54' (33.89° to 36.89°)	32°23' (32.38°)	
		Spare Tire Less for Cold Area	33°55' to 36°55' (33.92° to 36.92°)	32°25' (32.42°)	
	TXL	2 - Seater	-	33°54' to 36°54' (33.90° to 36.90°) (*1) 34°8' to 37°8' (34.13° to 37.13°) (*2)	32°23' (32.39°) (*1) 32°37' (32.62°) (*2)
			for Cold Area	33°56' to 36°56' (33.94° to 36.94°)	32°27' (32.45°)
-		33°52' to 36°52' (33.87° to 36.87°) (*1) 34°6' to 37°6' (34.10° to	32°20' (32.33°) (*1) 32°34' (32.56°) (*2)		

KDJ155R-  
GJAEYW

		5 - Seater		37.10° (*2)		
			for Cold Area	33°54' to 36°54' (33.89° to 36.89°)	32°23' (32.38°)	
			Spare Tire Less	33°53' to 36°53' (33.88° to 36.88°)	32°21' (32.35°)	
			Spare Tire Less for Cold Area	33°54' to 36°54' (33.90° to 36.90°)	32°24' (32.40°)	
	VX	5 - Seater	-	33°58' to 36°58' (33.96° to 36.96°) (*1) 34°10' to 37°10' (34.16° to 37.16°) (*2)	32°30' (32.50°) (*1) 32°40' (32.67°) (*2)	
			for Cold Area	33°60' to 36°60' (33.99° to 36.99°)	32°33' (32.55°)	
			Spare Tire Less	33°58' to 36°58' (33.97° to 36.97°)	32°31' (32.51°)	
			Spare Tire Less for Cold Area	34°0' to 37°0' (34.00° to 37.00°)	32°34' (32.56°)	
	KDJ155R-GJFEYW	TX	2 - Seater	-	33°57' to 36°57' (33.94° to 36.94°) (*1) 34°11' to 37°11' (34.18° to 37.18°) (*2)	32°28' (32.46°) (*1) 32°42' (32.70°) (*2)
				for Cold Area	33°58' to 36°58' (33.97° to 36.97°)	32°30' (32.51°)
			5 - Seater	-	33°54' to 36°54' (33.91° to 36.91°) (*1) 34°8' to 37°8' (34.14° to 37.14°) (*2)	32°24' (32.40°) (*1) 32°38' (32.63°) (*2)
				for Cold Area	33°56' to 36°56' (33.93° to 36.93°)	32°27' (32.44°)
Spare Tire Less				33°55' to 36°55' (33.92° to 36.92°)	32°25' (32.42°)	
Spare Tire Less for Cold Area				33°57' to 36°57' (33.94° to 36.94°)	32°28' (32.46°)	
TXL		2 - Seater	-	33°55' to 36°55' (33.92° to 36.92°) (*1) 34°9' to 37°9' (34.15° to 37.15°) (*2)	32°25' (32.42°) (*1) 32°40' (32.66°) (*2)	
			for Cold Area	33°57' to 36°57' (33.95° to 36.95°)	32°28' (32.47°)	
		5 - Seater	-	33°53' to 36°53' (33.88° to 36.88°) (*1) 34°7' to 37°7' (34.12° to 37.12°) (*2)	32°22' (32.36°) (*1) 32°36' (32.59°) (*2)	
			for Cold Area	33°55' to 36°55' (33.91° to 36.91°)	32°24' (32.41°)	
			Spare Tire Less	33°54' to 36°54' (33.90° to 36.90°)	32°23' (32.39°)	
			Spare Tire Less for Cold Area	33°56' to 36°56' (33.93° to 36.93°)	32°26' (32.43°)	
VX	5 - Seater	-	33°59' to 36°59' (33.98° to 36.98°) (*1) 34°11' to 37°11' (34.18° to 37.18°) (*2)	32°32' (32.53°) (*1) 32°43' (32.71°) (*2)		
		for Cold Area	33°52' to 36°52' (33.87° to 36.87°)	32°20' (32.33°)		
		Spare Tire Less	33°60' to 36°60' (34.00° to 37.00°)	32°33' (32.55°)		

			Spare Tire Less for Cold Area	33°53' to 36°53' (33.88° to 36.88°)	32°21' (32.35°)	
KDJ150R-GKAEYQ	TX	5 - Seater	-	34°21' to 37°21' (34.36° to 37.36°)	33°3' (33.04°)	
			for Double Tank Type	34°22' to 37°22' (34.36° to 37.36°)	33°4' (33.06°)	
		7 - Seater	-	34°20' to 37°20' (34.34° to 37.34°)	33°0' (33.01°)	
			for Double Tank Type	34°21' to 37°21' (34.35° to 37.35°)	33°2' (33.03°)	
	TXL	7 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	32°59' (32.99°)	
	VX	7 - Seater	-	34°11' to 37°11' (34.18° to 37.18°)	32°43' (32.71°)	
			for Double Tank Type	34°11' to 37°11' (34.19° to 37.19°)	32°44' (32.73°)	
	VXL	7 - Seater	-	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.77°)	
			for Double Tank Type	34°10' to 37°10' (34.17° to 37.17°)	32°41' (32.68°)	
	KDJ150R-GKFEYQ	TX	5 - Seater	-	34°17' to 37°17' (34.28° to 37.28°)	32°54' (32.90°)
				for Double Tank Type	34°17' to 37°17' (34.29° to 37.29°)	32°55' (32.92°)
7 - Seater			-	34°21' to 37°21' (34.35° to 37.35°)	33°2' (33.03°)	
			for Double Tank Type	34°22' to 37°22' (34.36° to 37.36°)	33°3' (33.05°)	
TXL		7 - Seater	-	34°15' to 37°15' (34.24° to 37.24°)	32°50' (32.83°)	
			for Double Tank Type	34°15' to 37°15' (34.25° to 37.25°)	32°51' (32.84°)	
VX		7 - Seater	-	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.74°)	
			for Double Tank Type	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)	
VXL		7 - Seater	-	34°11' to 37°11' (34.18° to 37.18°)	32°43' (32.71°)	
			for Double Tank Type	34°11' to 37°11' (34.19° to 37.19°)	32°44' (32.73°)	
GRJ150R-GKAEKQ		TX	5 - Seater	-	34°21' to 37°21' (34.35° to 37.35°)	33°2' (33.03°)
				for Double Tank Type	34°21' to 37°21' (34.36° to 37.36°)	33°3' (33.05°)
	7 - Seater		-	34°20' to 37°20' (34.33° to 37.33°)	32°60' (32.99°)	
			for Double Tank Type	34°20' to 37°20' (34.34° to 37.34°)	33°1' (33.01°)	
	TXL	7 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)	
			for Double Tank Type	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
				-	34°16' to 37°16' (34.27° to 37.27°)	32°52' (32.87°)

GRJ150R- GKFEKQ	VX	7 - Seater		37.27°)	
			for Double Tank Type	34°17' to 37°17' (34.28° to 37.28°)	32°53' (32.89°)
	VXL	7 - Seater		34°15' to 37°15' (34.25° to 37.25°)	32°50' (32.84°)
			for Double Tank Type	34°15' to 37°15' (34.26° to 37.26°)	32°51' (32.85°)
	TX	5 - Seater		34°22' to 37°22' (34.36° to 37.36°)	33°3' (33.06°)
			for Double Tank Type	34°22' to 37°22' (34.37° to 37.37°)	33°53' (33.08°)
		7 - Seater		34°21' to 37°21' (34.34° to 37.34°)	33°1' (33.02°)
			for Double Tank Type	34°21' to 37°21' (34.35° to 37.35°)	33°2' (33.04°)
		7 - Seater		34°19' to 37°19' (34.32° to 37.32°)	32°59' (32.98°)
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	33°0' (33.00°)
	VX	7 - Seater		34°17' to 37°17' (34.29° to 37.29°)	32°55' (32.91°)
			for Double Tank Type	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.93°)
7 - Seater			34°16' to 37°16' (34.27° to 37.27°)	32°52' (32.87°)	
		for Double Tank Type	34°17' to 37°17' (34.29° to 37.29°)	32°55' (32.91°)	
KDJ155R- GJAEYW	TX	5 - Seater	-	34°20' to 37°20' (34.34° to 37.34°)	33°0' (33.00°)
	TXL	5 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)
	VX	5 - Seater	-	34°16' to 37°16' (34.27° to 37.27°)	32°53' (32.88°)
KDJ150L- GKAEYV	TX	5 - Seater		34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)
		7 - Seater		34°17' to 37°17' (34.28° to 37.28°)	32°54' (32.90°)
			for Double Tank Type	34°17' to 37°17' (34.29° to 37.29°)	32°55' (32.92°)
		9 - Seater		34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)
	TXL	5 - Seater		34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)
		7 - Seater		34°15' to 37°15' (34.25° to 37.25°)	32°51' (32.85°)
			for Double Tank Type	34°16' to 37°16' (34.26° to 37.26°)	32°52' (32.86°)
		9 - Seater		34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)
				34°19' to 37°19'	



			for Double Tank Type	(34.31° to 37.31°)	32°57' (32.95°)	
	VX	7 - Seater	-	34°11' to 37°11' (34.18° to 37.18°)	32°43' (32.71°)	
			for Double Tank Type	34°12' to 37°12' (34.19° to 37.19°)	32°44' (32.73°)	
	VXL	7 - Seater	-	34°11' to 37°11' (34.18° to 37.18°)	32°42' (32.70°)	
			for Double Tank Type	34°11' to 37°11' (34.19° to 37.19°)	32°43' (32.72°)	
KDJ150L-GKFEYV	TX	5 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	32°59' (32.99°)	
		7 - Seater	-	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)	
			for Double Tank Type	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)	
		9 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	32°59' (32.99°)	
	TXL	5 - Seater	-	34°17' to 37°17' (34.29° to 37.29°)	32°55' (32.92°)	
			for Double Tank Type	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)	
		7 - Seater	-	34°16' to 37°16' (34.27° to 37.27°)	32°53' (32.88°)	
			for Double Tank Type	34°17' to 37°17' (34.28° to 37.28°)	32°54' (32.90°)	
		9 - Seater	-	34°17' to 37°17' (34.29° to 37.29°)	32°55' (32.92°)	
			for Double Tank Type	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)	
	VX	7 - Seater	-	34°12' to 37°12' (34.20° to 37.20°)	32°45' (32.75°)	
			for Double Tank Type	34°13' to 37°13' (34.21° to 37.21°)	32°46' (32.76°)	
	VXL	7 - Seater	-	34°12' to 37°12' (34.20° to 37.20°)	32°44' (32.74°)	
			for Double Tank Type	34°12' to 37°12' (34.21° to 37.21°)	32°45' (32.75°)	
	TX	5 - Seater	-	34°20' to 37°20' (34.34° to 37.34°)	33°1' (33.01°)	
			for Double Tank Type	34°21' to 37°21' (34.35° to 37.35°)	33°2' (33.03°)	
		7 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
			for Double Tank Type	34°20' to 37°20' (34.33° to 37.33°)	32°60' (32.99°)	
		9 - Seater	-	34°20' to 37°20' (34.34° to 37.34°)	33°1' (33.01°)	
			for Double Tank Type	34°21' to 37°21' (34.35° to 37.35°)	33°2' (33.03°)	
				-	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)

GRJ150L-GKAEKV	TXL	5 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
			for Double Tank Type	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
		7 - Seater	-	34°17' to 37°17' (34.29° to 37.29°)	32°55' (32.92°)	
			for Double Tank Type	34°18' to 37°18' (34.30° to 37.30°)	32°56' (32.94°)	
		9 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)	
			for Double Tank Type	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
	VX	7 - Seater	-	34°13' to 37°13' (34.22° to 37.22°)	32°47' (32.78°)	
			for Double Tank Type	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.80°)	
	VXL	7 - Seater	-	34°13' to 37°13' (34.22° to 37.22°)	32°46' (32.77°)	
			for Double Tank Type	34°14' to 37°14' (34.23° to 37.23°)	32°48' (32.79°)	
	GRJ150L-GKFEKV	TX	5 - Seater	-	34°21' to 37°21' (34.36° to 37.36°)	33°3' (33.05°)
				for Double Tank Type	34°22' to 37°22' (34.37° to 37.37°)	33°4' (33.07°)
7 - Seater			-	34°20' to 37°20' (34.34° to 37.34°)	33°1' (33.01°)	
			for Double Tank Type	34°21' to 37°21' (34.35° to 37.35°)	33°2' (33.03°)	
9 - Seater			-	34°21' to 37°21' (34.36° to 37.36°)	33°3' (33.05°)	
			for Double Tank Type	34°22' to 37°22' (34.37° to 37.37°)	33°4' (33.07°)	
TXL		5 - Seater	-	34°20' to 37°20' (34.33° to 37.33°)	32°60' (32.99°)	
			for Double Tank Type	34°20' to 37°20' (34.34° to 37.34°)	33°1' (33.01°)	
		7 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)	
			for Double Tank Type	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)	
		9 - Seater	-	34°20' to 37°20' (34.33° to 37.33°)	32°60' (32.99°)	
			for Double Tank Type	34°20' to 37°20' (34.34° to 37.34°)	33°1' (33.01°)	
VX		7 - Seater	-	34°14' to 37°14' (34.24° to 37.24°)	32°49' (32.82°)	
			for Double Tank Type	34°15' to 37°15' (34.25° to 37.25°)	32°50' (32.84°)	
		7 - Seater	-	34°14' to 37°14' (34.23° to 37.23°)	32°49' (32.81°)	
			for Double Tank Type	34°15' to 37°15' (34.24° to 37.24°)	32°50' (32.83°)	
TX		5 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)	
		7 - Seater	-	34°17' to 37°17' (34.29° to 37.29°)	32°55' (32.91°)	
		9 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°57'	

TRJ150L-GKPEKV	TXL	5 - Seater	-	37.31°	(32.95°)
		7 - Seater	-	34°18' to 37°18' (34.29° to 37.29°)	32°55' (32.92°)
		9 - Seater	-	34°16' to 37°16' (34.27° to 37.27°)	32°53' (32.88°)
TRJ150L-GKMEKV	TX	5 - Seater	-	34°20' to 37°20' (34.33° to 37.33°)	32°59' (32.99°)
		7 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°57' (32.95°)
		9 - Seater	-	34°20' to 37°20' (34.33° to 37.33°)	32°59' (32.99°)
	TXL	5 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)
		7 - Seater	-	34°18' to 37°18' (34.29° to 37.29°)	32°55' (32.92°)
		9 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)
TRJ155L-GKPEKV	TX	5 - Seater	-	34°19' to 37°19' (34.32° to 37.32°)	32°58' (32.97°)
	TXL	5 - Seater	-	34°19' to 37°19' (34.31° to 37.31°)	32°58' (32.96°)

(\*1) Light duty

(\*2) Hard duty

If the right and left inside wheel angles differ from the specified range, check the right and left rack end lengths.

## 9. PLACE FRONT WHEELS FACING STRAIGHT AHEAD

## 10. PERFORM YAW RATE SENSOR ZERO POINT CALIBRATION

- a. for 1GR-FE, 1KD-FTV:  
Perform the yaw rate sensor zero point calibration ([Click here](#)).
- b. for 2TR-FE:  
Perform the yaw rate sensor zero point calibration ([Click here](#)).
- c. for 5L-E:  
Perform the acceleration sensor zero point calibration ([Click here](#)).

## 11. PERFORM INITIALIZATION

### HINT:

Some systems need to be initialized after the wheel alignment is adjusted ([Click here](#)).

